



Agilent 81180A Arbitrary Waveform Generator

Datasheet Preliminary 0.9




When signal fidelity matters – test with confidence
4.2 GSa/s Arbitrary Waveform Generator with 12 bit vertical resolution



81180A at a glance

- 10 MS/s to 4.2 GSa/s sample clock control
- 12 bit vertical resolution
- 1 or 2 channel, coupled or uncoupled
- Two 2 channel systems can be synchronized to form a four-channel system
- Inter-channel skew control from -3 ns to +3 ns with 10 ps resolution
- Three software selectable amplifier, optimized for
 - I/Q applications with 1 GHz, differential DC coupled output
 - Maximum bandwidth and flatness for direct RF applications with AC output bandwidth to > 1.5GHz
 - Time domain applications with low overshoot and jitter
- 16 M points or 64 M points per channel
- 8-bit external input for dynamic control of segments and sequences
- Advanced sequencing scenarios define stepping, looping, and conditional jumps of waveforms or waveform sequences
- Smart trigger allows: trigger hold-off, and detect \Leftrightarrow pulse width
- Trigger input is programmed to wait-for-waveform-end or abort waveform and restart
- Two markers for each channel have controlled marker positions, width and levels
- Markers do not reduce DAC bits
- Internal flash memory stores large waveform banks
- Remote control through LAN, USB and GPIB
- Waveforms and instrument settings can be uploaded from disk-on-key
- LXI Class C compliant
- Fully controllable via Web interface
- Software
 - Integration in Matlab, LabView and Signal Studio

Front Panel

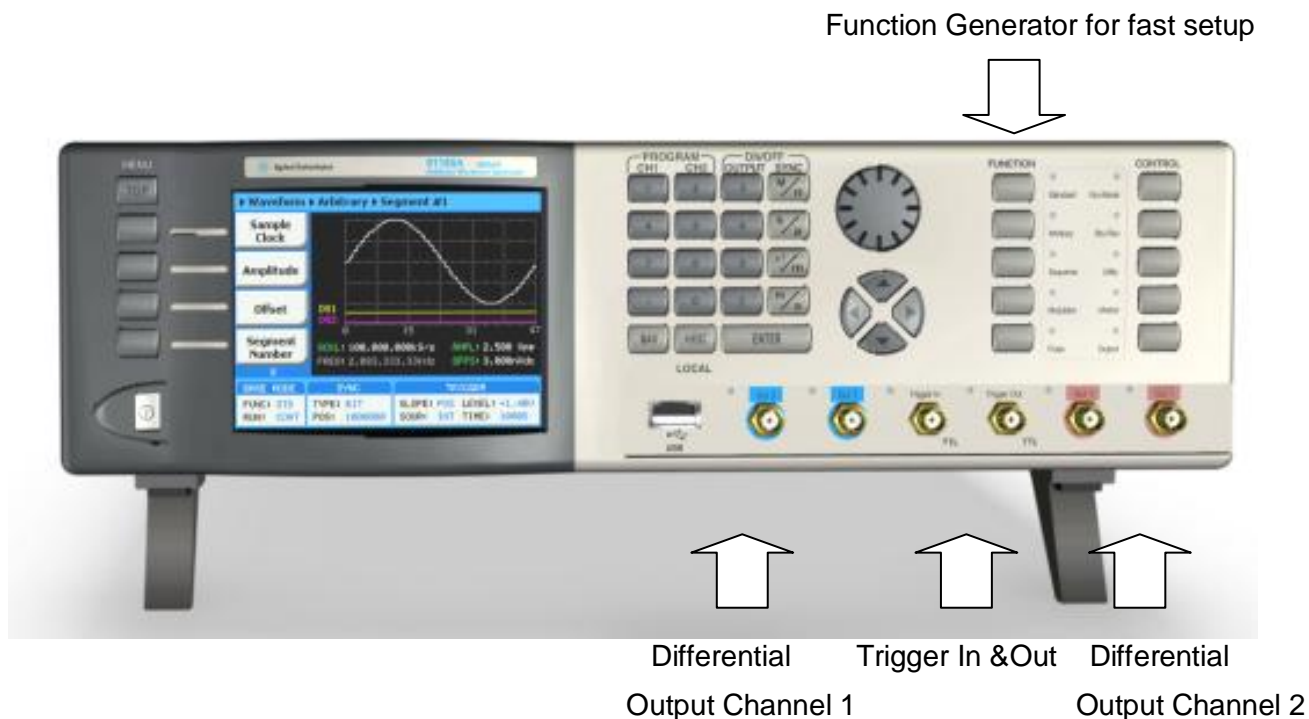

Back Panel

Internal and external clock



8 bit external segment
Select input

Synchronization
Cable to form a
4-channel instrument

Event In, Ref In

Remote Control
through
LAN, USB and GPIB

Electrical Specifications

Instrument configuration

Characteristics	Description
81180A	4.2 GSa/s arbitrary waveform generator with three output paths, dc coupled direct DAC output with 1 GHz bandwidth, dc coupled 2V amplifier with >600 MHz analog bandwidth or, ac coupled 5dBm amplifier with 1.5 GHz analog bandwidth
81180A-116	Single channel instrument with 16,000,000 waveform points
81180A-216	Dual channel instrument with 16,000,000 waveform points
81180A-264	Dual channel instrument with 64,000,000 waveform points
81180A-SYN	Synchronization cable to synchronize two dual channel 81180A to form a four channel 4.2 GSa/s arbitrary waveform generator system
81180A-F4G	Reconstruction filterset for 4 GSa/s

Inter-channel offset control (Course tuning – Dual-channel versions only)

Characteristics	Description
Initial skew	200 ps
Control	
Range	0 to \pm waveform-length points
Resolution	8 points
Accuracy	Same as sample clock accuracy

Inter-channel skew control (Fine Tuning – Dual-channel versions only)

Characteristics	Description
Initial skew	200 ps
Control	
Range	-3 ns to +3 ns
Resolution	10 ps
Accuracy	\pm (10% of setting + 20 ps)

Waveform type

Characteristics	Description
Standard	A waveform is selected from a built in library. The standard waveform parameters are programmable
Arbitrary	Arbitrary waveform coordinates are downloaded and stored in memory segments. The arbitrary waveform parameters are programmable
Sequenced	Arbitrary waveforms are downloaded and stored in memory segments. The segments are arranged in a sequence table that step, loop, jump and nest on segments in a user-defined configuration. Conditional jump and nest pending an event signal
Advanced Sequences	Same functionality as described for sequenced waveforms except sequences are arranged in the sequence table
Modulated	A modulated waveform is calculated from a built in library of modulation schemes
Pulse	A pulse waveform is calculated and downloaded to the arbitrary waveform memory.

Run mode

Characteristics	Description
Continuous	A selected output function shape is output continuously
Self armed	No start commands are required to generate waveforms
Armed	The output dwells on a dc level and waits for an enable command and then the output waveform is output continuously; An abort command turns off the waveform
Triggered	A trigger signal activates a single-shot or counted burst of output waveforms and then the instrument waits for the next trigger signal
Normal mode	The first trigger signal activates the output; consecutive triggers are ignored for the duration of the output waveform
Override mode	The first trigger signal activates the output; consecutive triggers restart the output waveform regardless if the current waveform has been completed or not
Gated	A waveform is output when a gate signal is asserted. The waveform is repeated until the gate signal is de-asserted. Last period is always completed

Standard Waveforms

Characteristics	Description
General	Waveforms are computed and generated every time a standard waveform is selected.
Standard waveform library	Built-in, auto computed waveforms: sine, triangle, square, ramp, pulse, sinc, exponential rise, exponential decay, gaussian, noise and dc.
Standard waveform control	The standard waveform parameters can be adjusted to specific requirements. The waveform is re-computed with each parameter change.

Standard waveforms frequency Control

Characteristics	Description
Range	10 kHz to 250 MHz, useable to higher frequency, depending on the waveform length
Resolution	8 digits
Accuracy	
Internal reference	≤1 ppm from 19°C to 29°C; 1ppm/°C below 19°C or above 29°C; ≤1 ppm/year aging rate
External reference	Same as accuracy and stability of the external reference. Reference is applied to the

reference input

Arbitrary Waveforms

Characteristics	Description
General	Arbitrary Waveforms are created on a remote computer and downloaded to the arbitrary waveform memory through one of the available remote interfaces. The frequency of the waveform is calculated from its programmed sample clock value and the number of waveform points that were used for creating the waveform
Waveform length	256 to 16,000,000 points (256 to 64,000,000 with option 264), in multiples of 32 points
Waveform granularity	1 point
Number of waveforms	1 to 16,000 limited by segment size $\times 16,000 \leq 16,000,000$ ($\leq 64,000,000$ with option 1)
Dynamic waveform control	Software command or rear panel segment control port (D-sub, 8 bit lines)
Waveform jump timing	Coherent or asynchronous, selectable
DAC resolution	12 bits
Waveform creation utilities	Waveform Editor creates complex arbitrary and sequenced waveforms.

Sequenced Waveforms

Characteristics	Description
General	Segments are grouped in a sequence table that links, loops and jumps to next in user-defined scenarios. Sequence steps are advanced on trigger events or remote commands. Each channel has its own sequence scenario
Sequence scenario	1 to 1,000 unique scenarios, programmed in sequence tables
Sequence table length	1 to 16k steps. 32 ns minimum step duration
Step advance control	Auto, once (x "N") and stepped
Loop counter	
Segment loops	1 to 1,000,000 cycles, each segment
Sequence loops	1 to 1,000,000 (applies to "Once" sequence advance mode only)

Advanced Sequencing

Characteristics	Description
General	Enables the grouping of sequences into scenarios in a way that is similar to how segments are grouped in a sequence table. Each channel has its own advance sequencing generator
Sequence scenario	1 scenario, programmed in advanced sequence tables
Dynamic sequence control	Software command or rear panel sequence control port (D-sub, 8 bit lines)
Sequence table length	1 to 1k steps $[\sum (\# \text{ of segments within a step}) \times (\# \text{ of sequences}) \leq 32k]$
Step advance control	Auto, once and stepped
Loop counter	1 to 1,000,000 cycles, each segment

Arbitrary/sequenced waveforms Sample Clock Control

Characteristics	Description
Range	10 MSa/s to 4.2 GSa/s , common or separate for each channel
Resolution	8 digits
Accuracy	
Internal reference	≤1 ppm from 19°C to 29°C; 1ppm/°C below 19°C or above 29°C; 1 ppm/year aging rate
External reference	Same as accuracy and stability of the external reference. Reference is applied to the reference input or sample clock input

Analog outputs

Characteristics	Description
General	DC-coupled amplified or Direct DAC or AC-coupled amplified output, selectable
Connector type	SMA
ON/OFF control	Output is turned On or OFF for each channel independently

DC-coupled analog output

		Description	
Characteristics	Amplified output	Direct DAC output	
Type of output	Single-ended ¹⁾ or differential		
Impedance	50 Ω		
Amplitude control	Specified into 50 Ω, levels double into high impedance		
Range, single-ended	50 mVp-p to 2 Vp-p	50 mV to 500 mV	
Range, differential	100 mVp-p to 4 Vp-p	50 mV to 1 Vp-p	
Resolution	3 digits		
Accuracy, offset = 0 V	±(3% +5 mV)		
Offset control	Common mode, specified into 50 Ω, levels double into high impedance		
Range	-1.5 V to + 1.5 V		
Resolution	3 digits		
Accuracy	±(5% +5 mV)		
Rise/fall time (10% to 90%)	600 ps, typical	350 ps, typical	
Bandwidth	600 MHz, typical (calculated)	1 GHz, typical (calculated)	
Overshoot	5%, typical	7%, typical	
Harmonic distortion ²⁾	-52 dBc, 1 Vp-p	-58 dBc, 0.5 Vp-p	
Non harmonic distortion ²⁾	-76 dBc, 1 Vp-p, DC to 600 MHz	-66 dBc, 0.5 Vp-p, DC to 1 GHz	
SCLK/2 spur ³⁾	1 Vp-p	0.5 Vp-p amplitude	
200 MHz	-42 dBc	-28 dBc	
500 MHz	-40 dBc	-27 dBc	
800 MHz	-36 dBc	-26 dBc	
SCLK/2-f _{out} spur ³⁾	1 Vp-p, 0 V offset, 4.2 GSa/s	0.5 Vp-p, 0 V offset, 4.2 GSa/s	
200 MHz	-50 dBc	-36 dBc	
500 MHz	-48 dBc	-36 dBc	
800 MHz	-42 dBc	-29 dBc	
Phase Noise ³⁾	<90 dBc/Hz, 1 Vp-p, 10 kHz offset		<90 dBc/Hz, 0.5 Vp-p, 10 kHz offset

¹⁾ The unused output must be terminated with 50 Ω to ground

²⁾ offset=0 V, SCLK=4.2 GSa/s, 32 points sine waveform (131.25 MHz output frequency), typical values

³⁾ offset=0 V, SCLK=4.2GSa/s, arbitrary waveforms, typical values

RF, AC-coupled analog output

Characteristics	Description
Type of output	Single-ended ¹⁾
Impedance	50 Ω
Amplitude control	Specified into 50 Ω, levels double into high impedance
Range	-5 dBm to 5 dBm
Resolution	3 digits
Accuracy	±(3% +0.5dBm)
Bandwidth	1.5 GHz, typical
Flatness	±1dB, typical

RF, AC-coupled analog output (continued)

Characteristics	Description
Harmonic distortion ²⁾	-50 dBm
Non harmonic distortion ²⁾	-65 dBm, DC to 1.5 GHz
SCLK/2 spur ³⁾	0 dBm, 4.2 GSa/s
200 MHz	-46 dBc
500 MHz	-44 dBc
800 MHz	-42 dBc
SCLK/2- f_{out} spur ³⁾	0 dBm, 4.2 GSa/s
200 MHz	-49 dBc
500 MHz	-35 dBc
800 MHz	-35 dBc
Phase Noise	<90 dBc/Hz, 0 dBm, 10 kHz offset

¹⁾ The unused output can be left open

²⁾ SCLK=4.2 GSa/s, 32 points sine waveform (131.25 MHz output frequency), 0 dBm

³⁾ SCLK=4.2GSa/s, arbitrary waveforms, typical values

Marker outputs

Characteristics	Description
Connector type	SMB
Number of markers	Two markers per channel
Skew between Marker 1 and Marker 2	100 ps, typical
Type of output	Differential (+) and (-) outputs
Impedance	50 Ω
Level control	Specified into 50 Ω, levels double into high impedance
Voltage window	0V to 1.25 V, single-ended; 0V to 2.5 V, differential
Low level	0 V to 0.8 V, single-ended; 0 V to 1.6 V, differential
High level	0.5 V to 1.25 V, single-ended; 0 V to 2.5 V, differential
Resolution	10 mV
Accuracy	10% of setting
Width control	4 SCLK periods to segment length
Position control	0 to segment length in 4 points increments
Initial delay ³⁾	3.5 ns, typical
Variable delay control	Separate for each marker
Range	0 to 3 ns
Resolution	10 ps
Accuracy	±(10% of setting +20 ps)
Rise/fall time	1.0 ns, typical

³⁾ Output to marker

SYNC output

Characteristics	Description
Connector type	SMA
Type of output	Single ended
Source	Channel 1 or channel 2

SYNC output (continued)

Characteristics	Description
Waveform	Pulse (32 points width), WCOM (waveform duration pulse)
Impedance	50 Ω
Amplitude	1 V; doubles into high impedance, typical
Variable position control	
Range	0 to segment length
Resolution	32 points
Rise/fall time	2 ns, typical
Variable Width control	
Range	32 points to segment length
Resolution	32 points



Trigger input

Characteristics	Description
Connector type	SMA
Drive	Channel 1, channel 2, or both
Input impedance	10 kΩ
Polarity	Positive, negative, or both, selectable
Damage level	± 20 Vdc
Frequency range	0 to 15 MHz
Trigger level control	
Range	-5 V to 5 V
Resolution	12 bit (2.5 mV)
Accuracy	± (5% of setting + 2.5 mV)
Sensitivity	0.2 Vp-p
Pulse width, minimum	10 ns
System delay ⁴⁾	200 sample clock periods + 50 ns, typical
Trigger delay	Separate for each channel
Range	0 to 8,000,000 sample clock periods
Resolution	8 points
Accuracy	Same as sample clock accuracy
Smart Trigger	Detects a unique pulse width range
Conditioned trigger	<pulse width, >pulse width <>pulse width
Pulse width range	50 ns to 2 second
Resolution	2 ns
Accuracy	±(5% of setting +20 ns)
Trigger Holdoff	Ignores triggers for a holdoff duration
Holdoff range	100 ns to 2 second
Resolution	2 ns
Accuracy	±(5% of setting +20 ns)
Trigger jitter	8 sampling periods

⁴⁾ Trigger to Output

Internal Trigger Generator

Characteristics	Description
Source	Common or separate for each channel
Mode	Timer (waveform start to waveform start); Delayed (waveform stop to waveform start)
Timer	
Range	100 ns to 2 s
Resolution	3 digits
Accuracy	100 ppm
Delay	
Range	152 to 8,000,000 sample clock periods
Resolution	Even numbers, divisible by 8



Event input

Characteristics	Description
General	Used for branching in or out from a sequence loop. Also used for enabling or disabling the output in armed mode.
Connector type	Rear panel BNC
Input impedance	10 k Ω
Polarity	Positive, negative or either, selectable
Damage level	\pm 20 Vdc
Frequency range	0 to 15 MHz
Trigger level control	
Range	-5 V to 5 V
Resolution	12 bit (2.5 mV)
Accuracy	\pm (5% of setting + 2.5 mV)
Sensitivity	0.2 Vp-p minimum
Pulse width, minimum	10 ns

Sequence / Segment Control input

Characteristics	Description
Connector type	D-sub, 8 bit lines
Number of input connectors	1ch instrument: One 8 bit bus + valid line 2ch instrument: Two 8 bit buses to independently control each channel + valid line
Input impedance	10 k Ω
Input level	TTL

External reference clock input

Characteristics	Description
Connector type	Rear panel BNC
Input frequency	10 MHz to 100 MHz, programmable
Input impedance	50 Ω
Input voltage swing	-5dBm to 5dBm
Damage Level	10dBm

External sample clock input

Characteristics	Description
General	External signal is fed to a frequency splitter. Same frequency is applied to both channel
Connector type	Rear panel SMA
Input impedance	50 Ω
Input voltage swing	0dBm to 10dBm
Input frequency range	2.0 GHz to 4.2 GHz
Clock divider	1/1, 1/2, 1/4, ... 1/256, separate for each channel
Damage Level	15dBm



Two Instruments Synchronization

Characteristics	Description
General	
Initial Skew	
Offset Control	
Clock Source	Master sample clock generator
Trigger Source	Master trigger input

Mechanical, Environmental and Maintenance Specifications

Display

Characteristics	Description
Type	TFT LCD, back-lit
Size	4 "
Resolution	320 x 240 pixels

Peripheral devices

Characteristics	Description
USB 2.0 port	1 x front, USB host, standard A; 1 x rear, USB device, standard B
LAN port	1000/100/10 BASE-T
GPIB port	IEEE 488.2 standard interface, 24 pin
Segment control port	2 x D-sub, 9 pin

Power supply

Characteristics	Description
Source voltage and frequency	
Rating range	100 VAC to 240 VAC
Frequency range	50 Hz to 60 Hz
Power consumption	100 VA

Mechanical

Characteristics	Description
Dimensions	
With feet	315 x 102 x 395 mm (W x H x D)
Without feet	315 x 88 x 395 mm (W x H x D)
Weight	
Without package	4.5 kg
Shipping weight	6 kg

Environmental

Characteristics	Description
Operating temperature	0°C to 40°C
Storage temperature	-40°C to 70°C
Humidity	85% RH, non condensing

Certifications and compliances

Characteristics	Description
Safety	IEC61010-1
EMC	IEC 61326-1:2006

Maintenance

Characteristics	Description
General	Periodical recalibration is required to maintain accuracy of output characteristics
Recalibration Period	2 years

Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.

Agilent Channel Partners

www.agilent.com/find/channelpartners

Get the best of both worlds: Agilent's measurement expertise and product breadth, combined with channel partner convenience.

Remove all doubt

Our repair and calibration services will get your equipment back to you, performing like new, when promised. You will get full value out of your Agilent equipment throughout its lifetime. Your equipment will be serviced by Agilent-trained technicians using the latest factory calibration procedures, automated repair diagnostics and genuine parts. You will always have the utmost confidence in your measurements. For information regarding self maintenance of this product, please contact your Agilent office.

Agilent offers a wide range of additional expert test and measurement services for your equipment, including initial start-up assistance, onsite education and training, as well as design, system integration, and project management. For more information on repair and calibration services, go to:

www.agilent.com/find/removealldoubt

Product specifications and descriptions in this document subject to change without notice.

www.agilent.com
www.agilent.com/find/81180

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at: www.agilent.com/find/contactus

Americas

Canada (877) 894 4414
 Latin America 305 269 7500
 United States (800) 829 4444

Asia Pacific

Australia 1 800 629 485
 China 800 810 0189
 Hong Kong 800 938 693
 India 1 800 112 929
 Japan 0120 (421) 345
 Korea 080 769 0800
 Malaysia 1 800 888 848
 Singapore 1 800 375 8100
 Taiwan 0800 047 866
 Thailand 1 800 226 008

Europe & Middle East

Austria 43 (0) 1 360 277 1571
 Belgium 32 (0) 2 404 93 40
 Denmark 45 70 13 15 15
 Finland 358 (0) 10 855 2100
 France 0825 010 700*
*0.125 €/minute
 Germany 49 (0) 7031 464 6333
 Ireland 1890 924 204
 Israel 972-3-9288-504/544
 Italy 39 02 92 60 8484
 Netherlands 31 (0) 20 547 2111
 Spain 34 (91) 631 3300
 Sweden 0200-88 22 55
 Switzerland 0800 80 53 53
 United Kingdom 44 (0) 118 9276201
 Other European Countries:
www.agilent.com/find/contactus

Agilent Technologies, Inc. 2010
 Printed in USA, April 7, 2010
 5990-5697EN