


# Power Meters & Power Sensors

ML2430A CW Power Meter

ML2480B Wideband Power Meter

ML2490A Pulse Power Meter

MA2400A/D & MA24000A Power Sensors

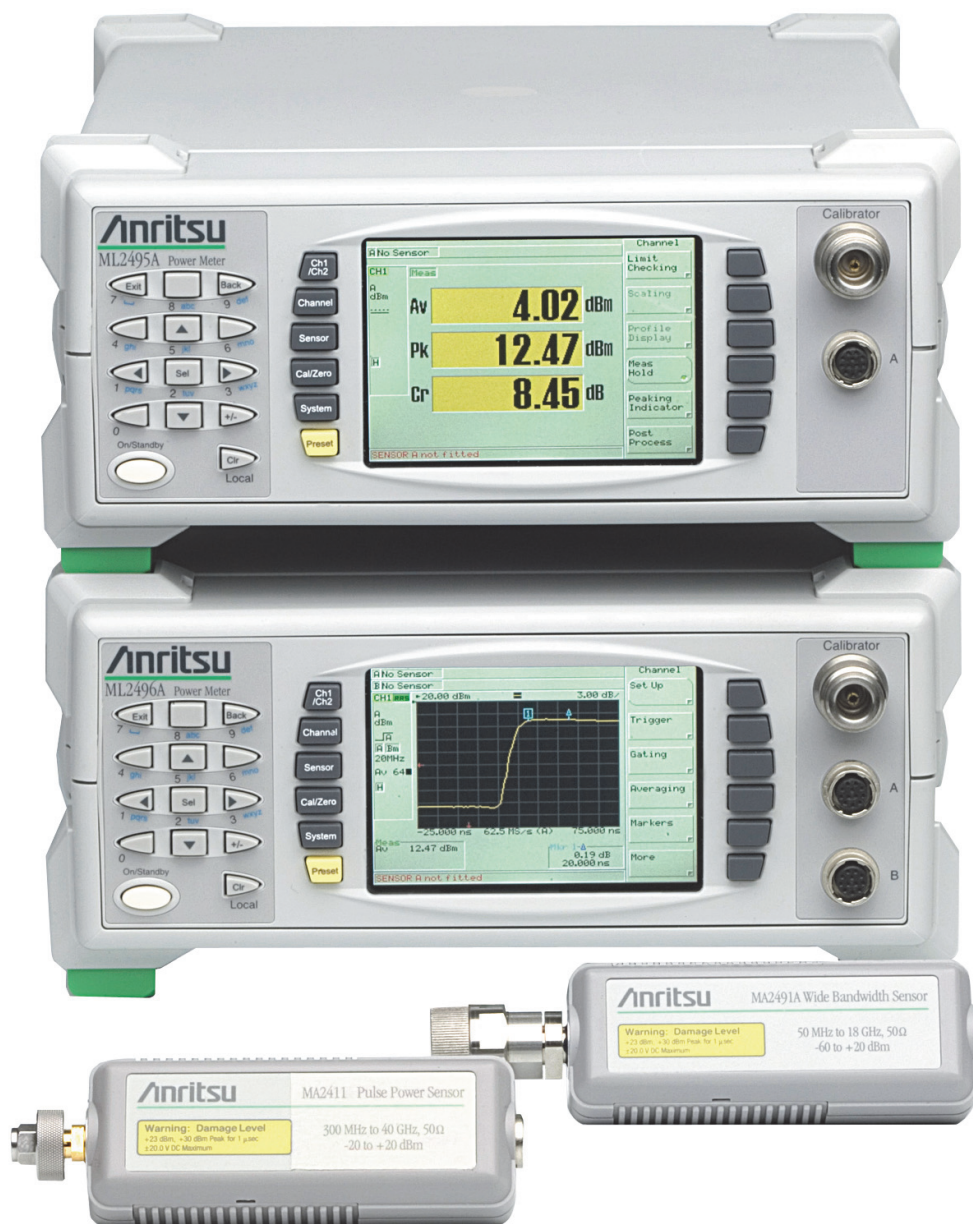

Anritsu Power Meters and Power Sensors: Accurate, Fast, and Affordable.

---

**Introduction**

Anritsu offers the world's most comprehensive range of power meters. The ML2490A series has the performance required for narrow, fast rising-edge pulse power measurements (for example, radar), while the ML2480B series is suited for wideband power measurements on signals such as W-CDMA, WiMAX, LTE, and WLAN. The ML2430A series of power meters are designed for CW applications, offering a combination of accuracy, speed and flexibility in a low cost package.

Also available are seven different families of power sensors with frequency coverage up to 50 GHz and dynamic range up to 90 dB. Most Anritsu power sensors can work in either pulsed/modulated or CW mode (the ML2480B/90A series meters offer both modes). In choosing a power sensor, several factors must be considered, including: frequency range, dynamic range, and the modulation type. The rise time of the sensor should also be chosen to match the rise time of the modulation.

---

**PowerMax™**

PowerMax™ is a free graphical user-interface software for the ML2480B and ML2490A Power Meter Series.

PowerMax provides an enhanced visualization of instrument display and simplified remote control of the instrument, allowing:

- Continuous view of measurement traces in real-time
- Multiple gates and markers readings displayed at a glance
- Archiving or printing of data and plots for future analysis

**PowerMax Requirements:****Hardware**

- PC Processor: 1.5 GHz
- Ethernet Interface: 10/100BaseT LAN
- Memory: 1 GB RAM or greater
- Monitor: 1024 x 768 or greater resolution

**Software**

- Operating System: Windows XP, Service Pack 2 or higher
- Browser: Microsoft Internet Explorer 5.1 or higher

---

**PowerSuite**

PowerSuite is free software available for the ML2430A series power meters. This software is used to continuously view measurement traces on the PC in real-time or to archive data and plots for future analysis. PowerSuite runs on a standard PC running Windows® 95 or higher, via GPIB or RS232.

---

The specifications in the following pages describe the warranted performance of the instruments for 25 ± 10 °C.

"Typical" specifications describe expected, but not warranted, performance based on sample testing. They do not guarantee the performance of any individual product. "Typical" specifications do not account for measurement uncertainty.

**Power Meter Performance**

	ML2430A Series	ML2480B Series	ML2490A Series
Number of Input Signals	1 (ML2437A) 2 (ML2438A)	1 (ML2487B) 2 (ML2488B)	1 (ML2495A) 2 (ML2496A)
Frequency Range	100 kHz to 65 GHz (sensor dependent)		
Dynamic Range Continuous or Peak	-70 to +20 dBm (dependent on sensor, external coupler or attenuator)		
Nominal Video BW	100 kHz (Profile mode)	Pulse/Modulated mode 20 MHz with MA2491A sensor CW mode 17 kHz ranges 1 through 4 35 Hz range 5	Pulse/Modulated mode > 65 MHz range 7 > 38 MHz range 8 > 16 MHz range 9 (Repetitive Sampling) 20 MHz (One shot) Combined B/W (with MA2411B sensor) > 39 MHz range 7 > 29 MHz range 8 > 12 MHz range 9 MA2411B nominal Bandwidth = 50 MHz CW mode 17 kHz ranges 1 through 4 36 Hz range 5
Sampling rate	31.25 kS/s	Auto/Manual CW Mode 75 kS/s Pulse/Modulated Mode 31.25 kS/s to 62.5 MS/s (dependent on trigger capture time) Conflicts between selected settings and other instrument settings are indicated through user warnings. (displayed and GPIB)	Auto/Manual CW Mode 75 kS/s Pulse/Modulated Mode 31.25 kS/s to 62.5 MS/s Continuous Sampling (Trigger capture time: 3.2 μs to 7 s, 200 data points) 1 GS/s Random Repetitive Sampling (Trigger capture time: 50 ns to 3.2 μs, 200 data points) Conflicts between selected settings and other instrument settings are indicated through user warnings. (displayed and GPIB)
System rise-time (10 % to 90 % at +10 dBm)	N/A	< 18 ns (with MA2411B sensor)	Typical 8 ns, Maximum 12 ns (with MA2411B sensor) Fall-time typically 11 ns
Rise-time measurement dynamic range	N/A	10 % to 90 % Rise-time measurement of -20 dBm to +20 dBm Peak power (with MA2491A)	
Overshoot (Pulse/Modulated mode)	N/A	≤ 3 % in linear power at +10 dBm	

**Accuracy**

(Defined by uncertainty calculations with relevant sensor and source match conditions)

	ML2430A Series	ML2480B Series	ML2490A Series
Instrumentation Accuracy	< 0.5 %	CW Mode: < 0.5 % (± 0.02 dB absolute Accuracy, ± 0.04 dB relative Accuracy) Pulse/Modulated Mode: < 0.8 % Nominal range 7, 8	
Equivalent Noise Power (512 Moving Average) <sup>a</sup>		MA2472D	MA2491A
	Range 1	0.5 μW	2 μW
	Range 2	50 nW	100 nW
	Range 3	0.8 nW	2 nW
	Range 4	0.2 nW	1 nW
	Range 5 (CW Mode)	50 pW	0.5 nW
	Range 7	5 μW	15 μW
	Range 8	1 μW	5 μW
	Range 9 (Pulse Mode)	0.5 μW	2 μW
			MA24002A
			N/A
			0.5 nW
			8 μW
			2 μW
			0.5 nW
			N/A
			N/A
			N/A

a. Equivalent Noise Power is RSS of Zero Set, Zero Drift and noise. Zero Set and Drift are measured over one hour after a one hour warm-up at constant ambient temperature. Noise is measured over five minutes over 512 averaging after one hour warm up at constant ambient temperature.

Power Meter Specifications

ML2430A, ML2480B, ML2490A

Operation	ML2430A Series	ML2480B Series	ML2490A Series
Measurement Display Readout (Numerical)	2	2 (CW or Pulse/Modulated measurement modes)	
Measurement Display Profile (Graph)	Power vs. Time graphic of readout data or Profile of Peak power for analysis of repetitive pulse or transient waveforms	2 (Pulse/Modulated measurement mode)	
Source sweep	Single channel power sweep or frequency sweep		
Peaking meter	± 5 dB range CW (Readout mode) only		
Amplifier Range	Dynamic range covered by five overlapping amplifier ranges: R1, R2, R3, R4, and R5. Universal Sensor MA2481/82D ranges 1 to 6.	Pulse modulated mode: Dynamic range covered by three overlapping amplifier ranges: R7, R8, and R9. CW mode: Dynamic range covered by five overlapping amplifier ranges: R1, R2, R3, R4, and R5. Universal Sensor MA2481/82D ranges 1 through 6	
Range Hold	Auto or Manual (current range or selectable 1 through 5).	Automatic or manual. When in manual, clear indication is given to user (display and GPIB) of fault conditions (under or over range).	

Features	(summary)		
	ML2430A Series	ML2480B Series	ML2490A Series
Display	Monochrome LCD, with backlight and adjust- able contrast	Color LCD	
Display resolution in Readout mode	0.1 dB to 0.001 dB Linear power units, 3 to 6 digits, 1 to 3 digits selectable to right of decimal, nW to W Voltage, 1 to 2 digits selectable to right of decimal	0.1 dB to 0.001 dB	
Display resolution in Profile mode	0.01 dB		
Time measurement resolution	Profile and P vs. T modes: 200 pixels display resolution For a 1 ms Profile window, cursor resolution on the display is 5 µs	16 ns Pulse/Modulated mode 15 µs CW Mode	1 ns (RRS mode) 16 ns (non RRS mode) Pulse/Modulated mode 15 µs CW Mode
Measurement hold	Hold, Max, Min		
Measurements	Average, Min, Max	Average, Min, Max, Peak, Crest, PAE (Power Added Efficiency)	
Power statistics	—	PDF, CDF, CCDF	
Voltage measurement range	0.00 to 20.00 V nominal		
Display units (Lin) Display units (Log)	Watt, %, VoltsdBm, dB, dBµV, dBmV, dBr	dBm, dBW, dB, dBµV, dBmV	
Display range	-199.99 dB to +199.99 dB		
Measurement Gates	1	Four Independently set Gates or eight repeated Gates One Fence per Measurement gate Gate measurement supports Average, Peak, Crest, Max and Min	
Markers	2	Four Markers and One Delta Marker, Marker to Max/Min, Pulse Rise/Fall-time, Pulse Width, Off Period, Pulse Repetition Interval Rise Fall/Search Parameter Variable % Reference: Max Marker or Gate Power Level	
Limit lines	Fixed value high and low limits with audible, rear panel TTL output, and/or visible Pass/Fail alarm indication Failure indication can latch for transient failure detection	Simple pass/fail for CW Complex limits for pulsed and TDMA systems 30 Limits Stores available on the instrument	
Offset range	-199.99 dB to +199.99 dB (Fixed value or frequency dependent table)		

ML2430A, ML2480B, ML2490A

Power Meter Specifications

Averaging			
	ML2430A Series	ML2480B Series	ML2490A Series
Type	Auto (Moving), Manual (Moving, Repeat)		
Range	1 to 512		
Low-level Averaging	Low, Medium and High settings apply post average low pass filter to improve visibility at high display resolution.	N/A	
Triggering			
	ML2430A Series	ML2480B Series	ML2490A Series
Source	Internal, External (TTL or RF Blanking), GPIB, Manual, or Continuous.	Continuous (not in Random Repetitive Sampling mode) Internal, External TTL (Rising or falling Edge), GPIB, or external Bus.	
Trigger Modes	Manual Single power value set to cover entire measurement dynamic range of sensor. Auto Automatically sets trigger level for signal over measurement dynamic range.		
Nominal Internal Trigger Bandwidth	N/A	Variable-auto set and manual 20 MHz, 2 MHz, 200 kHz, 20 kHz	
Arming Sources	Sets the trigger arming, unless the trigger source is set to EXTTTL When ARMING is set to Blanking ON, only samples taken when the rear panel Digital Input BNC is active will be averaged in the measurement.	Repetitive Sampling Modes: Automatic Frame for QAM and multi-pulse Continuous Sampling Modes: Single Automatic Frame for QAM and multi-pulse	
Frame Arming Time Range	N/A	0 to 64 x trigger capture time range or 120 s, whichever is greater.	
Internal Trigger Dynamic Range	-15 dBm to +20 dBm (all diode sensors, selectable to -25 dBm)	-28 dBm to +10 dBm with MA2472D CW mode -18 dBm to +14 dBm with MA2491A -30 dBm to +10 dBm with MA2472D Pulse/Modulated mode	
Internal Trigger Level Accuracy (typical)	1 dB		
Internal Trigger Settable Resolution	0.1 dB		
Trigger Time Resolution Uncertainty	N/A	$\pm 2$ ns or display resolution, whichever is larger. (Trigger Capture time 50 ns to 3.2 $\mu$ s) $\pm 16$ ns or display resolution whichever is larger. (Trigger Capture time 3.2 $\mu$ s to 7 s)	
Trigger Delay Range	0 ms to 999 ms	Pulse modulated mode: Pretrigger (-ve): 95 % of the Trigger Capture range Post Trigger: Set by 256K buffer and sample rate CW mode: Post Trigger Only: 0 ms to 999 ms depending on Trigger Capture period setting.	
External Trigger Range	TTL rising or falling edge (BNC input)		
Pre-trigger Range	N/A	90 % of trigger capture range	
Trigger Delay Settable Resolution	0.5 % of display period or 100 ns	200 display points 1 ns or 0.5 % of trigger capture time, whichever is larger. 400 display points 1 ns or 0.25 % of trigger capture time (400 points), whichever is larger.	
Trigger Delay Uncertainty	N/A	$\pm 2$ ns for pre and post trigger (Trigger capture time of 3.2 $\mu$ s or 50 ns)	
Trigger Latency	N/A	$\pm 15$ ns (20 MHz trigger BW)	
Trigger/Display Capture Range	Profile mode: 10 ms to 7 s P v T mode: 1 m to 24 hrs	3.2 $\mu$ s to 7 s	50 ns to 7 s
Trigger Capture Time Settable Resolution	N/A	200 display points 16 ns or 0.5 % of trigger capture time, whichever is larger 400 display points 16 ns or 0.25 % of trigger capture time, whichever is larger.	200 display points 1 ns or 0.5 % of trigger capture time, whichever is larger 400 display points 1 ns or 0.25 % of trigger capture time, whichever is larger.
Trigger Point Display (on-screen)	On-screen indicator/message	Trigger point depicted by trigger edge waveform (edge represents trigger point of signal). Display position of trigger edge waveform adjustable.	

Power Meter Specifications

ML2430A, ML2480B, ML2490A

System Configuration			
	ML2430A Series	ML2480B Series	ML2490A Series
Save/Recall	10 storage registers plus RESET default settings	20 settings stores Preset accessible on Front Panel Offset tables	
Secure Mode	Wipes non-volatile memory on power up when active.		

Interfaces			
	ML2430A Series	ML2480B Series	ML2490A Series
Remote Monitoring	Yes	No	
Modem Compatibility	Yes	No	
GPIB (IEEE-488.2, IEC-625)	> 600 readings/second (per input channel) Emulation of Anritsu ML4803, Agilent 436, 437, and 438	> 400 Readings/second CW Mode [TR3 Mode] > 350 Readings/second Pulse/Modulated Mode (Continuous Sampling) [1 µs Pulse, Readout Mode, Display Turned Off, TR3 Mode] > 10 Profile Transfers/sec Pulse/Modulated Mode (Profile Data) [200 Points per Sweep, Binary Float Output, 5 µs Trigger Capture Time] > 20 Readings/sec Pulse/Modulated Mode (Repetitive Sampling) [50 ns Pulse, Readout Mode, Display Turned Off, TR3 Mode] Back compatible with ML2480B with additional functionality added.	
External Video Output	N/A	1/4 VGA	
Parallel Printer Port	Compatible with Deskjet 540 and 340 Models (other 500 Series and 300 Series and later are typically compatible). Canon BJC 80.	N/A	
Ethernet (10/100 BaseT LAN)	N/A	Allows remote control, direct from a PC or Local/Wide-area network, using Dynamic (Auto) or Static IP assignment.	
RS232	Supports software download, instrument control, and modem dial-out. 1200, 2400, 4800, 9600, 19200, 38400, 57600 Baud rates are supported.	Supports software download and Instrument control 1200, 2400, 4800, 9600, 19200, 38400, 57600 Baud rates are supported.	
Cal Factor Voltage Input (BNC)	Operating Modes: Display voltage reading on selected channel Voltage proportional to frequency for sensor calibration factor compensation Blanking Input -TTL levels only Selectable positive or negative polarity Input Range: 0 V to 20 V Resolution: 0.5 mV Control: Adjustable voltage to frequency relationship	Can be configured for Cal factor correction from synthesiser and Ext Voltage Voltmeter. Connection: current probe for PAE applications	
External Trigger (BNC)	TTL, maximum frequency of 800 kHz	TTL, maximum frequency of 10 MHz	
Analogue Output (BNC)	Two outputs configurable to Log or Lin Operating Modes: Selectable channel adjusted for calibration factors and other power reading correction settings Pass/Fail: Selectable TTL High or Low Channel output: Near real time analog Uncalibrated AC Modulation Output: Output 1 only Dwell Output: Output 2 only Output Range: -5.0 V to +5.0 V Resolution: 0.1 mV	Output 1 can be configured for: Analog Output Pass/Fail TTL o/p Limits Leveling: Sensor Input A Output 2 can be configured for: Analog Output Pass/Fail TTL o/p Limits Leveling: Sensor Input B Trigger Output	

**ML2430A, ML2480B, ML2490A**

**Power Meter Specifications**

<b>Reference Calibrator</b>			
	<b>ML2430A Series</b>	<b>ML2480B Series</b>	<b>ML2490A Series</b>
Reference Calibrator Power	1 mW		
Power Accuracy (Traceable to National Standards)	± 1.2 % per year		
Frequency	50 MHz (nominal)	50 MHz (standard) 1 GHz (optional)	50 MHz and 1 GHz (both standard)
Frequency Accuracy	< 1 %	< 1 % (50 MHz) < 2 % (1 GHz)	
VSWR	< 1.04	< 1.12 (50 MHz) < 1.2 (1 GHz)	
Connector Type	N female		
<b>General Specifications</b>			
	<b>ML2430A Series</b>	<b>ML2480B Series</b>	<b>ML2490A Series</b>
General	MIL-T28800F, class 3		
Non Volatile RAM Battery	Lithium (10 year life)	Lithium (5 year life)	
Battery Option	> 6 hr usable with 3000 mAHr (NiMH) battery	N/A	
DC Power Requirements	12 to 24 VDC, Reverse protected to -40 V Maximum input 30 V	N/A	
AC Power Requirements	85 VAC to 264 VAC 47 Hz to 440 Hz 40 VA Maximum	85 VAC to 264 VAC 47 Hz to 440 Hz	
Operating Temperature	0 °C to 50 °C		
Storage Temperature	-40 °C to 70 °C		
Moisture	Splash and rain resistant, 95 % humidity non-condensing		
Dimensions	223 mm x 150 mm x 390 mm		
Weight	3 kg (excluding battery option)	3 kg	
Warranty	Power meters have a standard 3 year warranty. Power sensors have a standard 1 year warranty.		

Power Sensor Specifications

ML2430A, ML2480B, ML2490A

Power Sensor Performance

Sensor	Frequency Range	CW Dynamic Range (dBm)	SWR	Rise Time <sup>1</sup> (ms)	Sensor Linearity <sup>7</sup>	RF Connector <sup>2</sup>
<b>Standard Diode Sensors</b>						
MA2472D	10 MHz to 18 GHz	-70 to +20 CW mode -43 to +20 (ML243xA, Profile mode) -37 to +20 (ML2480A/B or ML2490A, Pulse/Mod mode)	< 1.17; 10 MHz to 50 MHz <sup>8</sup> < 1.90; 10 MHz to 50 MHz < 1.17; 50 MHz to 150 MHz < 1.12; 150 MHz to 2 GHz < 1.22; 2 GHz to 12.4 GHz < 1.25; 12.4 GHz to 18 GHz	< 0.004	< 1.8 %, ≤18 GHz < 2.5 %, ≤40 GHz < 3.5 %, ≤50 GHz (see Note 4)	N(m)
MA2473D	10 MHz to 32 GHz		K(m)			
MA2474D	10 MHz to 40 GHz		K(m)			
MA2475D	10 MHz to 50 GHz		V(m)			

Temperature accuracy: < 1 % < 40 GHz, < 1.5 % < 50 GHz, 5 °C to 50 °C

High Accuracy Diode Sensors

MA2442D	10 MHz to 18 GHz	-67 to +20 CW mode -40 to +20 (ML243xA, Profile mode) -34 to +20 (ML2480A/B or ML2490A, Pulse/Mod mode)	< 1.17; 10 MHz to 150 MHz < 1.08; 150 MHz to 2 GHz < 1.16; 2 GHz to 12.4 GHz < 1.21; 12.4 GHz to 18 GHz	< 0.004	< 1.8 %, ≤18 GHz < 2.5 %, ≤40 GHz < 3.5 %, ≤50 GHz for MA2445D (see Note 5)	N(m)
MA2444D	10 MHz to 40 GHz		K(m)			
MA2445D	10 MHz to 50 GHz		V(m)			

Temperature accuracy: < 1 % < 40 GHz, < 1.5 % < 50 GHz, 5 °C to 50 °C

Universal Power Sensors

MA2481D	10 MHz to 6 GHz	-60 to +20	< 1.17; 10 MHz to 150 MHz < 1.12; 150 MHz to 2 GHz < 1.22; 2 GHz to 6GHz	< 0.004 with option 1 only	< 3 %, ≤6 GHz < 3 %, ≤18 GHz (1.8 % CW with option 1)	N(m)
MA2482D	10 MHz to 18 GHz		< 1.22; 6 GHz to 12.4 GHz < 1.25; 12.4 GHz to 18 GHz			

Option 01 Adds fast CW mode to Universal Power Sensors for high speed measurements of CW signal plus TDMA and pulse measurements.

Temperature accuracy: < 1 %, 15 °C to 35 °C

Wideband Sensors

MA2490A <sup>3</sup>	50 MHz to 8 GHz	CW Mode: -60 to +20 Pulse/Modulated Mode: -30 to +20 (with ML2480B/90A)	< 1.17; 50 MHz to 150 MHz < 1.12; 150 MHz to 2.5 GHz < 1.22; 2.5 GHz to 8 GHz	< 18 ns	< 7 % 50 MHz to 300 MHz < 3.5 % 300 MHz to 8 GHz	N(m)
MA2491A <sup>3</sup>	50 MHz to 18 GHz		< 1.22; 8 GHz to 12.4 GHz < 1.25; 12.4 GHz to 18 GHz			

Temperature accuracy: < 1 % 10 °C to 45 °C

Pulse Sensor

MA2411B	300 MHz to 40 GHz	-20 to +20 dBm	< 1.15; 300 MHz to 2.5 GHz < 1.35; 2.5 GHz to 26 GHz < 1.50; 26 GHz to 40 GHz	< 8 ns typical 12 ns maximum < 18 ns when used with ML2487B/M L2488B	< 4.5 % 300 MHz to 18 GHz < 7 % 18 GHz to 40 GHz	K(m)
---------	-------------------	----------------	---	--	---	------

Requires 1 GHz Calibrator (Option 15) to be fitted on the meter, if used with ML248xB.

Temperature accuracy: < 2 % 10 °C to 45 °C

Thermal Sensor

MA24002A	10 MHz to 18 GHz	-30 dBm to +20 dBm	< 1.90; 10 MHz to 50 MHz < 1.17; 50 MHz to 150 MHz < 1.10; 150 MHz to 2 GHz < 1.15; 2 GHz to 12.4 GHz < 1.20; 12.4 GHz to 18 GHz < 1.25; 18 GHz to 32 GHz < 1.30; 32 GHz to 40 GHz < 1.40; 40 GHz to 50 GHz	< 15	1.8 % < 18 GHz 2.0 % < 40 GHz 2.5 % < 50 GHz (see note 6)	N(m)
MA24004A	10 MHz to 40 GHz		K(m)			
MA24005A	10 MHz to 50 GHz		V(m)			

Temperature accuracy: < 1 % < 30 GHz < +10 dBm, < 1.5 % ≥30 GHz ≥ +10 dBm

- 0.0 dBm, room temperature with standard 1.5m sensor cable.
- Each MA2400A/D Series sensor incorporates precision RF connectors with hexagon coupling nut for attachment by industry standard torque wrench.
- MA2490/1A and MA2411B sensors must be used with ML2480B or ML2490A series power meters.
- MA2475D Linearity applicable from -70 to +15 dBm. Add 1 % for power levels > +15 dBm  
2000-1537-R supplied as standard with the power meter.

- MA2445D Linearity applicable from -67 to +15 dBm. Add 1 % for power levels > +15 dBm
- MA24005D Linearity applicable from -30 to +15 dBm. Add 1 % for power levels > +15 dBm
- Sensor linearity specifications are ± value. Pulse/modulated performance only specified with 1.5m sensor cable length option.
- MA2472D only.

Warranty: Power sensors have a standard 1 year warranty.



### Measurement Accuracy

Power measurement accuracy can be split into several parts. The table below shows how the measurement uncertainty is composed for several power sensors. The source is presumed to be a 16 GHz, 12.0 dBm signal with a source SWR of 1.5:1.

The uncertainties can be calculated as an RSS term as each parameter is independent. Alternatively they can be added together for a worst-case analysis.


	MA2440D	MA2491A	MA2470D
Instrumentation Accuracy	0.50 %	0.50 %	0.50 %
Sensor Linearity	1.80 %	3.50 %	1.80 %
Noise, 512 Avg.	0.00 %	0.00 %	0.00 %
Zero Set and Drift	0.00 %	0.00 %	0.00 %
Mismatch Uncertainty	3.84 %	4.49 %	4.49 %
Sensor Cal Factor Uncertainty	0.79 %	1.59 %	0.84 %
Reference Power Uncertainty	1.20 %	1.20 %	1.20 %
Reference to Sensor Mismatch Uncertainty	0.23 %	0.31 %	0.23 %
Temperature Linearity	1.00 %	1.00 %	1.00 %
RSS, Room Temp	4.51 %	6.06 %	5.09 %
Sum of Uncertainties, Room Temp	8.36 %	11.59 %	9.06 %
RSS	4.62 %	6.14 %	5.18 %
Sum of Uncertainties	9.36 %	12.59 %	10.06 %

The **Instrumentation accuracy** of 0.5 % is a very small component of the overall uncertainty budget and describes the linear voltage measurement accuracy of the power meter.

**Sensor linearity** describes the relative response over the dynamic range of the sensor, and is included when the sensor is measuring power levels relative to the 0 dBm calibrator reference level. Temperature linearity is included when operating the sensor at other than room temperature.

**Noise, Zero Set and Drift** are all measured on the lowest power range of the power sensor. Different types of power sensors have different noise characteristics. Noise can be reduced by averaging.

**Mismatch uncertainty** is typically the largest component of the uncertainty budget – caused by the different impedances of the device under test and the sensor. To help resolve this issue, the sensor has been designed to have a good return loss over a wide frequency range, typically achieving significantly better results than the specification. In many cases the major contributing factor is the match of the source under test.

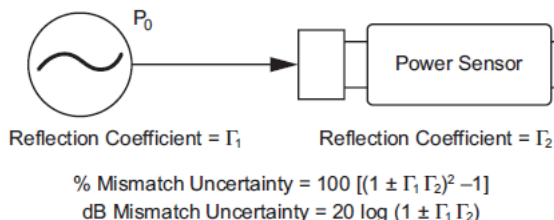


Mismatch is easily calculated in either dB or percentage terms from the source’s and sensor’s respective reflection coefficients.

The source match of the device under test can be improved by the use of precision attenuators with good return loss or by the use of external levelling with a high directivity coupler or splitter.

Connector damage has significant accuracy and repeat- ability effects, and is also the most common cause of sensor damage – although it is frequently undetected. Every MA2400A/D Series includes a hex nut connection for application of a calibrated torque wrench. Torque wrenches assure compliance with the quality requirement and result in more consistent measurements.

**Sensor calibration factor uncertainty** identifies the accuracy of the sensor’s calibration relative to a recognized standard for absolute power level. Sensor calibration factor uncertainty is included in accuracy calculations for any absolute power measurement (in dBm or Watts) and for relative power measurements if the signals are different frequencies.

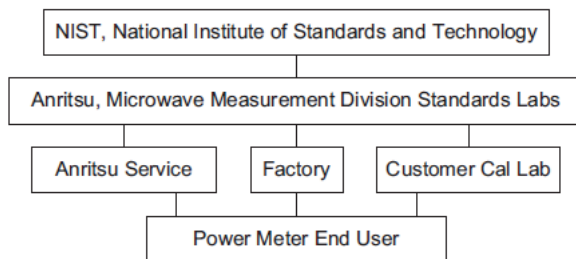

ML2400A Series is NIST traceable for more accurate, dependable measurements.

Reference power uncertainty specifies the maximum possible output drift of the power meter’s 50 MHz, 0.0 dBm power reference between calibration intervals. Reference power uncertainty and reference to sensor mismatch uncertainty do not generally impact relative power measurements. See the Anritsu website ([www.anritsu.com](http://www.anritsu.com)) for more information and tool to calculate measurement uncertainties.

Ordering Information

Power Meters & Sensors ML2430A, ML2480B, ML2490A

**Power Meters & Sensors Selection Guide** Choose the right power meter and power sensor for your measurement application.

Power Sensors	Standard Diode	(High Accuracy) Diode	Universal	Wideband	Pulse	Thermal
<b>Model Number</b>	MA2470D Series	MA2440D Series	MA2480D Series	MA249XA Series	MA2411B	MA2400xA
<b>Power Measurement</b>	Average (RMS)	Average (RMS)	Average (RMS)	Average (RMS), Peak	Average (RMS), Peak	Average (RMS)
<b>Measurement Application (Examples)</b>	CW, GMSK, GFSK, 8PSK	CW, GMSK	CW, GMSK, GFSK, 8PSK, QPSK, QAM	CW, GMSK, 8PSK, QPSK, QAM	Pulse, QAM	Any Modulation
	TDMA, FDMA, IS136	TDMA, FDMA	TDMA, FDMA, CDMA, OFDM, Radar	TDMA, FDMA, CDMA, OFDM, Radar	Radar, OFDM	Any Access Scheme
<b>Compatible Power Meters</b>	ML24xxA/B	ML24xxA/B	ML24xxA/B	ML2480A/B, ML2490A	ML2480A/B, ML2490A	ML24xxA/B

**Power Meter Models**

- ML2495A Pulse Power Meter, Single Input
- ML2496A Pulse Power Meter, Dual Input
- ML2487B Wideband Power Meter, Single Input
- ML2488B Wideband Power Meter, Dual Input
- ML2437A CW Power Meter, Single Input
- ML2438A CW Power Meter, Dual Input

**ML2490A Series**

- ML2400A-05 Front Bail Handle
- ML2490A-06 Rear Mount Input A on ML2495A
- ML2490A-07 Rear Input A and Reference on ML2495A
- ML2490A-08 Rear Mount Inputs A, B and Reference on ML2496A
- ML2490A-09 Rear Mount Inputs A, B on ML2496A
- ML2490A-98 Calibration to ISO 17025 and/or ANSI/NCSL Z540
- ML2490A-99 Premium Calibration
- 13000-00238 Hard Copy Operation Manual<sup>a</sup>
- 13000-00239 Hard Copy Programming Manual<sup>a</sup>
- 13000-00164 Hard Copy Maintenance Manual

**ML2480B Series**

- ML2480B-005 Front Bail Handle
- ML2480B-006 Rear Mount Input A on ML2487A
- ML2480B-007 Rear Input A and Reference on ML2487A
- ML2480B-008 Rear Mount Inputs A, B, and Reference on ML2488A
- ML2480B-009 Rear Mount Inputs A, B on ML2488A
- ML2480B-015 Factory Fitted 50 MHz and 1 GHz Calibrator (required by MA2411B Sensor)
- ML2480B-098 Calibration to ISO 17025 and/or ANSI/NCSL Z540
- ML2480B-099 Premium Calibration
- 13000-00238 Hard Copy Operation Manual<sup>a</sup>
- 13000-00239 Hard Copy Programming Manual<sup>a</sup>
- 13000-00164 Hard Copy Maintenance Manual

Options 5, 2400-82, and 2400-83 are mutually exclusive for any given ML2480B/90A.

Options 6, 7, 8 and 9 are mutually exclusive for any given ML2480B/90A.

a. English and Japanese soft copy manual included standard on product disc.

**ML2430A Series**

- ML2400A-05 Front Bail Handle
- ML2400A-06 Rear Mount Input A on ML2437A
- ML2400A-07 Rear Input A and Reference on ML2437A
- ML2400A-08 Rear Mount Inputs A, B and Reference on ML2438A
- ML2400A-09 Rear Mount Inputs A and B on ML2438A
- 2000-1603 NiMH Battery
- 2000-996-R Desktop Battery Charger with Power Supply
- 2000-1534-R Desktop Battery Charger (for use in Japan only)
- 2000-1538-R 3 m Sensor Cable
- 2000-1539-R 5 m Sensor Cable
- 2000-1540-R 10 m Sensor Cable
- 2000-1541-R 30 m Sensor Cable
- 2000-1542-R 50 m Sensor Cable
- 2000-1543-R 100 m Sensor Cable
- 2000-1545 Bulkhead Adapter
- 10585-00001 Hard Copy Operation and Programming Manual<sup>a</sup>
- 10585-00003 Hard Copy Maintenance Manual
- ML2400A-98 Calibration to ISO 17025 and/or ANSI/NCSL Z540
- ML2400A-99 Premium Calibration

Options 5, 2400-82, and 2400-83 are mutually exclusive for any given ML2430A.

Options 6, 7, 8 and 9 are mutually exclusive for any given ML2430A unit.

Pulse/modulated performance only specified with 1.5 m sensor cable length.

**Standard Accessories (all models)**

- 2300-283 Power Meters and Sensors Product Disc
- Documentation and Literature
- PowerMax (ML249xA and ML248xB only)
- PowerSuite (ML243xA only)
- PowerXpert (USB Power Sensors only)

Power Cord (for destination country)

1.5 m Sensor Cord (one per meter input)

Certificate of Calibration (also included with sensors)

**Power Sensor Models**

MA2472D	Standard diode sensor (10 MHz to 18 GHz, -70 dBm to 20 dBm)
MA2473D	Standard diode sensor (10 MHz to 32 GHz, -70 dBm to 20 dBm)
MA2474D	Standard diode sensor (10 MHz to 40 GHz, -70 dBm to 20 dBm)
MA2475D	Standard diode sensor (10 MHz to 50 GHz, -70 dBm to 20 dBm)
MA2442D	High accuracy diode sensor (10 MHz to 18 GHz, -67 dBm to 20 dBm)
MA2444D	High accuracy diode sensor (10 MHz to 40 GHz, -67 dBm to 20 dBm)
MA2445D	High accuracy diode sensor (10 MHz to 50 GHz, -67 dBm to 20 dBm)
MA2481D	Universal sensor (10 MHz to 6 GHz, -60 dBm to 20 dBm)
MA2482D	Universal sensor (10 MHz to 18 GHz, -60 dBm to 20 dBm)
MA2490A	Wideband sensor (50 MHz to 8 GHz, -60 dBm to 20 dBm)
MA2491A	Wideband sensor (50 MHz to 18 GHz, -60 dBm to 20 dBm)
MA2411B	Pulse Sensor (300 MHz to 40 GHz, -20 dBm to 20 dBm)
MA24002A	Thermal Sensor (10 MHz to 18 GHz, -30 dBm to 20 dBm)
MA24004A	Thermal Sensor (10 MHz to 40 GHz, -30 dBm to 20 dBm)
MA24005A	Thermal Sensor (10 MHz to 50 GHz, -30 dBm to 20 dBm)

**General Options and Accessories**

760-209	Hardside Transit Case
D41310	Soft Carry Case with Shoulder Strap
2000-1535	Front Panel Cover
2000-1536-R	0.3 m Sensor Cable
2000-1537-R	Spare 1.5 m Sensor Cable
2000-1544	RS-232 Bootload Cable
2400-82	Rack Mount, Single Unit
2400-83	Rack Mount, Side-by-Side

(Options 5, 2400-82, and 2400-83 are mutually exclusive)

See your Anritsu Representative or Components catalogue for available Attenuators, Limiters, Coaxial adapters, Waveguide-to-Coaxial Adapters, Splitters & Dividers, Loads, Bridges, Open/Shorts, and Calibrated Torque Wrenches.

Software upgrades, LabView drivers, and additional literature can be downloaded from the Anritsu web site at [www.anritsu.com](http://www.anritsu.com)

**Regulatory Compliance**

European Union	EMC 2014/30/EU, EN 61326:2013, CISPR 11/EN 55011, IEC/EN 61000-4-2/3/4/5/6/8/11 Low Voltage Directive 2014/35/EU Safety EN 61010-1:2010 RoHS Directive 2011/65/EU
Australia and New Zealand	RCM AS/NZS 4417:2012
South Korea	KCC-REM-A21-0004

## Training at Anritsu

Anritsu has designed courses to help you stay up to date with technologies important to your job. For available training courses visit:  
[www.anritsu.com/training](http://www.anritsu.com/training)

# Anritsu

- **United States**

**Anritsu Company**

1155 East Collins Blvd, Suite 100  
 Richardson, TX 75081, U.S.A.  
 Toll Free: 1-800-267-4878  
 Phone: +1-972-644-1777  
 Fax: +1-972-671-1877

- **Canada**

**Anritsu Electronics Ltd.**

700 Silver Seven Road, Suite 120  
 Kanata, Ontario K2V 1C3, Canada  
 Phone: +1-613-591-2003  
 Fax: +1-613-591-1006

- **Brazil**

**Anritsu Eletrônica Ltda.**

Praça Amadeu Amaral, 27 - 1 Andar  
 01327-010 Bela Vista, São Paulo, Brazil  
 Phone: +55-11-3283-2511  
 Fax: +55-11-3288-6940

- **Mexico**

**Anritsu Company, S.A. de C.V.**

Av. Ejército Nacional No. 579 Piso 9, Col. Granada  
 11520 México, D.F., México  
 Phone: +52-55-1101-2370  
 Fax: +52-55-5254-3147

- **United Kingdom**

**Anritsu EMEA Ltd.**

200 Capability Green  
 Luton, Bedfordshire LU1 3LU  
 United Kingdom  
 Phone: +44-1582-433280  
 Fax: +44-1582-731303

- **France**

**Anritsu S.A.**

12 Avenue du Québec  
 Bâtiment Iris 1-Silic 612  
 91140 Villebon-sur-Yvette, France  
 Phone: +33-1-60-92-15-50  
 Fax: +33-1-64-46-10-65

- **Germany**

**Anritsu GmbH**

Nemetschek Haus, Konrad-Zuse-Platz 1  
 81829 München, Germany  
 Phone: +49-89-442308-0  
 Fax: +49-89-442308-55

- **Italy**

**Anritsu S.r.l.**

Via Elio Vittorini 129  
 00144 Roma, Italy  
 Phone: +39-06-509-9711  
 Fax: +39-06-502-2425

- **Sweden**

**Anritsu AB**

Kistagången 20B  
 164 40 KISTA, Sweden  
 Phone: +46-8-534-707-00  
 Fax: +46-8-534-707-30

- **Finland**

**Anritsu AB**

Teknobulevardi 3-5  
 FI-01530 Vantaa, Finland  
 Phone: +358-20-741-8100  
 Fax: +358-20-741-8111

- **Denmark**

**Anritsu A/S**

Kay Fiskers Plads 9  
 2300 Copenhagen S, Denmark  
 Phone: +45-7211-2200  
 Fax: +45-7211-2210

- **Russia**

**Anritsu EMEA Ltd.**
**Representation Office in Russia**

Tverskaya str. 16/2, bld. 1, 7th floor  
 Moscow, 125009, Russia  
 Phone: +7-495-363-1694  
 Fax: +7-495-935-8962

- **Spain**

**Anritsu EMEA Ltd.**
**Representation Office in Spain**

Edificio Cuzco IV, Po. de la Castellana, 141, Pta. 8  
 28046, Madrid, Spain  
 Phone: +34-915-726-761  
 Fax: +34-915-726-621

- **United Arab Emirates**

**Anritsu EMEA Ltd.**
**Dubai Liaison Office**

P O Box 500413 - Dubai Internet City  
 Al Thuraya Building, Tower 1, Suite 701, 7th Floor  
 Dubai, United Arab Emirates  
 Phone: +971-4-3670352  
 Fax: +971-4-3688460

- **India**

**Anritsu India Private Limited**

2nd & 3rd Floor, #837/1, Binnamangla 1st Stage  
 Indiranagar, 100ft Road, Bangalore - 560038, India  
 Phone: +91-80-4058-1300  
 Fax: +91-80-4058-1301

- **Singapore**

**Anritsu Pte. Ltd.**

11 Chang Charn Road, #04-01, Shriro House  
 Singapore 159640  
 Phone: +65-6282-2400  
 Fax: +65-6282-2533

- **P.R. China (Shanghai)**

**Anritsu (China) Co., Ltd.**

27th Floor, Tower A  
 New Caohejing International Business Center  
 No. 391 Gui Ping Road Shanghai, Xu Hui Di District  
 Shanghai 200233, P.R. China  
 Phone: +86-21-6237-0898  
 Fax: +86-21-6237-0899

- **P.R. China (Hong Kong)**

**Anritsu Company Ltd.**

Unit 1006-7, 10/F., Greenfield Tower  
 Concordia Plaza  
 No. 1 Science Museum Road, Tsim Sha Tsui East  
 Kowloon, Hong Kong, P. R. China  
 Phone: +852-2301-4980  
 Fax: +852-2301-3545

- **Japan**

**Anritsu Corporation**

8-5, Tamura-cho, Atsugi-shi  
 Kanagawa, 243-0016 Japan  
 Phone: +81-46-296-1221  
 Fax: +81-46-296-1238

- **Korea**

**Anritsu Corporation, Ltd.**

5FL, 235 Pangyoeyeok-ro, Bundang-gu  
 Seongnam-si  
 Gyeonggi-do, 463-400 Korea  
 Phone: +82-31-696-7750  
 Fax: +82-31-696-7751

- **Australia**

**Anritsu Pty Ltd.**

Unit 21/270 Ferntree Gully Road  
 Notting Hill, Victoria, 3168, Australia  
 Phone: +61-3-9558-8177  
 Fax: +61-3-9558-8255

- **Taiwan**

**Anritsu Company Inc.**

7F, No. 316, Sec. 1, Neihu Rd, Taipei 114, Taiwan  
 Phone: +886-2-8751-1816  
 Fax: +886-2-8751-1817

List Revision Date: 20150420



© Anritsu All trademarks are registered trademarks of their respective companies. Data subject to change without notice. For the most recent specifications visit: [www.anritsu.com](http://www.anritsu.com)  
 Anritsu utilizes recycled paper and environmentally conscious inks and toner.

ML2430A, ML2480B, ML2490A TDS  
 Copyright October 2017 Anritsu Company, USA  
 All Rights Reserved



11410-00423



K