

FTBx-750C Metro/Long-Haul OTDR

LONG-DISTANCE FIBER CHARACTERIZATION AND FIBER UPGRADES



iOLM
READY

40G

EXFO Connect
Compatible



NEW OTDR
GENERATION

High dynamic range combined with high resolution for highly accurate fiber characterization.

SPEC SHEET

KEY FEATURES

Dynamic range of up to 46 dB

Event dead zone of 0.5 m and attenuation dead zone of 2.5 m

Up to 256 000 sampling points

EXFO Connect-compatible: automated asset management; data goes through the cloud and into a dynamic database

APPLICATIONS

Metro network testing

Long-haul network testing

COMPLEMENTARY PRODUCTS AND OPTIONS



Platform
FTB-2/FTB-2 Pro



Fiber Inspection Probe
FIP-400B (Wi-Fi or USB)



Data Post-Processing Software
FastReporter 2



LOADED WITH FEATURES TO BOOST YOUR EFFICIENCY



Real-Time Averaging

Activates the OTDR laser in continuous shooting mode, the trace refreshes in real time and allows to monitor the fiber for a sudden change. Perfect for a quick overview of the fiber under test.



Automode

Used as a discovery mode, this feature automatically adjusts the distance range and the pulse width in function of the link under test. It is recommended to adjust the parameters to perform additional measurements to locate other events.



Zoom Tools

Zoom and center to facilitate the analysis of your fibers. Draw a window around the area of interest and center in the screen quicker.



Set Parameters On The Fly

Dynamically change OTDR settings for the ongoing acquisition without stopping or returning to submenus.



Macrobend Finder

This built-in feature enables the unit to automatically locate and identify macrobends, no need to spend further time analyzing the traces.



Bidirectional Analysis (Via FastReporter 2 Data Post-Processing Software)

Recommended to ensure true splice characterization, bidirectional analysis combines results from both directions to provide an average loss for each event. For a more complete event characterization, use iOLM and benefit from maximum resolution on both directions (multiple pulse widths at multiple wavelengths) as well as a consolidated view.


LOOKING FOR ICON-BASED MAPPING?

Linear View (Included on All EXFO OTDRs)

Available on our OTDRs since 2006, the linear view simplifies the reading of an OTDR trace by displaying icons in a linear way for each wavelength. This view converts the graph data points obtained from a traditional single pulse trace into reflective or non-reflective icons. With applied pass/fail thresholds, it becomes easier to pinpoint faults on your link.

This improved version of linear view provides the flexibility to display both the OTDR graph and its linear view without having to toggle to analyze your fiber link.

Although this linear view simplifies the OTDR reading of a single pulse width's trace, the user will still need to set the OTDR parameters. In addition, multiple traces must often be performed in order to fully characterize the fiber links. See the section below to learn how the iOLM can perform this automatically and with more accurate results.

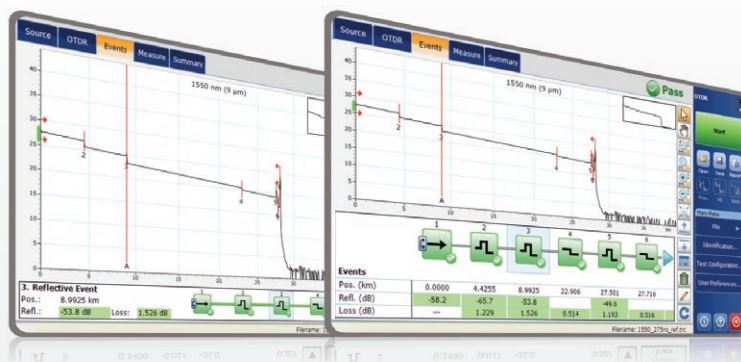

iOLM—REMOVING THE COMPLEXITY FROM OTDR TESTING

OTDR TESTING COMES WITH ITS LOAD OF CHALLENGES...



WRONG OTDR TRACES



COUNTLESS TRACES TO ANALYZE



REPEATING THE SAME JOB TWICE



COMPLEX INSTRUMENT TRAINING/SUPPORT

iOLM | intelligent Optical Link Mapper

In response to these challenges, EXFO developed a better way to test fiber optics:

The iOLM is an OTDR-based application designed to simplify OTDR testing by eliminating the need to configure parameters, and/or analyze and interpret multiple complex OTDR traces. Its advanced algorithms dynamically define the testing parameters, as well as the number of acquisitions that best fit the network under test. By correlating multipulse widths on multiple wavelengths, the iOLM locates and identifies faults with maximum resolution—all at the push of a single button.

HOW DOES IT WORK?

Dynamic multipulse acquisition




Intelligent trace analysis



All results combined into a single link view



Comprehensive diagnosis



Turning traditional OTDR testing into clear, automated, first-time-right results for technicians of any skill level.

Patent protection applies to the intelligent Optical Link Mapper, including its proprietary measurement software. EXFO's Universal Interface is protected by US patent 6,612,750.

THREE WAYS TO BENEFIT FROM THE iOLM

COMBO



Run both iOLM and OTDR applications (Oi code)

UPGRADE



Add the iOLM software option to your iOLM-ready unit, even while in the field

iOLM ONLY



Order a unit with the iOLM application only

iOLM FEATURES VALUE PACK

In addition to the standard iOLM feature set, you can select added-value features as part of the **Advanced** or **Pro** packages. Please refer to the intelligent Optical Link Mapper (iOLM) specification sheet for the complete and most recent description of these value packs.

GET THE BEST OUT OF YOUR DATA POST-PROCESSING



ONE SOFTWARE DOES IT ALL

This powerful reporting software is the perfect complement to your OTDR, and can be used to create and customize reports to fully address your needs.



FIBER CONNECTOR INSPECTION AND CERTIFICATION—THE ESSENTIAL FIRST STEP BEFORE ANY OTDR TESTING



ConnectoMax2

Taking the time to properly inspect a fiber-optic connector using an EXFO fiber inspection probe can prevent a host of issues from arising further down the line, thus saving you time, money and trouble. Moreover, using a fully automated solution with autofocus capabilities will turn this critical inspection phase into a fast and hassle-free one-step process.

DID YOU KNOW THAT THE CONNECTOR OF YOUR OTDR/iOLM IS ALSO CRITICAL?

The presence of a dirty connector at an OTDR port or launch cable can negatively impact your test results, and even cause permanent damage during mating. Therefore, it is critical to regularly inspect these connectors to ensure that they are free of any contamination. Making inspection the first step of your OTDR best practices will maximize the performances of your OTDR and your efficiency.

FIVE MODELS TO FIT YOUR BUDGET

| FEATURES | USB WIRED | | | WIRELESS | |
|--|-------------------|----------------------------|-----------------------------|----------------------------|-----------------------------|
| | Basic FIP-410B | Semi-Automated FIP-420B | Fully Automated FIP-430B | Semi-Automated FIP-425B | Fully Automated FIP-435B |
| Three magnification levels | ✓ | ✓ | ✓ | ✓ | ✓ |
| Image capture | ✓ | ✓ | ✓ | ✓ | ✓ |
| Five-megapixel CMOS capturing device | ✓ | ✓ | ✓ | ✓ | ✓ |
| Automatic fiber image-centering function | X | ✓ | ✓ | ✓ | ✓ |
| Automatic focus adjustment | X | X | ✓ | X | ✓ |
| Onboard pass/fail analysis | X | ✓ | ✓ | ✓ | ✓ |
| Pass/fail LED indicator | X | ✓ | ✓ | ✓ | ✓ |
| Wi-Fi connectivity | X | X | X | ✓ | ✓ |

For additional information, please refer to the FIP-400B USB or FIP-400B wireless specification sheets.

AVAILABLE IN THE FTB-2/FTB-2 PRO PLATFORM

The FTB-2, available in a standard or Pro model, is the most compact solution on the market for **multirate, multitechnology, multiservice testing**, delivering all the power of a high-end platform in a conveniently sized, go-anywhere field-testing tool.



**INTUITIVE
INTERFACE**

Widescreen display and single touch gesture support



**UNMATCHED
CONNECTIVITY**

Wi-Fi, Bluetooth, Gigabit Ethernet and multiple USB ports



**INCREASED
PRODUCTIVITY**

Store, push and share test data automatically

DO MORE BY GOING FTB PRO

The Windows 8.1 Pro operating system allows for a wide choice of third-party applications and supports an extensive range of USB devices.

- › Start faster and multitask
- › Use any office suite
- › Connect to printers, cameras, keyboards, mice, and more

Bring Your Own Apps



Share your desktop (e.g., using TeamViewer)



Antivirus software



Communicate via e-mail services and over-the-top (OTT) apps



Record and automate actions






Share files via cloud-based storage

Go FTB Pro!




SOFTWARE TEST TOOLS

This series of platform-based software testing tools enhance the value of the FTB-2/FTB-2 Pro platform, providing additional testing capabilities without the need for additional modules or units.

| Expert TEST TOOLS | |
|---|--|
|  | <p>Expert VoIP generates a voice-over-IP call directly from the test platform to validate performance during service turn-up and troubleshooting.</p> <ul style="list-style-type: none"> > Supports a wide range of signaling protocols, including SIP, SCCP, H.248/Megaco and H.323 > Supports MOS and R-factor quality metrics > Simplifies testing with configurable pass/fail thresholds and RTP metrics |
|  | <p>Expert IP integrates six commonly used datacom test tools into one platform-based application to ensure that field technicians are prepared for a wide range of testing needs.</p> <ul style="list-style-type: none"> > Rapidly performs debugging sequences with VLAN scan and LAN discovery > Validates end-to-end ping and traceroute > Verifies FTP performance and HTTP availability |
|  | <p>This powerful IPTV quality assessment solution enables set-top-box emulation and passive monitoring of IPTV streams, allowing quick and easy pass/fail verification of IPTV installations.</p> <ul style="list-style-type: none"> > Real-time video preview > Analyzes up to 10 video streams > Comprehensive QoS and QoE metrics including MOS score |

AUTOMATE ASSET MANAGEMENT. PUSH TEST DATA IN THE CLOUD. GET CONNECTED.

| | |
|--|---|
|  | <p>EXFO Connect pushes and stores test equipment and test-data content automatically in the cloud, allowing you to streamline test operation from build-out to maintenance.</p> |
|--|---|

All specifications valid at 23 °C ± 2 °C with an FC/APC connector, unless otherwise specified.

| TECHNICAL SPECIFICATIONS | |
|---|--|
| Wavelengths (nm) ^a | 1310 ± 20/1550 ± 20/1625 ± 10 |
| Dynamic range at 20 μs (dB) ^b | 1310/1550 model: dynamic range = 46/46 dB 1310/1550/1625 model: dynamic range = 45/45/45 dB |
| Event dead zone (m) ^c | 0.5 |
| Attenuation dead zone (m) ^d | 2.5 |
| Distance range (km) | 0.1 to 400 |
| Pulse width (ns) | 3 to 20 000 |
| Linearity (dB/dB) ^a | ±0.03 |
| Loss threshold (dB) | 0.01 |
| Loss resolution (dB) | 0.001 |
| Sampling resolution (m) | 0.04 to 10 |
| Sampling points | Up to 256 000 |
| Distance uncertainty (m) ^e | ±(0.75 + 0.0025 % x distance + sampling resolution) |
| Measurement time | User-defined (maximum: 60 minutes) |
| Typical real-time refresh (Hz) | 4 |
| Stable source output power (dBm) ^f | 1.5 |
| Reflectance (dB) ^a | ±2 |

| GENERAL SPECIFICATIONS | | |
|------------------------|--|---|
| Size (H x W x D) | 158 mm x 24 mm x 174 mm (6 1/4 in x 15/16 in x 6 7/8 in) | |
| Weight | 0.4 kg (0.9 lb) | |
| Temperature | Operating | Refer to platform's specification sheet -40 °C to 70 °C (-40 °F to 158 °F) |
| | Storage | |
| Relative humidity | 0% to 95% non-condensing | |




This picture is shown as a guideline only. Actual module may differ depending on the configuration selected.

Notes

- a. Typical.
- b. Typical dynamic range with a three-minute averaging at SNR = 1.
- c. Typical for reflectance from -35 dB to -55 dB, at 3-ns pulse.
- d. Typical at 1310 nm, for reflectance at -55 dB. Attenuation dead zone is 3.5 m typical at 1310 nm with reflectance below -45 dB.
- e. Does not include uncertainty due to fiber index.
- f. Typical output power value at 1550 nm.

LASER SAFETY



INVISIBLE LASER RADIATION
 VIEWING THE LASER OUTPUT WITH
 CERTAIN OPTICAL INSTRUMENTS (FOR
 EXAMPLE, EYE LOUPES, MAGNIFIERS AND
 MICROSCOPES) WITHIN A DISTANCE OF
 100 MM MAY POSE AN EYE HAZARD
 CLASS 1M LASER PRODUCT

ORDERING INFORMATION

FTBx-750C-XX-XX-XX-XX

Model

FTBx-750C = OTDR

Optical configuration

SM1 = SM OTDR module, 1310/1550 nm

SM3 = SM OTDR module, 1310/1550/1625 nm

Base software

OTDR = Enables OTDR application only

iOLM = Enables iOLM application only

Oi = Enables OTDR and iOLM applications

iOLM software option^a

00 = iOLM standard

iADV = iOLM advanced

iPRO = iOLM pro

iCERT = iOLM tier-2 certification

Singlemode connector

EA-EUI-28 = APC/DIN 47256

EA-EUI-89 = APC/FC narrow key

EA-EUI-91 = APC/SC

EA-EUI-95 = APC/E-2000

EA-EUI-98 = APC/LC

EI connectors = See section below about APC connectors

Example: FTBx-750C-SM1-OTDR-EA-EUI-89

Note

a. Please refer to the intelligent Optical Link Mapper (iOLM) specification sheet for the complete and most recent description of these value packs.

EI CONNECTORS



To maximize the performance of your OTDR, EXFO recommends using APC connectors on singlemode port. These connectors generate lower reflectance, which is a critical parameter that affects performance, particularly dead zones. APC connectors provide better performances than UPC connectors, thereby improving testing efficiency.

Note: UPC connectors are also available, simply replace EA-XX by EI-XX in the ordering part number. Additional connector available: EI-EUI-90 (UPC/ST).

EXFO Headquarters > Tel.: +1 418 683-0211 | Toll-free: +1 800 663-3936 (USA and Canada) | Fax: +1 418 683-2170 | info@EXFO.com | www.EXFO.com

EXFO serves over 2000 customers in more than 100 countries. To find your local office contact details, please go to www.EXFO.com/contact.

EXFO is certified ISO 9001 and attests to the quality of these products. EXFO has made every effort to ensure that the information contained in this specification sheet is accurate. However, we accept no responsibility for any errors or omissions, and we reserve the right to modify design, characteristics and products at any time without obligation. Units of measurement in this document conform to SI standards and practices. In addition, all of EXFO's manufactured products are compliant with the European Union's WEEE directive. For more information, please visit www.EXFO.com/recycle. Contact EXFO for prices and availability or to obtain the phone number of your local EXFO distributor.

For the most recent version of this spec sheet, please go to the EXFO website at www.EXFO.com/specs.

In case of discrepancy, the web version takes precedence over any printed literature.