

Cell Master™

Compact Handheld Base Station Analyzer

MT8212E

2 MHz to 4 GHz
100 kHz to 4 GHz
10 MHz to 4 GHz

MT8213E

2 MHz to 6 GHz
100 kHz to 6 GHz
10 MHz to 6 GHz

Cable & Antenna Analyzer
Spectrum Analyzer
Power Meter

Introduction

Anritsu introduces its latest generation compact handheld Base Station Analyzer for installation and maintenance of wireless networks. Designed as a lightweight base station analyzer meeting virtually all the testing needs of an RF technician. The Cell Master features Signal Analyzer options for 2G, 3G, and 4G cellular networks including LTE and WiMAX, and for digital broadcast.

Cable and Antenna Analyzer Highlights

- Measurements: RL, VSWR, Cable Loss, DTF, Phase
- 2-port Transmission Measurement: High/Low Power
- Sweep Speed: 1 msec/data point, typical
- Display: Single or Dual Measurement Touchscreen
- Calibration: OSL, InstaCal™, and FlexCal™
- Bias Tee: 32 V internal

Spectrum and Interference Analyzer Highlights

- Measurements: Occupied Bandwidth, Channel Power, ACPR, C/I
- Interference Analyzer: Spectrogram, Signal Strength, RSSI, Interference Mapping
- Dynamic Range: > 95 dB in 10 Hz RBW
- DANL: -152 dBm in 10 Hz RBW
- Phase Noise: -100 dBc/Hz max @ 10 kHz offset at 1 GHz
- Frequency Accuracy: ± 50 ppb with GPS On

Capabilities and Functional Highlights

- | | | | |
|--------------------|--------------------------------|----------------------------------|---------------------------------|
| • LTE (10 MHz B/W) | • Fixed, Mobile WiMAX | • Internal Power Meter | • E1, T1, T3 Backhaul Analyzer |
| • GSM/EDGE | • ISDB-T, ISDB-T SFN | • High Accuracy Power Meter | • 3 hour battery operation time |
| • W-CDMA/HSDPA | • GPS tagging of stored traces | • USB Power Sensors, 4 to 26 GHz | • < 5 minute warm-up time |
| • TD-SCDMA/HSDPA | • Interference Analyzer | • Channel Scanner | • USB Data Transfer |
| • CDMA, EV-DO | • Built-in Bias Tee | • Coverage Mapping | • Master Software Tools |



Cell Master™ MT8212E/MT8213E Base Station Analyzer featuring 8.4 in. Daylight Viewable Touchscreen
Compact Size: 273 mm x 199 mm x 91 mm, (10.7 in x 7.8 in x 3.6 in), Lightweight: 3.71 kg, (8.2 lbs)

Cell Master™ MT8212E, MT8213E Base Station Analyzer Specifications



Cable and Antenna Analyzer

Measurements

Measurements	VSWR
	Return Loss
	Cable Loss
	Distance-to-Fault (DTF) Return Loss
	Distance-to-Fault (DTF) VSWR
	1-Port Phase
	Smith Chart

Setup Parameters

Measurement Display	Single/Dual Measurement Display with independent markers
Frequency	Start/Stop, Signal Standard, Start Cal
DTF	Start/Stop, DTF Aid, Units (m/ft), Cable Loss, Propagation Velocity, Cable, Windowing
Windowing	Rectangular, Normal Side Lobe, Low Side Lobe, Minimum Side Lobe
Amplitude	Top, Bottom Auto Scale, Full Scale
Sweep	Run/Hold, Single/Continuous, RF Immunity (High/Low), Data Points, Averaging/Smoothing, Output Power (High/Low)
Data Points	137, 275, 551, 1102, 2204
Markers	Markers 1-6 (On/Off), Delta Markers 1-6 (On/Off), Marker to Peak/Valley, Marker Table
Traces	Recall, Copy to Display Memory, No Trace Math, Trace ± Memory, Trace Overlay
Limit Line	On/Off, Single Limit, Multi-segment (41), Limit Alarm, Clear
Calibration	Start Cal, Cal Type (Standard/FlexCal™)
Save/Recall	Setups, Measurements, Screen Shots Jpeg (save only)

Frequency

Frequency Range	2 MHz to 4 GHz (MT8212E), 2 MHz to 6 GHz (MT8213E)
Frequency Accuracy	≤ ± 2.5 ppm @ 25 °C
Frequency Resolution	1 kHz, (RF immunity low) 100 kHz, (RF immunity high)

Output Power

High	0 dBm, typical
Low	-30 dBm, typical

Interference Immunity

On-Channel	+17 dBm @ > 1.0 MHz from carrier frequency
On-Frequency	0 dBm within ± 10 kHz of the carrier frequency

Measurement Speed

Return Loss	≤ 1.00 msec/data point, RF immunity low, typical
Distance-to-Fault	≤ 1.25 msec/data point, RF immunity low, typical

Return Loss

Measurement Range	0 dB to 60 dB
Resolution	0.01 dB

VSWR

Measurement Range	1:1 to 65:1
Resolution	0.01

Cable Loss

Measurement Range	0 dB to 30 dB
Resolution	0.01 dB

Distance-to-Fault

Vertical Range Return Loss	0 dB to 60 dB
Vertical Range VSWR	1:1 to 65:1
Fault Resolution (meters)	$(1.5 \times 10^8 \times vp) / \Delta F$ (vp = velocity propagation constant, ΔF is F2-F1 in Hz)
Horizontal Range (meters)	0 to (Data Points-1) x Fault Resolution, to a maximum of 1500 meters (4921 ft)

Cell Master™ MT8212E, MT8213E Base Station Analyzer Specifications



Cable and Antenna Analyzer (continued)

1-Port Phase

Measurement Range	-180° to +180°
Resolution	0.01°



Smith Chart

Resolution	0.01
------------	------

Measurement Accuracy

Corrected Directivity	> 42 dB, OSL Calibration > 38 dB, InstaCal™ Calibration
-----------------------	--

Measurement Uncertainty

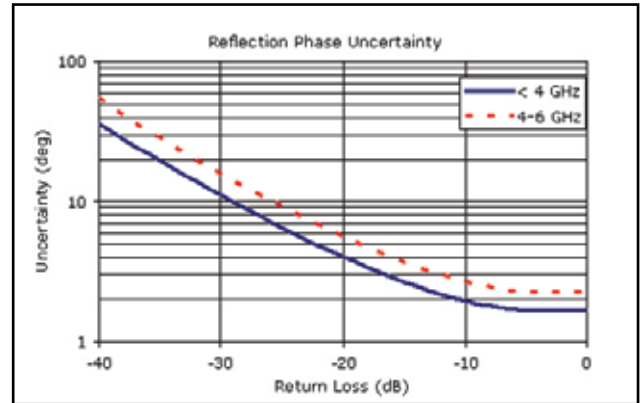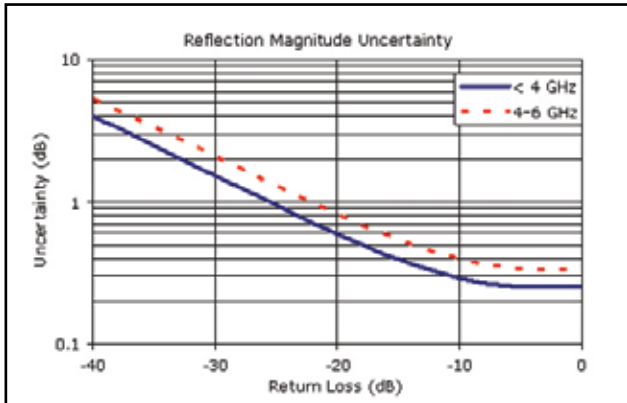

Optical Distance-to-Fault Module (P/N ODTF-1)

Wavelength	1550 nm, typical
Fiber Type	Single Mode Fiber
Event Resolution	10.2 cm (0.335 ft) maximum, or $150 / (n \cdot \Delta F)$, ΔF in MHz, n is IOR
Horizontal Range	1020 meter (3345 ft) maximum, or $(\#dp-1) \cdot \text{Event Resolution}$
Optical Dynamic Range	30 dB
Optical Output Power	3 dBm, typical
RF Connector	N(m)
Optical Connector	FC/APC
Datasheet	11410-00478 (for complete specifications)



2-Port Transmission Measurement (Option 0021)

Frequency

Frequency Range	2 MHz to 4 GHz (MT8212E), 2 MHz to 6 GHz (MT8213E)
Frequency Resolution	10 Hz

Output Power

High	0 dBm, typical
Low	-30 dBm, typical

Dynamic Range

2 MHz to 4 GHz	80 dB
4 GHz to 6 GHz	70 dB

Application Options Bias-Tee (On/Off), Impedance (50 Ω , 75 Ω , Other)

Bias-Tee (Option 0010)

Setup	On/Off, Voltage, Current (Low/High)
Voltage Range	+12 V to +32 V
Current (Low/High)	250 mA/450 mA, 1 A surge for 100 ms
Resolution	0.1 V

Cell Master™ MT8212E, MT8213E Base Station Analyzer Specifications



Spectrum Analyzer

Measurements

Smart Measurements	Field Strength (uses antenna calibration tables to measure dBm/m ² or dBmV/m) Occupied Bandwidth (measures 99% to 1% power channel of a signal) Channel Power (measures the total power in a specified bandwidth) ACPR (adjacent channel power ratio) AM/FM/SSB Demodulation (wide/narrow FM, USB and LSB), (audio out only) C/I (carrier-to-interference ratio) Coverage Mapping (requires Option 0431)
--------------------	---

Setup Parameters

Frequency	Center/Start/Stop, Span, Frequency Step, Signal Standard, Channel #
Amplitude	Reference Level (RL), Scale, Attenuation Auto/Level, RL Offset, Pre-Amp On/Off, Detection
Span	Span, Span Up/Down (1-2-5), Full Span, Zero Span, Last Span
Bandwidth	RBW, Auto RBW, VBW, Auto VBW, RBW/VBW, Span/RBW
File	Save, Recall, Delete, Directory Management
Save/Recall	Setups, Measurements, Limit Lines, Screen Shots Jpeg (save only), Save-on-Event
Save-on-Event	Crossing Limit Line, Sweep Complete, Save-then-Stop, Clear All
Delete	Selected File, All Measurements, All Mode Files, All Content
Directory Management	Sort Method (Name/Type/Date), Ascend/Descend, Internal/USB, Copy, Format USB
Application Options	Bias-Tee (On/Off), Impedance (50 Ω, 75 Ω, Other)

Sweep Functions

Sweep	Single/Continuous, Sweep Mode (Fast, Performance, No FFT), Reset, Detection, Minimum Sweep Time, Trigger Type, Gated Sweep (see Option 0090)
Detection	Peak, RMS, Negative, Sample, Quasi-peak
Triggers	Free Run, External, Video, Change Position, Manual

Trace Functions

Traces	Up to three Traces (A, B, C), View/Blank, Write/Hold, Trace A/B/C Operations
Trace A Operations	Normal, Max Hold, Min Hold, Average, # of Averages, (always the live trace)
Trace B Operations	A → B, B ↔ C, Max Hold, Min Hold
Trace C Operations	A → C, B ↔ C, Max Hold, Min Hold, A - B → C, B - A → C, Relative Reference (dB), Scale

Marker Functions

Markers	Markers 1-6 each with a Delta Marker, or Marker 1 Reference with Six Delta Markers, Marker Table (On/Off), All Markers Off
Marker Types	Style (Fixed/Tracking), Noise Marker, Frequency Counter Marker
Marker Auto-Position	Peak Search, Next Peak (Right/Left), Peak Threshold %, Set Marker to Channel, Marker Frequency to Center, Delta Marker to Span, Marker to Reference Level
Marker Table	1-6 markers frequency and amplitude plus delta markers frequency amplitude and offset

Limit Line Functions

Limit Lines	Upper/Lower, On/Off, Edit, Move, Envelope, Advanced, Limit Alarm, Default Limit
Limit Line Edit	Frequency, Amplitude, Add Point, Add Vertical, Delete Point, Next Point Left/Right
Limit Line Move	To Current Center Frequency, By dB or Hz, To Marker 1, Offset from Marker 1
Limit Line Envelope	Create Envelope, Update Amplitude, Points (41 max), Offset, Shape Square/Slope
Limit Line Advanced	Type (Absolute/Relative), Mirror, Save/Recall

Frequency

Frequency Range	100 kHz to 4 GHz (MT8212E), 100 kHz to 6 GHz (MT8213E)
Tuning Resolution	1 Hz
Frequency Reference	Aging: ± 1.0 ppm/year Accuracy: ± 1.5 ppm (25 °C ± 25 °C) + aging, ± 50 ppb with GPS On
Frequency Span	10 Hz to 4 GHz including zero span (MT8212E), 10 Hz to 6 GHz including zero span (MT8213E)
Sweep Time	Minimum 100 ms, 10 μs to 600 seconds in zero span
Sweep Time Accuracy	± 2% in zero span

Bandwidth

Resolution Bandwidth (RBW)	10 Hz to 3 MHz in 1-3 sequence ± 10% (1 MHz max in zero-span) (-3 dB bandwidth)
Video Bandwidth (VBW)	1 Hz to 3 MHz in 1-3 sequence (-3 dB bandwidth)
RBW with Quasi-Peak Detection	200 Hz, 9 KHz, 120 kHz (-6 dB bandwidth)
VBW with Quasi-Peak Detection	Auto VBW is On, RBW/VBW = 1

Cell Master™ MT8212E, MT8213E Base Station Analyzer Specifications



Spectrum Analyzer (continued)

Spectral Purity

SSB Phase Noise @ 1 GHz	> -100 dBc/Hz, -110 dBc/Hz typical @ 10 kHz offset -105 dBc/Hz, -112 dBc/Hz typical @ 100 kHz offset -115 dBc/Hz, -121 dBc/Hz typical @ 1 MHz offset
-------------------------	--

Amplitude Ranges

Dynamic Range	> 95 dB (2.4 GHz), 2/3 (TOI-DANL) in 10 Hz RBW
Measurement Range	DANL to +26 dBm
Display Range	1 dB to 15 dB/div in 1 dB steps, ten divisions displayed
Reference Level Range	-120 dBm to +30 dBm
Maximum Continuous Input	+35 dBm
Attenuator Resolution	0 dB to 55 dB in 5 dB steps
Amplitude Units	Log Scale Modes: dBm, dBV, dBmv, dBμV Linear Scale Modes: nV, μV, mV, V, kV, nW, μW, mW, W, kW

Amplitude Accuracy

100 kHz to 4.0 GHz	± 1.25 dB, ± 0.5 dB typical
> 4.0 GHz to 6 GHz	± 1.50 dB, ± 0.5 dB typical

Displayed Average Noise Level (DANL)

(RBW Normalized to 1 Hz, 0 dB attenuation)	Preamp Off (Reference level -20 dBm)		Preamp On (Reference level -50 dBm)	
	Maximum	Typical	Maximum	Typical
10 MHz to 2.4 GHz	-141 dBm	-146 dBm	-157 dBm	-162 dBm
> 2.4 GHz to 4 GHz	-136 dBm	-141 dBm	-154 dBm	-159 dBm
> 4 GHz to 5 GHz	-133 dBm	-138 dBm	-154 dBm	-155 dBm
> 5 GHz to 6 GHz	-125 dBm	-131 dBm	-146 dBm	-150 dBm
(RBW = 10 Hz, 0 dB attenuation)				
10 MHz to 2.4 GHz	-131 dBm	-136 dBm	-147 dBm	-152 dBm
> 2.4 GHz to 4 GHz	-126 dBm	-131 dBm	-144 dBm	-149 dBm
> 4 GHz to 5 GHz	-123 dBm	-128 dBm	-144 dBm	-145 dBm
> 5 GHz to 6 GHz	-115 dBm	-121 dBm	-136 dBm	-140 dBm

Spurs

Residual Spurious	< -90 dBm (RF input terminated, 0 dB input attenuation, > 10 MHz)
Input-Related Spurious	< -75 dBc (0 dB attenuation, -30 dBm input, span < 1.7 GHz, carrier offset > 4.5 MHz)
Exceptions, typical	< -70 dBc @ < 2.5 GHz, with 2072.5 MHz Input < -68 dBc @ F1-280 MHz with F1 Input < -70 dBc @ F1 + 190 MHz with F1 Input < -52 dBc @ 7349-2F2 MHz, with F2 Input, where F2 < 2424.5 MHz < -55 dBc @ 190.5 ± F1/2 MHz, with F1 Input, where F1 < 1 GHz

Third-Order Intercept (TOI)

	Preamp Off (-20 dBm tones 100 kHz apart, 10 dB attenuation)
800 MHz	+16 dBm
2400 MHz	+20 dBm
200 MHz to 2200 MHz	+25 dBm, typical
> 2.2 GHz to 5.0 GHz	+28 dBm, typical
> 5.0 GHz to 6.0 GHz	+33 dBm, typical

Second Harmonic Distortion

	Preamp Off, 0 dB input attenuation, -30 dBm input
50 MHz	-56 dBc
> 50 MHz to 200 MHz	-60 dBc, typical
> 200 MHz to 3000 MHz	-70 dBc, typical

VSWR

2:1, typical

Cell Master™ MT8212E, MT8213E Base Station Analyzer Specifications



Coverage Mapping (Options 0431)

Measurements

Indoor Mapping	Outdoor Mapping
RSSI	RSSI
ACPR	ACPR

Setup Parameters

Frequency	Center/Start/Stop, Span, Freq Step, Signal Standard, Channel #, Channel Increment
Amplitude	Reference Level (RL), Scale, Attenuation Auto/Level, RL Offset, Pre-Amp On/Off, Detection
Span	Span, Span Up/Down (1-2-5), Full Span, Zero Span, Last Span
BW	RBW, Auto RBW, VBW, Auto VBW, RBW/VBW, Span/VBW
Measurement Setup	ACPR, RSSI
Point Distance / Time Setup	Repeat Type Time Distance
Save Points Map	Save KML, JPEG
Recall Points Map	Recall Map, Recall KML Points only, Recall KML Points with Map, Recall Default Grid



Interference Analyzer (Option 0025)

Measurements	Spectrum Field Strength Occupied Bandwidth Channel Power Adjacent Channel Power (ACPR) AM/FM/SSB Demodulation (Wide/Narrow FM, Upper/Lower SSB), (audio out only) Carrier-to-Interference ratio (C/I) Spectrogram (Collect data up to 72 hours) Signal Strength (Gives visual and aural indication of signal strength) Received Signal Strength Indicator (RSSI) (collect data up to one week) Gives visual and aural indication of signal strength Signal ID (up to 12 signals) Center Frequency Bandwidth Signal Type (FM, GSM, W-CDMA, CDMA, Wi-Fi) Closest Channel Number Number of Carriers Signal-to-Noise Ratio (SNR) > 10 dB Interference Mapping Triangulate location of interference with on display maps
Application Options	Bias-Tee (On/Off), Impedance (50 Ω, 75 Ω, Other)

GPS Receiver Option (Option 0031) (Antenna sold separately, P/N 2000-1528-R)

Setup	On/Off, Antenna Voltage 3.3/5.0 V, GPS Info
GPS Time/Location Indicator	Time, Latitude, Longitude and Altitude on display Time, Latitude, Longitude and Altitude with trace storage
High Frequency Accuracy when GPS Antenna is connected	Spectrum Analyzer, Interference Analyzer, CW Signal Analyzers < ± 50 ppb with GPS On, 3 minutes after satellite lock in selected mode
Connector	SMA, Female

Cell Master™ MT8212E, MT8213E Base Station Analyzer Specifications



Channel Scanner (Option 0027)

Number of Channels	1 to 20 Channels
Measurements	Graph/Table, Max Hold (On/5 sec/Off), Freq/Channel, Current/Max, Single/Dual Color
Scanner	Scan Channels, Scan Frequencies, Scan Customer List, Scan Script Master™
Amplitude	Reference Level, Scale
Custom Scan	Signal Standard, Channel, # of Channels, Channel Step Size, Custom Scan
Frequency Range	100 kHz to 4 GHz (MT8212E), 100 kHz to 6 GHz (MT8213E)
Frequency Accuracy	± 10 Hz + Time base error
Measurement Range	-110 dBm to +26 dBm
Application Options	Bias-Tee (On/Off), Impedance (50 Ω, 75 Ω, Other)



CW Signal Generator Option (Option 0028) (Requires CW Signal Generator Kit, P/N 69793)

Setup Parameters

Frequency	Frequency, Signal Standard, Channel Number, Display Setup Help
Amplitude	Power Level (Low/High), Offset (dB)
Frequency Range	2 MHz to 2 GHz
Frequency Reference	Accuracy: ± 1.5 ppm (25 °C ± 25 °C) + aging, < ± 50 ppb with GPS On
Output Power	High 0 dBm typical, Low -30 dBm typical Attenuator (included in kit 69793): 0 to 90 dB in 1 dB steps

Gated Sweep (Option 0090)

Mode	Spectrum Analyzer, Sweep
Trigger	External TTL
Setup	Gated Sweep (On/Off) Gate Polarity (Rising, Falling) Gate Delay (0 ms to 65 ms typical) Gate Length (1 μs to 65 ms typical) Zero Span Time

Cell Master™ MT8212E, MT8213E Base Station Analyzer Specifications



Power Meter

Frequency	Center/Start/Stop, Span, Frequency Step, Signal Standard, Channel #, Full Band
Amplitude	Maximum, Minimum, Offset, Relative On/Off, Units, Auto Scale
Average	Acquisition Fast/Med/Slow, # of Running Averages
Limits	Limit On/Off, Limit Upper/Lower
Frequency Range	10 MHz to 4 GHz (MT8212E), 10 MHz to 6 GHz (MT8213E)
Span	1 kHz to 100 MHz
Display Range	-140 dBm to +30 dBm, ≤ 40 dB span
Measurement Range	-120 dBm to +26 dBm
Offset Range	0 dB to +100 dB
VSWR	2:1 typical
Maximum Continuous Input	+35 dBm without attenuator
Accuracy	Same as Spectrum Analyzer
Application Options	Impedance (50 Ω, 75 Ω, Other)



High Accuracy Power Meter (Option 0019) (Requires external USB Power Sensor(s))

Amplitude	Maximum, Minimum, Offset, Relative On/Off, Units, Auto Scale
Average	# of Running Averages, Max Hold
Zero/Cal	Zero On/Off, Cal Factor (Center Frequency, Signal Standard)
Limits	Limit On/Off, Limit Upper/Lower

Power Sensor Model	PSN50	MA24104A	MA24106A	MA24108/18/26A
Description	High Accuracy RF Power Sensor	Inline High Power Sensor	High Accuracy RF Power Sensor	Microwave USB Power Sensor
Frequency Range	50 MHz to 6 GHz	600 MHz to 4 GHz	50 MHz to 6 GHz	10 MHz to 8 GHz (MA24108A) 10 MHz to 18 GHz (MA24118A) 10 MHz to 26 GHz (MA24126A)
Connector	Type N(m), 50 Ω	Type N(m), 50 Ω	Type N(m), 50 Ω	Type N(m), 50 Ω (MA24108/18A) Type K(m), 50 Ω (MA24126A)
Dynamic Range	-30 dBm to +20 dBm (0.001 mW to 100 mW)	+3 dBm to +51.76 dBm (2 mW to 150 W)	-40 dBm to +23 dBm (0.1 μW to 200 mW)	-40 dBm to +20 dBm (0.1 μW to 100 mW)
VBW	100 Hz	100 Hz	100 Hz	50 kHz
Measurand	True-RMS	True-RMS	True-RMS	True-RMS, Slot Power, Burst Average Power
Measurement Uncertainty	± 0.16 dB ¹	± 0.17 dB ²	± 0.16 dB ¹	± 0.18 dB ³
Datasheet (for complete specifications)	11410-00414	11410-00483	11410-00424	11410-00504

- Notes:
- 1) Total RSS measurement uncertainty (0 °C to 50 °C) for power measurements of a CW signal greater than -20 dBm with zero mismatch errors.
 - 2) Expanded uncertainty with K=2 for power measurements of a CW signal greater than +20 dBm with a matched load. Measurement results referenced to the input side of the sensor.
 - 3) Expanded uncertainty with K=2 for power measurements of a CW signal greater than -20 dBm with zero mismatch errors.

Cell Master™ MT8212E, MT8213E Base Station Analyzer Specifications



LTE Signal Analyzers (Options 0541, 0542, 0546)

Measurements			
RF (Option 0541)	Modulation (Option 0542)	Over-the-Air (OTA) (Option 0546)	Pass/Fail (User Editable)
Channel Spectrum Channel Power Occupied Bandwidth ACLR RF Summary	Constellation Reference Signal Power Sync Signal Power EVM Frequency Error Carrier Frequency Cell ID Sector ID Group ID Control Channel Power RS P-SS S-SS PBCH PCFICH Modulation Summary	Sync Signal Power (Six Strongest) Power Cell ID Sector ID Group ID Dominance	Pass Fail All Pass/Fail RF Pass Fail Demod Measurements Channel Power Occupied Bandwidth ACLR Frequency Error Carrier Frequency Dominance EVM (peak) EVM (rms) RS Power SS Power P-SS Power S-SS Power PBCH Power PCFICH Power Cell ID Group ID Sector ID
Setup Parameters			
	Bandwidth	10 MHz	
	Span	1.4, 3, 5, 10, 15, 20, 30 MHz	
	Frame Length	2.5, 5.0, 10.0 msec	
	Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel	
	Amplitude	Scale/Division, Power Offset, Auto Range, Adjust Range	
	Sweep	Single/Continuous, Trigger Sweep	
	Save/Recall	Setup, Measurement, Screen Shot (save only), to Internal/External Memory	
	Measurement Summary Screens	Overall Measurements, RF Measurements, Modulation Quality	
RF Measurements (Option 0541)			
	RF Channel Power Accuracy	± 1.5 dB, ± 1.0 dB typical, (RF input -50 dBm to +10 dBm)	
Modulation (Option 0542)			
	Frequency Error	± 10 Hz + time base error, 99% confidence level	
	Residual EVM (rms)	2.5% typical (E-UTRA Test Model 3.1) (RF Input -50 dBm to +10 dBm)	
Over-the-Air (OTA) Measurements (Option 0546)			
	Scanner	Six strongest Sync Signals	
	Auto Save	Yes	
	GPS Tagging and Logging	Yes	

Cell Master™ MT8212E, MT8213E Base Station Analyzer Specifications



GSM/GPRS/EDGE Signal Analyzers (Options 0040, 0041)

Measurements

RF (Option 0040)	Demodulation (Option 0041)	Over-the-Air (OTA)	Pass/Fail (User Editable)
Channel Spectrum Channel Power Occupied Bandwidth Burst Power Average Burst Power Frequency Error Modulation Type BSIC (NCC, BCC) Multi-channel Spectrum Power vs. Time (Frame/Slot) Channel Power Occupied Bandwidth Burst Power Average Burst Power Frequency Error Modulation Type BSIC (NCC, BCC)	Phase Error EVM Origin Offset C/I Modulation Type Magnitude Error BSIC (NCC, BCC)	RF Measurements and Demodulation can be made OTA. There are no additional OTA Measurements.	Channel Power Occupied Bandwidth Burst Power Average Burst power Frequency Error Phase Error EVM Origin Offset C/I Magnitude Error

Setup Parameters

GSM/EDGE Select	Auto, GSM, EDGE
Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
Amplitude	Power Offset, Auto Range, Adjust Range
Sweep	Single/Continuous, Trigger Sweep
Save/Recall	Setup, Measurement, Screen Shot (save only), to Internal/External Memory
Measurement Summary Screens	Overall Measurements, RF Measurements, Signal Quality Measurements

RF Measurements (Option 0040) (temperature range 15 °C to 35 °C)

Frequency Error	± 10 Hz + time base error, 99% confidence level
Occupied Bandwidth	Bandwidth within which 99% of the power transmitted on a single channel lies
Burst Power Error	± 1.5 dB, ± 1 dB typical, (-50 dBm to +20 dBm)

Demodulation (Option 0041) (temperature range 15 °C to 35 °C)

GSMK Modulation Quality (RMS Phase)	
Measurement Accuracy	± 1 deg
Residual Error (GSMK)	1 deg
8 PSK Modulation Quality (EVM)	
Measurement Accuracy	± 1.5%
Residual Error (8 PSK)	2.5%

Cell Master™ MT8212E, MT8213E Base Station Analyzer Specifications



W-CDMA/HSDPA Signal Analyzers (Options 0044, 0045 or 0065, 0035)

Measurements			
RF (Option 0044)	Demodulation (Option 0045 or 0065)	Over-the-Air (OTA) (Option 0035)	Pass/Fail (User Editable)
Band Spectrum	Code Domain Power Graph	Scrambling Code Scanner (Six)	Max Output Power
Channel Spectrum	P-CPICH Power	Scrambling Codes	Frequency Error
Channel Power	Channel Power	CPICH	EVM
Occupied Bandwidth	Noise Floor	E_c/I_0	CPICH
Peak-to-Average Power	EVM	E_c	Occupied Bandwidth
Spectral Emission Mask	Carrier Feed Through	Pilot Dominance	Spectral Mask
Single carrier ACLR	Peak Code Domain Error	OTA Total Power	ACLR
Multi-carrier ACLR	Carrier Frequency	Multipath Scanner (Six)	PCDE
	Frequency Error	Six Multipaths	P-CCPCH
	Control Channel Power	Tau	S-CCPCH
	Abs/Rel/Delta Power	Distance	Code Spread 3
	CPICH, P-CCPCH	RSCP	PICH
	S-CCPCH, PICH	Relative Power	Code 128
	P-SCH, S-SCH	Multipath Power	
	HSDPA		Test Models
	Power vs. Time		1 (16), (32), (64)
	Constellation		2
	Code Domain Power Table		3 (16), (32)
	Code, Status		4 (+CPICH), (-CPICH)
	EVM, Modulation Type		5 (2 HS), (4 HS), (8 HS)
	Power, Code Utilization		
	Power Amplifier Capacity		
	Codogram		

Setup Parameters

Scrambling Code, Threshold	Auto, Manual
User Selectable	Scrambling Code, S-CCPCH Spread, S-CCPCH Code, PICH Code, Threshold, Max Amp Power, CPICH Power, Frequency Error Average
Maximum Spreading Factor	256, 512
Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
Amplitude	Scale/Division, Power Offset, Auto Range, Adjust Range, Units (dBm/Watts)
Marker	Six Markers, Table On/Off
Sweep	Single/Continuous, Trigger Sweep
Save/Recall	Setup, Measurement, Screen Shot (save only), to Internal/External Memory
Measurement Summary Screens	Overall Measurements, RF Measurements, Signal Quality Measurements

RF Measurements (Option 0044) (temperature range 15 °C to 35 °C)

Frequency Range	Bands I – XIV, XVII
RF Channel Power Accuracy	± 1.25 dB, ± 0.7 dB typical, (temperature range 15 °C to 35 °C)
Occupied Bandwidth Accuracy	± 100 kHz
Adjacent Channel Leakage Ratio (ACLR)	-54 dB/-59 dB ± 0.8 dB @ 5 MHz/10 MHz offset, typical, Bands I – VI, VIII – XIV, XVII -54 dB/-57 dB ± 1.0 dB @ 5 MHz/10 MHz offset, typical, Band VII

Demodulation (Option 0045 for W-CDMA only or 0065 for W-CDMA and HSDPA) (temperature range 15 °C to 35 °C)

Frequency Error	± 10 Hz + time base error, 99% confidence level
EVM Accuracy	± 2.5%, 6% ≤ EVM ≤ 25%
Residual EVM (RMS)	3.25% typical
Code Domain Power	± 0.5 dB for code channel power > -25 dB, 16, 32, 64 DCPH (test model 1), 16, 32 DCPH (test model 2, 3)
CPICH (dBm) Accuracy	± 0.8 dB typical

Over-the-Air (OTA) Measurements (Option 0035)

Scrambling Code Scanner	Six strongest Scrambling Codes
Multipath Scanner	Multipath power of six signals relative to strongest pilot

Cell Master™ MT8212E, MT8213E Base Station Analyzer Specifications



cdmaOne/CDMA2000 1X Signal Analyzers (Option 0042, 0043, 0033)

Measurements

RF (Option 0042)	Demodulation (Option 0043)	Over-the-Air (OTA) (Option 0033)	Pass/Fail (User Editable)
Channel Spectrum Channel Power Occupied Bandwidth Peak-to-Average Power Spectral Emission Mask Multi-carrier ACPR	Code Domain Power Graph Pilot Power Channel Power Noise Floor Rho Carrier Feed Through Tau RMS Phase Error Frequency Error Abs/Rel/ Power Pilot Page Sync Q Page Code Domain Power Table Code Status Power Multiple Codes Code Utilization	Pilot Scanner (Nine) PN E_C/I_0 Tau Pilot Power Channel Power Pilot Dominance Multipath Scanner (Six) E_C/I_0 Tau Channel Power Multipath Power Limit Test – 10 Tests Averaged Rho Adjusted Rho Multipath Pilot Dominance Pilot Power Pass/Fail Status	Channel Power Occupied Bandwidth Peak-to-Average Power Spectral Mask Test Frequency Error Channel Frequency Frequency error Pilot Power Noise Floor Rho Carrier Feed Through Tau RMS Phase Error Code Utilization Measured PN Pilot Dominance Multipath Power

Setup Parameters

PN Setup	PN Trigger (No Trigger, GPS, External), PN Search Type (Auto, Manual), PN Offset
Walsh Codes	64, 128
Measurement Speed	Fast, Normal, Slow
External Trigger Polarity	Rising, Falling
Number of Carriers	1 to 5
Carrier Bandwidth	1.23, 1.24, 1.25 MHz
Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
Amplitude	Scale/Division, Power Offset, Auto Range, Adjust Range, Units (dBm/Watts)
Sweep	Single/Continuous, Trigger Sweep
Save/Recall	Setup, Measurement, Screen Shot (save only), to Internal/External Memory
Measurement Summary Screens	Overall Measurements, RF Measurements, Signal Quality Measurements

RF Measurements (Option 0042) (temperature range 15 °C to 35 °C)

RF Channel Power Accuracy	± 1.5 dB, ± 1.0 dB typical, (RF input -50 dBm to +20 dBm)
---------------------------	---

Demodulation (Option 0043) (temperature range 15 °C to 35 °C)

Frequency Error	± 10 Hz + time base error, 99% confidence level (in slow mode)
Rho Accuracy	± 0.005, for Rho > 0.9
Residual Rho	> 0.995, typical, > 0.99 maximum, (RF input -50 dBm to +20 dBm)
PN Offset	1 x 64 chips
Pilot Power Accuracy	± 1.0 dB typical, relative to channel power
Tau	± 0.5 µs typical, ± 1.0 µs maximum

Over-the-Air (OTA) Measurements (Option 0033)

Pilot Scanner	Nine strongest pilots
Multipath Scanner	Multipath power of six signals relative to strongest pilot
Limit Test	Average of ten tests compared to limit

Cell Master™ MT8212E, MT8213E Base Station Analyzer Specifications



CDMA2000 1xEV-DO Signal Analyzers (Option 0062, 0063, 0034)

Measurements			
RF (Option 0062)	Demodulation (Option 0063)	Over-the-Air (OTA) (Option 0034)	Pass/Fail (User Editable)
Channel Spectrum	MAC Code Domain Power Graph	Pilot Scanner (Nine)	Channel Power
Channel Power	Pilot & MAC Power	PN	Occupied Bandwidth
Occupied Bandwidth	Channel Power	E_c/I_o	Peak-to-Average Power
Peak-to-Average Power	Frequency Error	Tau	Carrier Frequency
Power vs. Time	Rho Pilot	Pilot Power	Frequency Error
Pilot & MAC Power	Rho Overall	Channel Power	Spectral Mask
Channel Power	Data Modulation	Pilot Dominance	Noise Floor
Frequency Error	Noise Floor	Multipath Scanner (Six)	Pilot Power
Idle Activity	MAC Code Domain Power Table	E_c/I_o	RMS Phase Error
On/Off Ratio	Code	Tau	Tau
Spectral Emission Mask	Status	Channel Power	Code Utilization
Multi-carrier ACPR	Power	Multipath Power	Measured PN
	Code Utilization		Pilot Dominance
	Data Code Domain Power		Multipath Power
	Active Data Power		
	Data Modulation		
	Rho Pilot		
	Rho Overall		
	Maximum Data CDP		
	Minimum Data CDP		

Setup Parameters

PN Setup	PN Trigger (No Trigger, GPS, External), PN Search Type (Auto, Manual), PN Offset
Walsh Codes	64, 128
Measurement Speed	Fast, Normal, Slow
External Trigger Polarity	Rising, Falling
Slot Type	Auto, Active, Idle
Number of Carriers	1 to 5
Carrier Bandwidth	1.23, 1.24, 1.25 MHz
Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
Amplitude	Scale/Division, Power Offset, Auto Range, Adjust Range, Units (dBm/Watts)
Sweep	Single/Continuous, Trigger Sweep
Save/Recall	Setup, Measurement, Screen Shot (save only), to Internal/External Memory
Measurement Summary Screens	Overall Measurements, RF Measurements, Signal Quality Measurements

RF Measurements (Option 0042) (temperature range 15 °C to 35 °C)

RF Channel Power Accuracy	± 1.5 dB, ±1.0 dB typical, (RF input -50 dBm to +20 dBm)
---------------------------	--

Demodulation (Option 0063) (temperature range 15 °C to 35 °C)

EV-DO Compatibility	Rev 0 and Rev A
Frequency Error	± 10 Hz + time base error, 99% confidence level
Rho Accuracy	± 0.01, for Rho > 0.9
Residual Rho	> 0.995 typical, > 0.99, maximum (RF input -50 dBm to +20 dBm)
PN Offset	Within 1 x 64 chips
Pilot Power Accuracy	± 1.0 dB typical, relative to channel power
Tau	± 0.5 µs typical, ± 1.0 µs maximum

Over-the-Air (OTA) Measurements (Option 0034)

Pilot Scanner	Nine strongest pilots
Multipath Scanner	Multipath power of six signals relative to strongest pilot

Cell Master™ MT8212E, MT8213E Base Station Analyzer Specifications



IEEE 802.16 Fixed WiMAX Signal Analyzers (Options 0046, 0047)

Measurements

RF (Option 0046)	Demodulation (Option 0047)	Over-the-Air (OTA)	Pass/Fail (User Editable)
Channel Spectrum Channel Power Occupied Bandwidth Power vs. Time Channel Power Preamble Power Data Burst Power Crest Factor ACPR	Constellation RCE (RMS/Peak) EVM (RMS/Peak) Frequency Error Carrier Frequency Base Station ID Spectral Flatness Adjacent Subcarrier Flatness EVM vs. Subcarrier/Symbol RCE EVM Frequency Error Carrier Frequency Base Station ID	RF Measurements and Demodulation can be made OTA. There are no additional OTA Measurements.	Channel Power Occupied Bandwidth Burst Power Preamble Power Crest Factor Frequency Error Carrier Frequency EVM RCE Base Station ID

Setup Parameters

Bandwidth	1.25, 1.50, 2.50, 3.50, 5.00, 5.50, 6.00, 7.00, 10.00 MHz
Cyclic Prefix Ratio (CP)	1/4, 1/8, 1/16, 1/32
Span	5, 10, 15, 20 MHz
Frame Length	2.5, 5.0, 10.0 msec
Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
Amplitude	Scale/Division, Power Offset, Auto Range, Adjust Range
Sweep	Single/Continuous, Trigger Sweep
Save/Recall	Setup, Measurement, Screen Shot (save only), to Internal/External Memory
Measurement Summary Screens	Overall Measurements, RF Measurements, Signal Quality Measurements

RF Measurements (Option 0046) (temperature range 15 °C to 35 °C)

RF Channel Power Accuracy	± 1.5 dB, ± 1.0 dB typical, (RF input -50 dBm to +20 dBm)
---------------------------	---

Demodulation (Option 0047) (temperature range 15 °C to 35 °C)

Frequency Error	0.07 ppm + time base error, 99% confidence level
Residual EVM (rms)	3% typical, 3.5% maximum (RF Input -50 dBm to +20 dBm)

Cell Master™ MT8212E, MT8213E Base Station Analyzer Specifications



IEEE 802.16 Mobile WiMAX Signal Analyzers (Options 0066, 0067, 0037)

Measurements			
RF (Option 0066)	Demodulation (Option 0067)	Over-the-Air (OTA) (Option 0037)	Pass/Fail (User Editable)
Channel Spectrum	Constellation	Channel Power Monitor	Channel Power
Channel Power	RCE (RMS/Peak)	Preamble Scanner (Six)	Occupied Bandwidth
Occupied Bandwidth	EVM (RMS/Peak)	Preamble	Downlink Burst Power
Power vs. Time	Frequency Error	Relative Power	Uplink Burst Power
Channel Power	CINR	Cell ID	Preamble Power
Preamble Power	Base Station ID	Sector ID	Crest Factor
Downlink Burst Power	Sector ID	PCINR	Frequency Error
Uplink Burst Power	Spectral Flatness	Dominant Preamble	Carrier Frequency
ACPR	Adjacent Subcarrier Flatness	Base Station ID	EVM
	EVM vs. Subcarrier/Symbol		RCE
	RCE (RMS/Peak)		Sector ID
	EVM (RMS/Peak)		
	Frequency Error		
	CINR		
	Base Station ID		
	Sector ID		
	DL-MAP (Tree View)		

Setup Parameters

Zone Type	PUSC
DL-MAP Auto Decoding	Convolutional Coding (CC), Convolutional Turbo Coding (CTC)
Bandwidths	3.50, 5.00, 7.00, 8.75, 10.00 MHz
Cyclic Prefix Ratio (CP)	1/8
Span	5, 10, 20, 30 MHz
Frame Lengths	5, 10 msec
Demodulation	Auto, Manual, FCH
Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
Amplitude	Scale/Division, Power Offset, Auto Range, Adjust Range
Sweep	Single/Continuous, Trigger Sweep
Save/Recall	Setup, Measurement, Screen Shot (save only), to Internal/External Memory
Measurement Summary Screens	Overall Measurements, RF Measurements, Signal Quality Measurements

RF Measurements (Option 0066) (temperature range 15 °C to 35 °C)

RF Channel Power Accuracy	± 1.5 dB, ± 1.0 dB typical, (RF input -50 dBm to +20 dBm)
---------------------------	---

Demodulation (Option 0067) (temperature range 15 °C to 35 °C)

Frequency Error	0.02 ppm + time base error, 99% confidence level
Residual EVM (rms)	2.5% typical, 3.0% maximum, (RF Input -50 dBm to +20 dBm)

Over-the-Air (OTA) Measurements (Option 0037)

Channel Power Monitor	Over time (one week), measurement time interval 1 to 60 sec
Preamble Scanner	Six Strongest Preambles
Auto Save	Yes
GPS Logging	Yes

Cell Master™ MT8212E, MT8213E Base Station Analyzer Specifications



TD-SCDMA/HSDPA Signal Analyzers (Options 0060, 0061, 0038)

Measurements

RF (Option 0060)	Demodulation (Option 0061)	Over-the-Air (OTA) (Option 0038)	Pass/Fail (User Editable)
Channel Spectrum	Code Domain Power/Error (QPSK/8 PSK/16 QAM)	Code Scan (32)	Occupied Bandwidth
Channel Power	Slot Power	Scrambling Code Group	Channel Power
Occupied Bandwidth	DwPTS Power	Tau	Channel Power RCC
Left Channel Power	Noise Floor	E_c/I_0	On/Off Ratio
Left Channel Occ B/W	Frequency Error	Pilot Dominance	Peak-to-Average Ratio
Right Channel Power	Tau	Tau Scan (Six)	Frequency Error
Right Channel Occ B/W	Scrambling Code	Sync-DL#	EVM
Power vs. Time	EVM	Tau	Peak EVM
Six Slot Powers	Peak EVM	E_c/I_0	Peak Code Domain Error
Channel Power (RRC)	Peak Code Domain Error	DwPTS Power	Tau
DL-UL Delta Power		Pilot Dominance	Noise Floor
UpPTS Power			
DwPTS Power			
On/Off Ratio			
Slot Peak-to-Average Power			
Spectral Emission			

Setup Parameters

Slot Selection	Auto, 0-6
Trigger	Trigger Type (No Trigger/GPS/External), External Trigger (Rising/Falling), Tau Offset
SYNC-DL Code	Auto, 0-31
Scrambling/Midamble Code	Auto, 0-127
Maximum Users	Auto, 2, 4, 6, 8, 10, 12, 14, 16
Measurement Speed	Fast, Normal, Slow
User Selectable	Uplink Switch Point, Number of Carriers (1, 3), Tau Offset
Demodulation Type	Auto, QPSK, 8 PSK, 16 QAM
Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
Amplitude	Scale/Division, Power Offset, Auto Range, Adjust Range, Units (dBm/Watts)
Sweep	Hold/Run, Trigger Sweep
Save/Recall	Setup, Measurement, Screen Shot (save only), to Internal/External Memory
Measurement Summary Screens	Overall Measurements, RF Measurements, Signal Quality Measurements

RF Measurements (Option 0060) (temperature range 15 °C to 35 °C)

RF Channel Power Accuracy (RRC)	± 1.5 dB, ± 1.0 dB typical, (slot power -40 dBm to +10 dBm)
Frequency Error	± 10 Hz + time base error, in the presence of a downlink slot

Demodulation (Option 0061) (temperature range 15 °C to 35 °C)

Supported Modulation	QPSK, 8 PSK, 16 QAM
Residual EVM (rms)	3% typical, P-CCPH slot power > -50 dBm
PN Offset	Within 1 x 64 chips
Pilot Power Accuracy	± 1.0 dB typical
Timing Error (Tau) for Dominant SYNC-DL	± 0.2 μ s (external trigger)
Spreading Factor	1, 16

Over-the-Air (OTA) Measurements (Option 0038)

Code Scanner	32 Sync Codes and associated Scrambling Code Groups
Tau Scanner	Six strongest Sync Codes
Auto Save	Yes
GPS Logging	Yes

Cell Master™ MT8212E, MT8213E Base Station Analyzer Specifications



ISDB-T (Options 0030, 0032) For full specifications, see Technical Data Sheet 11410-00436

Measurements

ISDB-T RF (Option 0030)	ISDB-T Signal Analysis (Option 0030)	ISDB-T Measurement Modes (Option 0030)	ISDB-T SFN Analysis (Option 0032)
Signal Power	Constellation (w/zoom)	Custom	Delay Profile (w/zoom)
Channel Power	Layer A, B, C, TMCC	User specified measurement and setup parameters	Inband Spectrum
Termination Voltage	Sub-carrier MER	Easy	Measured Data
Open Terminal Voltage	Delay Profile (w/zoom)	User specified measurements.	Channel Power
Field Strength	Frequency Response	Some setup parameters are automatically set or detected	Delay
Spectrum Monitor	Measured Data	Batch	DU Ratio
Channel Power	Frequency	User specified measurements and channels for automatic measurement, display of results and storage	Power
Zone Center Channel	Frequency Offset		Field Strength
Zone Center Frequency	MER (Total, Layer A/B/C, TMCC, AC1)		
Spectrum Mask	Modulation (Layer A/B/C)		
Mask (Standard A) Japan	Mode, GI		
Mask (Standard B) Japan	Sub-carrier MER w/marker		
Mask (Critical) Brazil	Delay w/marker		
Mask (Sub-critical) Brazil	Frequency Response w/ marker		
Mask (Non-critical) Brazil			
Phase Noise			
Spurious Emissions			

Setup Parameters

Channel Map	UHF (Japan), UHF (Brazil), None
Channel	13 to 62 (Japan), 14 to 69 (Brazil)
Frequency	35 MHz to 806 MHz
Pre-amp	On, Off
Reference Level Setting	-25 dBm to +20 dBm / 5 dB steps (Pre Amp: Off), -50 dBm to -10 dBm/10 dB steps (Pre Amp: On)

ISDB-T Signal Analyzer (Option 0030)

Channel Power Accuracy	± 2 dB, (RF input -84 dBm to -10 dBm)
Frequency Lock Range	± 90 kHz
Frequency Offset Accuracy	± (measurement frequency x reference frequency accuracy) ± 0.3 Hz
Residual MER	≥ 42 dB (Pre Amp: Off, Reference level: -20 dBm) ≥ 37 dB (Pre Amp: On, Reference level: -50 dBm)
Delay Profile Resolution	0.12 μs, 0.1 dB
Frequency Response Resolution	1 kHz, 0.1 dB
Phase Noise Range	-40 dBc/Hz to -140 dBc/Hz
Spurious Emissions Search Range	5 MHz to 5x main signal frequency

ISDB-T SFN Analyzer (Option 0032)

Delay Profile Display Range	-1008 μs to +1008 μs
Delay Wave Estimated Level Accuracy	± 2.5 dB
DU Ratio Accuracy	± 1 dB
Inband Spectrum Range	± 2.74 MHz (Mode 2), ± 2.76 MHz (Mode 3)

Cell Master™ MT8212E, MT8213E Base Station Analyzer Specifications



Backhaul Analyzers (Options 0051, 0052, 0053)

T1 Bit-Error-Rate Tester (BERT) (Option 0051)

Measurements

Error Detection	Frame Bits, Bit Errors, BER, BPV, CRC, PATLS
Error Analysis (ITU G-821)	Errored Seconds (ES), Error Free Seconds (EFS), Severely Errored Seconds (SES), Unavailable Seconds (UAS), Available Seconds (AS), Degraded Minutes (DGRM)
Rx Signal	Frequency (± 5 ppm, Max/Min), Vpp ($\pm 5\%$) (Max/Min), dBdsx, Clock Slips, Frame Slips
VF	Frequency (100 Hz to 3000 Hz, ± 3 Hz), Power (-40.0 dBm to +3.0 dBm, ± 0.2 dBm)
Status (Historical and Current)	Rx (Signal, Frame Sync, Pattern Sync), DS1 (Alarms, Errors, B8ZS)
Status (Current)	Tx (Alarm On, Error On, Loop On)

Setup

BERT Display	Table, Histogram, Event List, Clear History
VF	Tx (Off/On), Channel (1-24), Tx Freq, Tx Level (-30 dBm to 0 dBm), Volume, Audio, Clear
Line Code	AMI, B8ZS
Tx Clock	Internal (1.544 MHz ± 5 ppm), Recovered, External
Tx LBO	0.0 dB, -7.5 dB, -15.0 dB
Rx Input	Terminate (Bantam connector 100 Ω balanced), Monitor (Connect via 20 dB pad in DSX, 20 dB flat gain) Bridge ($\geq 1000 \Omega$, -36 dB to +6 dB)
Framing	ESF, SF-D4
Payload	T1 (1.544 Mbps), Fractional T1 (Nx64, 64, 56, 16, 8 kbps)
Pulse Shapes	Conform to ANSI T1.403 and ITU G.703
Patterns	QRSS, PRBS (2-9, 2-11, 2-15, 2-20, 2-23), All Ones, All Zeros, 1-in-8 (1-in-7), 2-in-8, 3-in-24 T1 Daly, Six User defined (≤ 32 bits), Inverse Patterns (On/Off), Remote Loop Up/Down
Loop Codes	CSU, NIU, Link Type (In-Band, Data-Link), Self Loop Up/Down, Loop Code User Defined
Error Insertion	Bit Error, Bit Error Rate (BER), BPV, Frame Bit Error, Error (On/Off)
Alarm Insertion	AIS On/Off (Blue Alarm), RAI On/Off (Yellow Alarm)
Data Log	1 minute to 3 days

E1 Bit-Error-Rate Tester (BERT) (Option 0052)

Measurements

Error Detection	Frame Bits, Bit Errors, BER, BPV, CRC, E Bits
Error Analysis (ITU G-821)	Errored Seconds (ES), Error Free Seconds (EFS), Severely Errored Seconds (SES), Unavailable Seconds (UAS), Available Seconds (AS), Degraded Minutes (DGRM)
Rx Signal	Frequency (± 5 ppm, Max/Min), Vpp ($\pm 5\%$) (Max/Min), dBdsx, Clock Slips, Frame Slips
VF	Frequency (100 Hz to 3000 Hz), Power (-40.0 dBm to +3.0 dBm, ± 0.2 dBm)
Status (Historical and Current)	Rx (Signal, FAS, Pattern Sync), E1 (Alarms, Errors)
Status (Current)	Tx (Alarm On, Error On)

Setup

BERT Display	Table, Histogram, Event List, Clear History
VF	Tx (Off/On), Channel (1-31), Tx Freq, Tx Level (-30 dBm to 0 dBm), Volume, Audio, Clear
Line Code	AMI, HDB3
Tx Clock	Internal (2.048 MHz ± 5 ppm), Recovered, External
Rx Input	Terminate (RJ48 120/75 Ω balanced, BNC 75 Ω unbalanced, -43 dB to +6 dB) Bridge ($\geq 1000 \Omega$, -43 dB to +6 dB) Monitor (Connect via 20 dB pad in DSX, 20 dB flat gain)
Framing	PCM30, PCM30 CRC-4, PCM31, PCM31 CRC-4
Payload	E1 (2.048 Mbps), Fractional E1 (N x 64, 64, 16, 8 kbps)
Pulse Shapes	Conform to ITU G.703
Patterns	QRSS, PRBS (2-9, 2-11, 2-15, 2-20, 2-23), All Ones, All Zeros, 1010, 1-in-8 (1-in-7), 2-in-8, 3-in-24, Six User defined (≤ 32 bits), Inverse Patterns (On/Off)
Loopback Mode	Self loop
Error Insertion	Bit Error, Bit Error Rate (BER), Frame Bit Error, Error (On/Off)
Alarm Insertion	AIS (On/Off) (Blue Alarm), RAI (On/Off) (Yellow Alarm)
Data Log	1 minute to 3 days

Cell Master™ MT8212E, MT8213E Base Station Analyzer Specifications



Backhaul Analyzers (Options 0051, 0052, 0053)

T3 Bit-Error-Rate Tester (BERT) (Option 0053)

Measurements

Error Detection	Frame Bits, Bit Errors, BER, BPV, Lof Count, P-bit Errors, C-bit Errors, FEBE Errors
Error Analysis (ITU G-821)	Excess Zeros, Errored Seconds (ES), Error Free Seconds (EFS), Severely Errored Seconds (SES), Unavailable Seconds (UAS), Available Seconds (AS), Degraded Minutes (DGRM), Pattern Loss Seconds (PATLS)
Rx Signal	Frequency (± 5 ppm, Max/Min), Vpp ($\pm 5\%$) (Max/Min), dBdsx
VF	Frequency (100 Hz to 3000 Hz, ± 3 Hz), Power (-30.0 dBm to +0.0 dBm, ± 0.2 dBm)
Status (Historical and Current)	Rx (Signal, Frame Sync, Pattern Sync), DS3 (Alarms, Errors, DS3ZS)
Status (Current)	Insert (Alarm On, Error On, Loop On)

Setup

BERT Display	Table, Histogram, Event List, Clear History
VF	Tx (Off/On), Channel #, Tx Freq, Tx, Level, Volume, Audio (On/Off)
Line Code	AMI, B3ZS
Tx Clock	Internal (44.736 MHz ± 5 ppm), Recovered
Tx LBO	Low, DSX
Rx Input	DSX3 (Bantam connector 100 Ω balanced) Monitor (Connect via 20 dB pad in DSX)
Framing	M13, C-Bit, Unframed
Test Mode	Auto, DS3, DS1
Pulse Shapes	Carrier present, Frame ID and Sync, Pattern ID and Sync
Patterns	QRSS, PRBS (2-9, 2-11, 2-15, 2-20, 2-23), All Ones, All Zeros, 1010, 1-in-8 (1-in-7), 2-in-8, 3-in-24 T1 Daly, Six User defined (≤ 32 bits), Inverse Patterns (On/Off), Loop Up/Down
Loop Codes	Stuff Bit, DS3 C-Bit FEAC, DS3 Self Loop
Error Insertion	Bit Error, BPV, DS3 Frame Bit Error, C-bit, P-bit, FEBE, Error Insert (On/Off)
Alarm Insertion	AIS (Blue Alarm), RAI (Yellow Alarm), Idle Alarm, Alarm (On/Off)
Data Log	1 minute to 3 days

DS1 Test Mode

Measurements

Error Detection	Frame Bits, Bit Errors, BER, BPV, CRC, PATLS
Error Analysis (ITU G-821)	Errored Seconds (ES), Error Free Seconds (EFS), Severely Errored Seconds (SES), Unavailable Seconds (UAS), Available Seconds (AS), Degraded Minutes (DGRM)
Rx Signal	Frequency (± 5 ppm, Max/Min), Vpp ($\pm 5\%$) (Max/Min), dBdsx, Clock Slips, Frame Slips
VF	Frequency (100 Hz to 3000 Hz, ± 3 Hz), Power (-40.0 dBm to +3.0 dBm, ± 0.2 dBm)
Status (Historical and Current)	Rx (Signal, Frame Sync, Pattern Sync), DS1 (Alarms, Errors, B8ZS)
Status (Current)	Tx (Alarm On, Error On, Loop On)

Setup

BERT Display	Table, Histogram, Event List, Clear History
VF	Tx (Off/On), Channel (1-24), Tx Freq, Tx Level (-30 dBm to 0 dBm), Volume, Audio, Clear
Line Code	AMI, B8ZS
Tx Clock	Internal (1.544 MHz ± 5 ppm), Recovered, External
Tx LBO	0.0 dB, -7.5 dB, -15.0 dB
Rx Input	Terminate (Bantam connector 100 Ω balanced) Monitor (Connect via 20 dB pad in DSX, 20 dB flat gain) Bridge ($\geq 1000 \Omega$, -36 dB to +6 dB)
Framing	ESF, SF-D4
Payload	T1 (1.544 Mbps), Fractional T1 (Nx64, 64, 56, 16, 8 kbps)
Pulse Shapes	Conform to ANSI T1.403 and ITU G.703
Patterns	QRSS, PRBS (2-9, 2-11, 2-15, 2-20, 2-23), All Ones, All Zeros, 1-in-8 (1-in-7), 2-in-8, 3-in-24 T1 Daly, Six User defined (≤ 32 bits), Inverse Patterns (On/Off), Remote Loop Up/Down
Loopback Mode	CSU, NIU, Link Type (In-Band, Data-Link), Self Loop Up/Down, Loop Code User Defined
Error Insertion	Bit Error, Bit Error Rate (BER), BPV, Frame Bit Error, Error (On/Off)
Alarm Insertion	AIS On/Off (Blue Alarm), RAI On/Off (Yellow Alarm)
Data Log	1 minute to 3 days

Cell Master™ MT8212E, MT8213E Base Station Analyzer Specifications

General Specifications

All specifications and characteristics apply under the following conditions, unless otherwise stated: 1) After 5 minutes of warm-up time, where the instrument is left in the ON state; 2) All specifications apply when using internal reference; 3) All specifications subject to change without notice; 4) Typical performance is the measured performance of an average unit; 5) Recommended calibration cycle is 12 months.

Setup Parameters

System	Status (Temperature, Battery Info, Serial Number, Firmware Version, Options Installed) Self Test, Application Self Test GPS (see Option 0031)
System Options	Name, Date and Time, Brightness, Volume Language (English, French, German, Spanish, Chinese, Japanese, Korean, Italian, User defined) Reset (Factory Defaults, Master Reset, Update Firmware)
File	Save, Recall, Delete, Directory Management
Save/Recall	Setups, Measurements, Screen Shots Jpeg (save only)
Delete	Selected File, All Measurements, All Mode Files, All Content
Directory Management	Sort Method (Name/Type/Date), Ascend/Descend, Internal/USB, Copy, Format USB
Internal Trace/Setup Memory	2,000 traces, 2,000 setups
External Trace/Setup Memory	Limited by size of USB Flash drive
Mode Switching	Auto-Stores/Recalls most recently used Setup Parameters in the Mode

Connectors

RF Out	Type N, female, 50 Ω (Reflection In)
RF Out Damage Level	23 dBm, ± 50 VDC
RF In	Type N, female, 50 Ω
RF Input Damage Level	+35 dBm peak, ± 50 VDC, Maximum Continuous Input (≥ 10 dB attenuation)
GPS	SMA(f)
T1	Bantam Jacks
T3	BNC connectors
E1	RJ48C
External Power	5.5 mm barrel connector, 12.5 VDC to 15 VDC, < 4.0 Amps
USB Interface (2)	Type A (Connect USB Flash Drive and Power Sensor)
USB Interface	5-pin mini-B, Connect to PC for data transfer and/or remote control
Headset Jack	2.5 mm mini-phone plug
External Reference In	BNC, female, 50 Ω, Maximum Input +10 dBm 1 MHz, 5 MHz, 10 MHz, 13 MHz
External Trigger/Clock Recovery	BNC, female, 50 Ω, Maximum Input ± 50 VDC

Display

Type	Resistive Touchscreen
Size	8.4 in. daylight viewable color LCD
Resolution	800 x 600

Battery

Type	Li-Ion
Battery Operation	3 hours, typical

Electromagnetic Compatibility

European Union	CE Mark, EMC Directive 2004/108/EC Low Voltage Directive 2006/95/EC
Australia and New Zealand	C-tick N274
Interference	EN 61326-1
Emissions	EN 55011
Immunity	EN 61000-4-2/-4-3/-4-4/-4-5/-4-6/-4-11

Safety

Safety Class	EN 61010-1 Class 1
Product Safety	IEC 60950-1 when used with Anritsu Company supplied Power Supply

Environmental

Operating Temperature	-10 °C to 55 °C
Maximum Humidity	95% RH (none condensing) at 40 °C
Shock	MIL-PRF-28800F Class 2
Storage	-40 °C to 71 °C
Altitude	4600 meters, operating and non-operating

ESD

RF Port Center Pin	Withstands up to ± 15 kV
--------------------	--------------------------

Size and Weight

Size	273 mm x 199 mm x 91 mm, (10.7 in x 7.8 in x 3.6 in)
Weight	3.71 kg, (8.2 lbs)

Cell Master™ MT8212E, MT8213E Base Station Analyzer Specifications

Master Software Tools (for your PC)

Database Management

Full Trace Retrieval	Retrieve all traces from instrument into one PC directory
Trace Catalog	Index all traces into one catalog
Trace Rename Utility	Rename measurement traces
Group Edit	Titles, subtitles, plot scaling, markers and limit lines, simultaneously on similar files
DAT File Converter	Converts HHST files to MST file format and vice-versa

Data Analysis

Trace Math and Smoothing	Compare multiple traces
Data Converter	Convert from/to Return Loss, VSWR, Cable Loss, DTF and also into Smith Charts
Measurement Calculator	Translates into other units

Report Generation

Report Generator	Includes GPS, power level, and calibration status along with measurements
Edit Graph	Change scale, limit lines, and markers
Report Format	Create reports in HTML for PDF format
Export Measurements	Export measurements to *.s2p, *.jpg or *.csv format
Notes	Annotate measurements

Mapping (GPS Required)

Spectrum Analyzer Mode	MapInfo, MapPoint
Mobile WiMAX OTA Option	Google Earth, Google Maps, MapInfo

Folder Spectrogram (Spectrum Monitoring for Interference Analysis and Spectrum Clearing)

Folder Spectrogram – 2D View	Creates a composite file of multiple traces Peak Power, Total Power, Peak Frequency, Histogram, Average Power (Max/Min) File Filter (Violations over limit lines or deviations from averages) Playback
Video Folder Spectrogram – 2D View	Create AVI file to export for management review/reports
Folder Spectrogram – 3D View	Views (Set Threshold, Markers) - 3D (Rotate X, Y, Z Axis, Level Scale, Signal ID) - 2D View (Frequency or Time Domain, Signal ID) - Top Down Playback (Frequency and/or Time Domain)

List/Parameter Editors

Traces	Add, delete, and modify limit lines and markers
Antennas, Cables, Signal Standards	Modify instrument's Antenna, Cable, and Signal Standard List
Product Updates	Auto-checks Anritsu website for latest revision firmware
Firmware Upload	Upload new firmware into the instrument
Pass/Fail	Create, download, or edit Signal Analysis Pass/Fail Limits
VSG Pattern Converter	Import user-defined patterns (ASCII text or MATLAB file format required)
Languages	Add up to two languages and modify non-English language menus
Mobile WiMAX	DL-MAP Parameters
Display	Modify display settings

Script Master™

Channel Scanner Mode	Automate scan up to 1200 channels, repeat for sets of 20 channels, repeat all channels
GSM/GPRS/EDGE or W-CDMA/HSDPA Mode	Automate Signal Analysis testing requirements with annotated how-to pictures

Connectivity

Connections	Connect to PC using USB, LAN, or Direct Ethernet connection
Download	Download measurements and live traces to PC for storage and analysis
Upload	Upload measurements from PC to instrument
Firmware Updates	Create USB Flash Drive for firmware update

Cell Master™ MT8212E, MT8213E Base Station Analyzer Specifications

Ordering Information



MT8212E
2 MHz to 4 GHz
100 kHz to 4 GHz
10 MHz to 4 GHz

Options

MT8212E-0021
MT8212E-0010

MT8212E-0031
MT8212E-0019

MT8212E-0025
MT8212E-0027

MT8212E-0431

MT8212E-0090

MT8212E-0028

MT8212E-0040

MT8212E-0041

MT8212E-0044

MT8212E-0045

MT8212E-0065

MT8212E-0035

MT8212E-0060

MT8212E-0061

MT8212E-0038

MT8212E-0541

MT8212E-0542

MT8212E-0546

MT8212E-0042

MT8212E-0043

MT8212E-0033

MT8212E-0062

MT8212E-0063

MT8212E-0034

MT8212E-0046

MT8212E-0047

MT8212E-0066

MT8212E-0067

MT8212E-0037

MT8212E-0030

MT8212E-0032

MT8212E-0051

MT8212E-0052

MT8212E-0053

MT8212E-0098

MT8212E-0099

MT8213E
2 MHz to 6 GHz
100 kHz to 6 GHz
10 MHz to 6 GHz

Options

MT8213E-0021
MT8213E-0010

MT8213E-0031
MT8213E-0019

MT8213E-0025
MT8213E-0027

MT8213E-0431

MT8213E-0090

MT8213E-0028

MT8213E-0040

MT8213E-0041

MT8213E-0044

MT8213E-0045

MT8213E-0065

MT8213E-0035

MT8213E-0060

MT8213E-0061

MT8213E-0038

MT8213E-0541

MT8213E-0542

MT8213E-0546

MT8213E-0042

MT8213E-0043

MT8213E-0033

MT8213E-0062

MT8213E-0063

MT8213E-0034

MT8213E-0046

MT8213E-0047

MT8213E-0066

MT8213E-0067

MT8213E-0037

MT8213E-0030

MT8213E-0032

MT8213E-0051

MT8213E-0052

MT8213E-0053

MT8213E-0098

MT8213E-0099

Description

Cable and Antenna Analyzer

Spectrum Analyzer

Power Meter

2-Port Transmission Measurement

Bias-Tee

GPS Receiver (Requires Antenna P/N 2000-1528-R)

High-Accuracy Power Meter***

Interference Analyzer*

Channel Scanner

Coverage Mapping*

Gated Sweep

C/W Signal Generator (Requires CW Signal Generator Kit, P/N 69793)

GSM/GPRS/EDGE RF Measurements

GSM/GPRS/EDGE Demodulation

W-CDMA/HSDPA RF Measurements

W-CDMA Demodulation

W-CDMA/HSDPA Demodulation

W-CDMA/HSDPA Over-the-Air Measurements*

TD-SCDMA/HSDPA Measurements

TD-SCDMA/HSDPA Demodulation

TD-SCDMA/HSDPA Over-the-Air Measurements

LTE RF Measurements*

LTE Modulation Measurement*

LTE Over-the-Air Measurements*

cdmaOne/CDMA2000 1X RF Measurements

cdmaOne/CDMA2000 1X Demodulation

cdmaOne/CDMA2000 1X Over-the-Air Measurements*

CDMA2000 1xEV-DO RF Measurements

CDMA2000 1xEV-DO Demodulation

CDMA2000 1xEV-DO Over-the-Air Measurements*

IEEE 802.16 Fixed WiMAX RF Measurements

IEEE 802.16 Fixed WiMAX Demodulation

IEEE 802.16 Mobile WiMAX RF Measurements

IEEE 802.16 Mobile WiMAX Demodulation

IEEE 802.16 Mobile WiMAX Over-the-Air Measurements

ISDB-T Digital Video Measurements

ISDB-T SFN Measurements

T1 Analyzer**

E1 Analyzer**

T3/T1 Analyzer**

Standard Calibration (ANSI Z540-1-1994)

Premium Calibration (ANSI Z540-1-1994 plus test data)

*Requires Option 0031, **Mutually exclusive,

***Requires External Power Sensor


Cell Master™ MT8212E, MT8213E Base Station Analyzer Specifications

Power Sensors (For complete ordering information see the respective datasheets of each sensor)




Part Number	Description
PSN50	High Accuracy RF Power Sensor, 50 MHz to 6 GHz, +20 dBm
MA24104A	Inline High Power Sensor, 600 MHz to 4 GHz, +51.76 dBm
MA24106A	High Accuracy RF Power Sensor, 50 MHz to 6 GHz, +23 dBm
MA24108A	Microwave USB Power Sensor, 10 MHz to 8 GHz, +20 dBm
MA24118A	Microwave USB Power Sensor, 10 MHz to 18 GHz, +20 dBm
MA24126A	Microwave USB Power Sensor, 10 MHz to 26 GHz, +20 dBm

Manuals (soft copy included on MST CD and at www.anritsu.com)

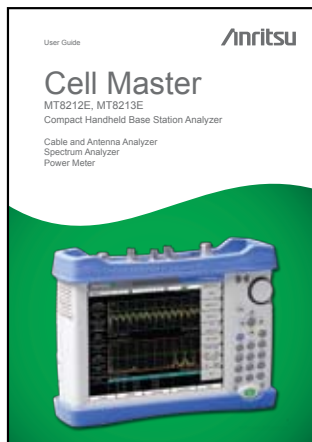

Part Number	Description
10580-00250	Cell Master Instrument User Guide (Hard copy included) - Bias-Tee, GPS Receiver
10580-00241	Cable and Antenna Analyzer Measurement Guide
10580-00242	2-Port Transmission Measurement - Bias-Tee
10580-00231	Spectrum Analyzer Measurement Guide - Interference Analyzer, Channel Scanner, Gated Sweep, CW Signal Generator, AM/FM/PM Analyzer, Interference Mapping, Coverage Mapping
10580-00240	Power Meter Measurement Guide - High Accuracy Power Meter
10580-00234	3GPP Signal Analyzer Measurement Guide - GSM/EDGE, W-CDMA/HSDPA, TD-SCDMA/HSDPA, LTE
10580-00235	3GPP2 Signal Analyzer Measurement Guide - CDMA, EV-DO
10580-00236	WiMAX Signal Analyzer Measurement Guide - Fixed WiMAX, Mobile WiMAX
10580-00237	Digital TV Measurement Guide - DVB-T/H, ISDB-T
10580-00238	Backhaul Analyzer Measurement Guide - T1, E1, T3/T1
10580-00215	ODTF-1 Optical Distance-to-Fault Module
10580-00256	Programming Manual

Troubleshooting Guides (soft copy included on MST CD and at www.anritsu.com)



11410-00473	Cable, Antenna and Components
11410-00551	Spectrum Analyzers
11410-00472	Interference
11410-00566	LTE eNode Testing
11410-00466	GSM/GPRS/EDGE Base Stations
11410-00463	W-CDMA/HSDPA Base Stations
11410-00465	TD-SCDMA/HSDPA Base Stations
11410-00467	cdmaOne/CDMA2000 1X Base Stations
11410-00468	CDMA2000 1xEV-DO Base Stations
11410-00470	Fixed WiMAX Base Stations
11410-00469	Mobile WiMAX Base Stations
11410-00552	T1/DS1 Backhaul Testing
11410-00553	E1 Backhaul Testing

Standard Accessories (included with instrument)



10580-00250	Cell Master User Guide (includes Bias-Tee, GPS Receiver)
3-68736	Soft Carrying Case
2300-498	MST CD: Master Software Tools, User/Measurement Guides, Programming Manual, Troubleshooting Guides, Application Notes
633-44	Rechargeable Li-Ion Battery
40-168-R	AC-DC Adapter
806-141-R	Automotive Cigarette Lighter 12 VDC Adapter
3-2000-1498	USB A/5-pin mini-B Cable, 10 feet/305 cm
11410-00485	Cell Master™ MT8212E/MT8213E Technical Data Sheet One Year Warranty (Including battery, firmware, and software) Certificate of Calibration and Conformance

Cell Master™ MT8212E, MT8213E Base Station Analyzer Specifications

Optional Accessories

Calibration Components, 50 Ω



Part Number	Description
ICN50B	InstaCal™ Calibration Module, 38 dB, 2 MHz to 6.0 GHz, N(m), 50 Ω
OSLN50-1	Precision Open/Short/Load, N(m), 42 dB, 6.0 GHz, 50 Ω
OSLNF50-1	Precision Open/Short/Load, N(f), 42 dB, 6.0 GHz, 50 Ω
2000-1618-R	Precision Open/Short/Load, 7/16 DIN(m), DC to 4.0 GHz 50 Ω
2000-1619-R	Precision Open/Short/Load, 7/16 DIN(f), DC to 4.0 GHz 50 Ω
22N50	Open/Short, N(m), DC to 18 GHz, 50 Ω
22NF50	Open/Short, N(f), DC to 18 GHz, 50 Ω
SM/PL-1	Precision Load, N(m), 42 dB, 6.0 GHz
SM/PLNF-1	Precision Load, N(f), 42 dB, 6.0 GHz

Calibration Components, 75 Ω



22N75	Open/Short, N(m), DC to 3 GHz, 75 Ω
22NF75	Open/Short, N(f), DC to 3 GHz, 75 Ω
26N75A	Precision Termination, N(m), DC to 3 GHz, 75 Ω
26NF75A	Precision Termination, N(f), DC to 3 GHz, 75 Ω
12N50-75B	Matching Pad, DC to 3 GHz, 50 Ω to 75 Ω

Phase-Stable Test Port Cables, Armored w/ Reinforced Grip (recommended for cable & antenna line sweep applications)



15RNFN50-1.5-R	1.5 m, DC to 6 GHz, N(m) to N(f), 50 Ω
15RDFN50-1.5-R	1.5 m, DC to 6 GHz, N(m) to 7/16 DIN(f), 50 Ω
15RDN50-1.5-R	1.5 m, DC to 6 GHz, N(m) to 7/16 DIN(m), 50 Ω
15RNFN50-3.0-R	3.0 m, DC to 6 GHz, N(m) to N(f), 50 Ω
15RDFN50-3.0-R	3.0 m, DC to 6 GHz, N(m) to 7/16 DIN(f), 50 Ω
15RDN50-3.0-R	3.0 m, DC to 6 GHz, N(m) to 7/16 DIN(m), 50 Ω

InterChangeable Adaptor Phase Stable Test Port Cables, Armored w/Reinforced Grip (recommended for cable and antenna line sweep applications. It uses the same ruggedized grip as the Reinforced grip series cables. Now you can also change the adaptor interface on the grip to four different connector types)



15RCN50-1.5-R	1.5 m, DC to 6 GHz, N(m), N(f), 7/16 DIN(m), 7/16 DIN(f), 50 Ω
15RCN50-3.0-R	3.0 m, DC to 6 GHz, N(m), N(f), 7/16 DIN(m), 7/16 DIN(f), 50 Ω

Phase-Stable Test Port Cables, Armored (ideal for use with tightly spaced connectors and other general use applications)



15NNF50-1.5C	1.5 m, DC to 6 GHz, N(m) to N(f), 50 Ω
15NN50-1.5C	1.5 m, DC to 6 GHz, N(m) to N(m), 50 Ω
15NDF50-1.5C	1.5 m, DC to 6 GHz, N(m) to 7/16 DIN(f), 50 Ω
15ND50-1.5C	1.5 m, DC to 6 GHz, N(m) to 7/16 DIN(m), 50 Ω
15NNF50-3.0C	3.0 m, DC to 6 GHz, N(m) to N(f), 50 Ω
15NN50-3.0C	3.0 m, DC to 6 GHz, N(m) to N(m), 50 Ω

Adapters



1091-26-R	SMA(m) to N(m), DC to 18 GHz, 50 Ω
1091-27-R	SMA(f) to N(m), DC to 18 GHz, 50 Ω
1091-80-R	SMA(m) to N(f), DC to 18 GHz, 50 Ω
1091-81-R	SMA(f) to N(f), DC to 18 GHz, 50 Ω
1091-172	BNC(f) to N(m), DC to 1.3 GHz, 50 Ω
510-90	7/16 DIN(f) to N(m), DC to 7.5 GHz, 50 Ω
510-91	7/16 DIN(f) to N(f), DC to 7.5 GHz, 50 Ω
510-92	7/16 DIN(m) to N(m), DC to 7.5 GHz, 50 Ω
510-93	7/16 DIN(m) to N(f), DC to 7.5 GHz, 50 Ω
510-96	7/16 DIN(m) to 7/16 DIN (m), DC to 7.5 GHz, 50 Ω
510-97	7/16 DIN(f) to 7/16 DIN (f), DC to 7.5 GHz, 50 Ω
1091-379-R	7/16 DIN(f) to 7/16 DIN(f), DC to 6 GHz, 50 Ω, w/ Reinforced Grip
510-102-R	N(m) to N(m), DC to 11 GHz, 50 Ω, 90 degrees right angle

Cell Master™ MT8212E, MT8213E Base Station Analyzer Specifications

Optional Accessories (continued)

Precision Adapters



34NN50A
34NFNF50

Precision Adapter, N(m) to N(m), DC to 18 GHz, 50 Ω
Precision Adapter, N(f) to N(f), DC to 18 GHz, 50 Ω

Miscellaneous Accessories




2000-1528-R GPS Antenna, SMA(m)
69793 CW Signal Generator Kit
ODTF-1 Optical Distance-to-Fault Module, 1550 nm, Single Mode
2000-1520-R 2 GB USB Flash Drive
2000-1374 External Charger for Li-Ion Batteries
2300-532 Map Master CD

Backpack and Transit Case



67135 Anritsu Backpack (For Handheld Instrument and PC)
760-243-R Large Transit Case with Wheels and Handle

Directional Antennas



2000-1411-R 822 MHz to 900 MHz, N(f), 10 dBd, Yagi
2000-1412-R 885 MHz to 975 MHz, N(f), 10 dBd, Yagi
2000-1413-R 1710 MHz to 1880 MHz, N(f), 10 dBd, Yagi
2000-1414-R 1850 MHz to 1990 MHz, N(f), 9.3 dBd, Yagi
2000-1415-R 2400 MHz to 2500 MHz, N(f), 10 dBd, Yagi
2000-1416-R 1920 MHz to 2170 MHz, N(f), 10 dBd, Yagi
2000-1519 500 MHz to 3 GHz, log periodic

Portable Antennas



2000-1200-R 806 MHz to 866 MHz, SMA(m), 50 Ω
2000-1473-R 870 MHz to 960 MHz, SMA(m), 50 Ω
2000-1035-R 896 MHz to 941 MHz, SMA(m), 50 Ω (1/4 wave)
2000-1030-R 1710 MHz to 1880 MHz, SMA(m), 50 Ω (1/2 wave)
2000-1474-R 1710 MHz to 1880 MHz with knuckle elbow (1/2 wave)
2000-1031-R 1850 MHz to 1990 MHz, SMA(m), 50 Ω (1/2 wave)
2000-1475-R 1920 MHz to 1980 MHz and 2110 to 2170 MHz, SMA(m), 50 Ω
2000-1032-R 2400 MHz to 2500 MHz, SMA(m), 50 Ω (1/2 wave)
2000-1361-R 2400 MHz to 2500 MHz, 5000 MHz to 6000 MHz, SMA(m), 50 Ω
2000-1636-R Antenna Kit (Consists of: 2000-1030-R, 2000-1031-R, 2000-1032-R, 2000-1200-R, 2000-1035-R, 2000-1361-R, and carrying pouch)

Cell Master™ MT8212E, MT8213E Base Station Analyzer Specifications

Optional Accessories (continued)

Filters



1030-114-R	806 MHz to 869 MHz, N(m) to SMA(f), 50 Ω
1030-109-R	824 MHz to 849 MHz, N(m) to SMA(f), 50 Ω
1030-110-R	880 MHz to 915 MHz, N(m) to SMA(f), 50 Ω
1030-105-R	890 MHz to 915 MHz Band, 0.41 dB loss, N(m) to SMA(f), 50 Ω
1030-111-R	1850 MHz to 1910 MHz, N(m) to SMA(f), 50 Ω
1030-106-R	1710 MHz to 1790 MHz Band, 0.34 dB loss, N(m) to SMA(f), 50 Ω
1030-107-R	1910 MHz to 1990 MHz Band, 0.41 dB loss, N(m) to SMA(f), 50 Ω
1030-112-R	2400 MHz to 2484 MHz, N(m) to SMA(f), 50 Ω
1030-149-R	High Pass, 150 MHz, N(m) to N(f), 50 Ω
1030-150-R	High Pass, 400 MHz, N(m) to N(f), 50 Ω
1030-151-R	High Pass, 700 MHz, N(m) to N(f), 50 Ω
1030-152-R	Low Pass, 200 MHz, N(m) to N(f), 50 Ω
1030-153-R	Low Pass, 550 MHz, N(m) to N(f), 50 Ω
1030-155-R	2500 MHz to 2700 MHz, N(m) to N(f), 50 Ω

Attenuators



3-1010-122	20 dB, 5 W, DC to 12.4 GHz, N(m) to N(f)
42N50-20	20 dB, 5 W, DC to 18 GHz, N(m) to N(f)
42N50A-30	30 dB, 5 W, DC to 18 GHz, N(m) to N(f)
3-1010-123	30 dB, 50 W, DC to 8.5 GHz, N(m) to N(f)
1010-127-R	30 dB, 150 W, DC to 3 GHz, N(m) to N(f)
3-1010-124	40 dB, 100 W, DC to 8.5 GHz, N(m) to N(f), Uni-directional
1010-121	40 dB, 100 W, DC to 18 GHz, N(m) to N(f), Uni-directional
1010-128-R	40 dB, 150 W, DC to 3 GHz, N(m) to N(f)

T1/E1 Extender Cables

806-16-R	Bantam Plug to Bantam Plug
3-806-116	Bantam Plug to BNC
3-806-117	Bantam "Y" Plug to RJ48
3-806-169	72 inch (1.8 m) BNC to BNC, 75 1/2 RG59 Type Coax Cable
806-176-R	Bantam Plug to Alligator Clips



The Master Users Group is an organization dedicated to providing training, technical support, networking opportunities and links to Master product development teams. As a member you will receive the Insite Quarterly Newsletter with user stories, measurement tips, new product news and more.

Visit us to register today: www.anritsu.us/smiusignup



To receive a quote to purchase a product or order accessories visit our online ordering site: www.ShopAnritsu.com

Training at Anritsu

Anritsu has designed courses to help you stay up to date with technologies important to your job.

For available training courses visit: www.anritsu.com/training



Anritsu Corporation

5-1-1 Onna, Atsugi-shi, Kanagawa, 243-8555 Japan
Phone: +81-46-223-1111
Fax: +81-46-296-1238

• U.S.A.

Anritsu Company

1155 East Collins Boulevard, Suite 100,
Richardson, TX, 75081 U.S.A.
Toll Free: 1-800-ANRITSU (267-4878)
Phone: +1-972-644-1777
Fax: +1-972-671-1877

• Canada

Anritsu Electronics Ltd.

700 Silver Seven Road, Suite 120, Kanata,
Ontario K2V 1C3, Canada
Phone: +1-613-591-2003
Fax: +1-613-591-1006

• Brazil

Anritsu Eletrônica Ltda.

Praça Amadeu Amaral, 27 - 1 Andar
01327-010 - Bela Vista - São Paulo - SP - Brasil
Phone: +55-11-3283-2511
Fax: +55-11-3288-6940

• Mexico

Anritsu Company, S.A. de C.V.

Av. Ejército Nacional No. 579 Piso 9, Col. Granada
11520 México, D.F., México
Phone: +52-55-1101-2370
Fax: +52-55-5254-3147

• U.K.

Anritsu EMEA Ltd.

200 Capability Green, Luton, Bedfordshire LU1 3LU, U.K.
Phone: +44-1582-433280
Fax: +44-1582-731303

• France

Anritsu S.A.

12 Avenue du Québec,
Bâtiment Iris 1-Silic 638,
91140 VILLEBON SUR YVETTE, France
Phone: +33-1-60-92-15-50
Fax: +33-1-64-46-10-65

• Germany

Anritsu GmbH

Nemetschek Haus, Konrad-Zuse-Platz 1
81829 München, Germany
Phone: +49 (0) 89 442308-0
Fax: +49 (0) 89 442308-55

• Italy

Anritsu S.p.A.

Via Elio Vittorini, 129, 00144 Roma, Italy
Phone: +39-06-509-9711
Fax: +39-06-502-2425

• Sweden

Anritsu AB

Borgarfjordsgatan 13, 164 40 KISTA, Sweden
Phone: +46-8-534-707-00
Fax: +46-8-534-707-30

• Finland

Anritsu AB

Teknobulevardi 3-5, FI-01530 VANTAA, Finland
Phone: +358-20-741-8100
Fax: +358-20-741-8111

• Denmark

Anritsu A/S (for Service Assurance)

Anritsu AB (for Test & Measurement)

Kirkebjerg Allé 90 DK-2605 Brøndby, Denmark
Phone: +45-7211-2200
Fax: +45-7211-2210

• Russia

Anritsu EMEA Ltd.

Representation Office in Russia

Tverskaya str. 16/2, bld. 1, 7th floor.
Russia, 125009, Moscow
Phone: +7-495-363-1694
Fax: +7-495-935-8962

• United Arab Emirates

Anritsu EMEA Ltd.

Dubai Liaison Office

P O Box 500413 - Dubai Internet City
Al Thuraya Building, Tower 1, Suite 701, 7th Floor
Dubai, United Arab Emirates
Phone: +971-4-3670352
Fax: +971-4-3688460

• Singapore

Anritsu Pte. Ltd.

60 Alexandra Terrace, #02-08, The Comtech (Lobby A)
Singapore 118502
Phone: +65-6282-2400
Fax: +65-6282-2533

• India

Anritsu Pte. Ltd.

India Branch Office

3rd Floor, Shri Lakshminarayan Niwas, #2726, 80 ft Road,
HAL 3rd Stage, Bangalore - 560 075, India
Phone: +91-80-4058-1300
Fax: +91-80-4058-1301

• P. R. China (Hong Kong)

Anritsu Company Ltd.

Units 4 & 5, 28th Floor, Greenfield Tower, Concordia Plaza,
No. 1 Science Museum Road, Tsim Sha Tsui East,
Kowloon, Hong Kong, P.R. China
Phone: +852-2301-4980
Fax: +852-2301-3545

• P. R. China (Beijing)

Anritsu Company Ltd.

Beijing Representative Office

Room 2008, Beijing Fortune Building,
No. 5, Dong-San-Huan Bei Road,
Chao-Yang District, Beijing 100004, P.R. China
Phone: +86-10-6590-9230
Fax: +86-10-6590-9235

• Korea

Anritsu Corporation, Ltd.

8F Hyunjuk Bldg. 832-41, Yeoksam-Dong,
Kangnam-ku, Seoul, 135-080, Korea
Phone: +82-2-553-6603
Fax: +82-2-553-6604

• Australia

Anritsu Pty Ltd.

Unit 21/270 Ferntree Gully Road, Notting Hill
Victoria, 3168, Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

• Taiwan

Anritsu Company Inc.

7F, No. 316, Sec. 1, Neihu Rd., Taipei 114, Taiwan
Phone: +886-2-8751-1816
Fax: +886-2-8751-1817

