


OIM-400

Optical Inspection Microscope



Key features

- LED illumination provides 100,000 hours of lamp life and extends the battery life for up to 30 hours of continuous use
- Laser safety filter installed
- Precision optics at 400×
- Versatile interface uses interchangeable, pre-centered, universal or dedicated adapters
- Clear, bright images
- Smooth focus control
- Push button on/off switch
- Ergonomic design and rubber eye cup for comfortable use

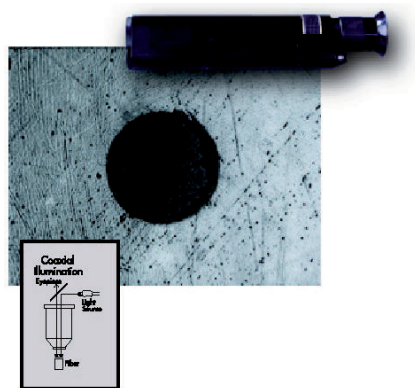


Applications

The JDSU OIM-400 Optical Inspection Microscope uses a white LED for coaxial illumination. Light is introduced into the optical path (axis) so that it emerges at the tip of the objective and strikes the sample perpendicular to the fiber end face. It produces excellent detail of scratches and contamination and may be used for critical examination of polish quality.

Lighting method

Coaxial illumination is most commonly found in professional grade microscopes and is the system preferred by most critical users.

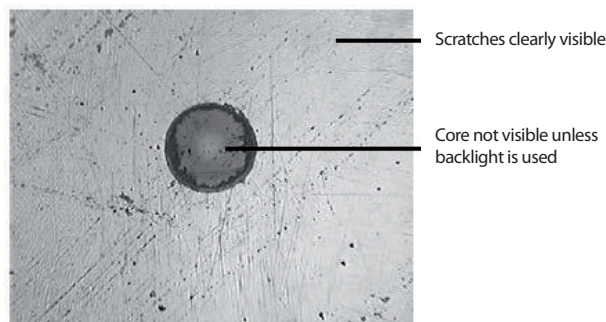



Specifications

Optical magnification	400×
Power	Three "AAA" alkaline cells
LED rated life	100 000 h
Weight	0.5 kg/1.2 lb
Size (l × d)	222 × 32 (in mm)/8.75 × 1.25 (in inches)
Controls	Push button on/off switch Fine-focus control
Safety filter	Built-in
Adapter interface	User-interchangeable pre-centered universal or dedicated adapters

Ordering information

BN 2255/90.08	OIM-400 Optical Inspection Microscope 400× Fiber Microscope with universal "slip-grip" adapter, soft-sided carrying case and three "AAA" alkaline batteries delivered with:
---------------	--

Useful accessories

BN 2255/96.21	User manual, English
BN 2255/90.09	Universal push/pull adapter 1.25 mm
BN 2255/90.11	Universal adapter 2.5 mm, APC type

All statements, technical information and recommendations related to the products herein are based upon information believed to be reliable or accurate. However, the accuracy or completeness thereof is not guaranteed, and no responsibility is assumed for any inaccuracies. The user assumes all risks and liability whatsoever in connection with the use of a product or its applications. JDSU reserves the right to change at any time without notice the design, specifications, function, fit or form of its products described herein, including withdrawal at any time of a product offered for sale herein. JDSU makes no representations that the products herein are free from any intellectual property claims of others. Please contact JDSU for more information. JDSU and the JDSU logo are trademarks of JDS Uniphase Corporation. Other trademarks are the property of their respective holders. © 2005 JDS Uniphase Corporation. All rights reserved. 30137216 000 0707 OIM400.DS.FOP.TM.AE

Test & Measurement Regional Sales

NORTH AMERICA TEL: 1 866 228 3762 FAX: +1 301 353 9216	LATIN AMERICA TEL:+55 11 5503 3800 FAX:+55 11 5505 1598	ASIA PACIFIC TEL:+852 2892 0990 FAX:+852 2892 0770	EMEA TEL:+49 7121 86 2222 FAX:+49 7121 86 1222	WEBSITE: www.jdsu.com
---	--	---	---	--