



Technical Data Sheet

# Spectrum Master™

## High Performance Handheld Spectrum Analyzer

MS2726C

9 kHz to 43 GHz

### Introduction


Anritsu's high performance handheld spectrum analyzer provides the wireless professional the performance needed for the most demanding measurements in harsh RF and physical environments. Whether it is for spectrum monitoring, broadcast proofing, interference analysis, RF and microwave measurements, regulatory compliance, or Wi-Fi and wireless network measurements, the Spectrum Master is the ideal instrument to making fast and reliable measurements.

#### Spectrum and Interference Analyzer Highlights

- Measure: Occupied Bandwidth, Channel Power, ACPR, C/I
- Interference Analyzer: Spectrogram, Signal Strength, RSSI
- Dynamic Range: > 104 dB in 1 Hz RBW
- DANL: -160 dBm in 1 Hz RBW
- Phase Noise: -100 dBc/Hz @ 10 kHz offset at 1 GHz
- Frequency Accuracy: ± 25 ppb with GPS On
- 1 Hz to 10 MHz Resolution Bandwidth (RBW)
- Traces: Normal, Max Hold, Min Hold, Average, # of Averages
- Detectors: Peak, Negative, Sample, Quasi-peak, and true RMS
- Markers: 6, each with a Delta Marker, or 1 Reference with 6 Deltas
- Limit Lines: up to 40 segments with one-button envelope creation
- Trace Save-on-Event: crossing limit line or sweep complete

#### Capabilities and Functional Highlights

- LTE, GSM/EDGE
- W-CDMA/HSDPA
- TD-SCDMA/HSDPA
- CDMA, EV-DO
- WiMAX - Fixed, Mobile
- AM/FM/SSB Demodulator
- Zero-span IF Output
- GPS tagging of stored traces
- Internal Preamp standard
- High Accuracy Power Meter
- 4, 6, 8, 18, 26 GHz USB Sensors
- Channel Scanner
- 8.4 inch Display
- < 5 minute warm-up time
- 2.5 hour battery operation time
- Ethernet/USB Data Transfer
- MST Remote Access Tool

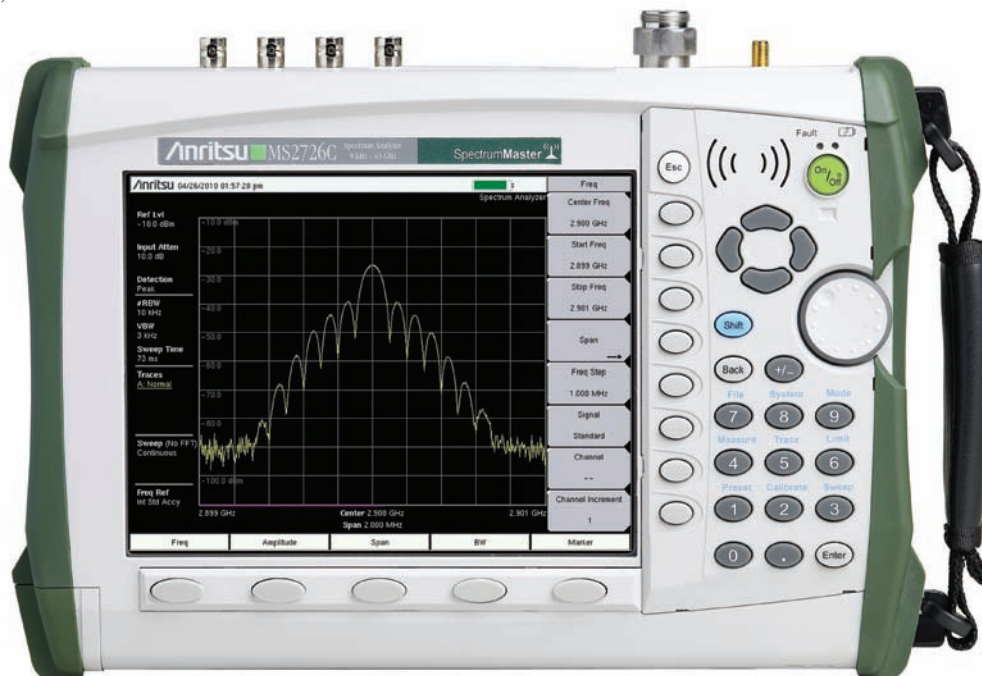

Spectrum Master™ MS2726C Spectrum Analyzer

Handheld Size: 315 mm x 211 mm x 77 mm (12.4 in x 8.3 in x 3.0 in), Lightweight: 3.8 kg (8.5 lbs)

# Spectrum Master™ MS2726C Spectrum Analyzer Specifications



## Spectrum Analyzer

### Measurements

Smart Measurements	Field Strength (uses antenna calibration tables to measure dBm/m <sup>2</sup> or dBmV/m) Occupied Bandwidth (measures 99% to 1% power channel of a signal) Channel Power (measures the total power in a specified bandwidth) ACPR (adjacent channel power ratio) AM/FM/SSB Demodulation (wide/narrow FM, upper/lower SSB), (audio out only) C/I (carrier-to-interference ratio) Emission Mask (recall limit lines as emission mask)
--------------------	---

### Setup Parameters

Frequency	Center/Start/Stop, Span, Frequency Step, Signal Standard, Channel #
Amplitude	Reference Level (RL), Scale, Attenuation Auto/Level, RL Offset, Pre-Amp On/Off, Detection
Span	Span, Span Up/Down (1-2-5), Full Span, Zero Span, Last Span
Bandwidth	RBW, Auto RBW, VBW, Auto VBW, RBW/VBW, Span/RBW
File	Save, Recall, Delete, Directory Management
Save/Recall	Setups, Measurements, Limit Lines, Screen Shots Jpeg (save only), Save-on-Event
Save-on-Event	Crossing Limit Line, Sweep Complete, Save-then-Stop, Clear All
Delete	Selected File, All Measurements, All Mode Files, All Content
Directory Management	Sort Method (Name/Type/Date), Ascend/Descend, Internal/USB, Copy
Application Options	Impedance (50 Ω, 75 Ω, Other)

### Sweep Functions

Sweep	Single/Continuous, Manual Trigger, Reset, Detection, Minimum Sweep Time, Trigger Type
Sweep Mode	Fast, Performance, No FFT
Detection	Peak, RMS/Avg, Negative, Sample, Quasi-peak
Triggers	Free Run, External, Video, Delay, Level, Slope, Hysteresis, Holdoff, Force Trigger Once

### Trace Functions

Traces	Up to three Traces (A, B, C), View/Blank, Write/Hold, Trace A/B/C Operations
Trace A Operations	Normal, Max Hold, Min Hold, Average, # of Averages, (always the live trace)
Trace B Operations	A → B, B ↔ C, Max Hold, Min Hold
Trace C Operations	A → C, B ↔ C, Max Hold, Min Hold, A – B → C, B – A → C, Relative Reference (dB), Scale

### Marker Functions

Markers	Markers 1-6 each with a Delta Marker, or Marker 1 Reference with Six Delta Markers, Marker Table (On/Off/Large), All Markers Off
Marker Types	Style (Fixed/Tracking), Noise Marker, Frequency Counter Marker
Marker Auto-Position	Peak Search, Next Peak (Right/Left), Peak Threshold %, Set Marker to Channel, Marker Frequency to Center, Delta Marker to Span, Marker to Reference Level
Marker Table	1-6 markers frequency and amplitude plus delta markers frequency offset and amplitude

### Limit Line Functions

Limit Lines	Upper/Lower, On/Off, Edit, Move, Envelope, Advanced, Limit Alarm, Default Limit
Limit Line Edit	Frequency, Amplitude, Add Point, Add Vertical, Delete Point, Next Point Left/Right
Limit Line Move	To Current Center Frequency, By dB or Hz, To Marker 1, Offset from Marker 1
Limit Line Envelope	Create Envelope, Update Amplitude, Number of Points (41), Offset, Shape Square/Slope
Limit Line Advanced	Type (Absolute/Relative), Mirror, Save/Recall

### Frequency

Frequency Range	9 kHz to 43 GHz (usable to 0 Hz), Preamp 100 kHz to 43 GHz
Tuning Resolution	1 Hz
Frequency Reference	Aging: ± 1.0 ppm/10 years Accuracy: ± 0.3 ppm (25 °C ± 25 °C) + aging
External Reference Frequencies	1, 1.2288, 1.544, 2.048, 2.4576, 4.8, 4.9152, 5, 9.8304, 10, 13, 19.6608 MHz
Frequency Span	10 Hz to 43 GHz including zero span
Sweep Time	10 μs to 600 seconds in zero span
Sweep Time Accuracy	± 2% in zero span

### Bandwidth

Resolution Bandwidth (RBW)	1 Hz to 10 MHz in 1–3 sequence ± 10% (–3 dB bandwidth)
Video Bandwidth (VBW)	1 Hz to 10 MHz in 1–3 sequence (–3 dB bandwidth)
RBW with Quasi-Peak Detection	200 Hz, 9 KHz, 120 kHz (–6 dB bandwidth)
VBW with Quasi-Peak Detection	Auto VBW is On, RBW/VBW = 1

## Spectrum Master™ MS2726C Spectrum Analyzer Specifications



### Spectrum Analyzer (continued)

<b>Spectral Purity</b>	
SSB Phase Noise at 1 GHz	-100 dBc/Hz @ 10 kHz offset from carrier (-104 dBc/Hz typical) -102 dBc/Hz @ 100 kHz offset from carrier (-107 dBc/Hz typical) -107 dBc/Hz @ 1 MHz offset from carrier (-114 dBc/Hz typical) -120 dBc/Hz @ 10 MHz offset from carrier (-129 dBc/Hz typical)
<b>Amplitude Ranges</b>	
Dynamic Range	> 104 dB @ 2.4 GHz, 2/3 (TOI-DANL) in 1 Hz RBW
Measurement Range	DANL to +30 dBm
Display Range	1 dB to 15 dB/div in 1 dB steps, ten divisions displayed
Reference Level Range	-120 dBm to +30 dBm
Attenuator Resolution	0 dB to 65 dB, 5 dB steps
Amplitude Units	Log Scale Modes: dBm, dBV, dBmv, dBµV Linear Scale Modes: nV, µV, mV, V, kV, nW, µW, mW, W, kW
Maximum Continuous Input	+30 dBm Peak, ± 50 VDC (≥ 10 dB Attn) +23 dBm Peak, ± 50 VDC (< 10 dB Attn) +13 dBm Peak, ± 50 VDC (Preamp On)
<b>Amplitude Accuracy</b> (single sine wave input < Ref level, and > DANL, auto attenuation)	
20 °C to 30 °C after 30 minute warm-up	Typical: ± 0.5 dB, 100 kHz to 40 GHz Maximum: ± 1.3 dB, 100 kHz to 20 GHz, Add ± 1.0 dB, 20 GHz to 40 GHz
-10 °C to 40 °C after 60 minute warm-up	Add ± 1.0 dB, 100 kHz to 32 GHz Add ± 2.0 dB, 32 GHz to 40 GHz
<b>Displayed Average Noise Level (DANL)</b> (RMS detection, VBW/Avg type = Log., Ref Level = -20 dBm for preamp Off and -50 dBm for preamp On)	
(DANL in 1 Hz RBW, 0 dB attenuation)	Preamp Off
10 MHz to 4 GHz	-141 dBm
> 4 GHz to 9 GHz	-134 dBm
> 9 GHz to 13 GHz	-129 dBm
> 13 GHz to 20 GHz	-123 dBm
> 20 to 32 GHz	-134 dBm
> 32 GHz to 40 GHz	-127 dBm
	Preamp On
10 MHz to 4 GHz	-160 dBm
> 4 GHz to 9 GHz	-156 dBm
> 9 GHz to 13 GHz	-152 dBm
> 13 GHz to 20 GHz	-145 dBm
> 20 GHz to 32 GHz	-154 dBm
> 32 GHz to 40 GHz	-147 dBm
<b>Spurs</b>	
Residual Spurs	Preamp Off (RF input terminated, 0 dB input attenuation) -90 dBm 9 kHz to 13 GHz, -85 dBm 13 GHz to 20 GHz, -80 dBm 20 GHz to 43 GHz Preamp On (RF input terminated, 0 dB input attenuation) -100 dBm 1 MHz to 32 GHz, -95 dBm 32 GHz to 43 GHz
Input-Related Spurs	(0 dB attenuation, -30 dBm input, span < 1.7 GHz) -60 dBc, -70 dBc typical
<b>Third-Order Intercept (TOI)</b> (-20 dBm tones 100 kHz apart, -20 dBm Ref level, 0 dB input attenuation, preamp Off)	
2.4 GHz	+15 dBm
50 MHz to 20 GHz	+20 dBm typical
20 GHz to 32 GHz	+15 dBm typical
32 GHz to 43 GHz	+20 dBm typical
<b>P1dB</b>	
< 4 GHz	+5 dBm typical
4 GHz to 20 GHz	+12 dBm typical
20 GHz to 32 GHz	+7 dBm typical
32 GHz to 43 GHz	+12 dBm typical
<b>Second Harmonic Distortion</b>	
50 MHz	-54 dBc
< 4 GHz	-60 dBc typical
> 4 GHz	-75 dBc typical
<b>VSWR</b>	
> 10 dB input attenuation	
< 20 GHz	1.5:1 typical
> 20 GHz to 43 GHz	2.0:1 typical

## Spectrum Master™ MS2726C Spectrum Analyzer Specifications

### GPS Receiver Option (Option 0031)

Setup	On/Off, Antenna Voltage 3.3/5.0 V, GPS Info
GPS Time/Location Indicator	Time, Latitude, Longitude and Altitude on display Time, Latitude, Longitude and Altitude with trace storage
High Frequency Accuracy when GPS Antenna is connected	Spectrum Analyzer, Interference Analyzer, Signal Analyzers < ± 25 ppb with GPS On, 3 minutes after satellite lock in selected mode
GPS Lock – after antenna is disconnected	< ± 50 ppb for 3 days, 0 °C to 50 °C ambient temperature
Connector	SMA, Female

### Secure Data Option (Option 0007)

For highly secure data handling requirements, this software option prevents the storing of measurement setup or data information onto any internal file storage location. Instead, setup and measurement information is stored ONLY to the external USB memory location. A simple factory preset prepares the Spectrum Master for transportation while the USB memory remains behind in the secure environment. The Spectrum Master cannot be switched between secure and non-secure operation by the user once configured for secure data operation.



### High Accuracy Power Meter (Option 0019) (Requires external USB Power Sensor(s))

Amplitude	Maximum, Minimum, Offset, Relative On/Off, Units, Auto Scale			
Average	# of Running Averages, Max Hold			
Zero/Cal	Zero On/Off, Cal Factor (Center Frequency, Signal Standard)			
Limits	Limit On/Off, Limit Upper/Lower			

Power Sensor Model	PSN50	MA24104A	MA24106A	MA24108/18/26A
Description	High Accuracy RF Power Sensor	Inline High Power Sensor	High Accuracy RF Power Sensor	Microwave USB Power Sensor
Frequency Range	50 MHz to 6 GHz	600 MHz to 4 GHz	50 MHz to 6 GHz	10 MHz to 8 GHz (MA24108A) 10 MHz to 18 GHz (MA24118A) 10 MHz to 26 GHz (MA24126A)
Connector	Type N(m), 50 Ω	Type N(m), 50 Ω	Type N(m), 50 Ω	Type N(m), 50 Ω (MA24108/18A) Type K(m), 50 Ω (MA24126A)
Dynamic Range	-30 dBm to +20 dBm (0.001 mW to 100 mW)	+3 dBm to +51.76 dBm (2 mW to 150 W)	-40 dBm to +23 dBm (0.1 μW to 200 mW)	-40 dBm to +20 dBm (0.1 μW to 100 mW)
VBW	100 Hz	100 Hz	100 Hz	50 kHz
Measurands	True-RMS	True-RMS	True-RMS	True-RMS, Slot Power, Burst Average Power
Measurement Uncertainty	± 0.16 dB <sup>1</sup>	± 0.17 dB <sup>2</sup>	± 0.16 dB <sup>1</sup>	± 0.18 dB <sup>3</sup>
Datasheet (for complete specifications)	11410-00414	11410-00483	11410-00424	11410-00504

- Notes:
- 1) Total RSS measurement uncertainty (0 °C to 50 °C) for power measurements of a CW signal greater than -20 dBm with zero mismatch errors.
  - 2) Expanded uncertainty with K=2 for power measurements of a CW signal greater than +20 dBm with a matched load. Measurement results referenced to the input side of the sensor.
  - 3) Expanded uncertainty with K=2 for power measurements of a CW signal greater than -20 dBm with zero mismatch errors.

## Spectrum Master™ MS2726C Spectrum Analyzer Specifications



### Interference Analyzer (Option 0025)

Measurements	Spectrum Field Strength Occupied Bandwidth Channel Power Adjacent Channel Power (ACPR) AM/FM/SSB Demodulation (Wide/Narrow FM, Upper/Lower SSB), (audio out only) Carrier-to-Interference ratio (C/I) Spectrogram (Collect data up to 72 hours) Signal Strength (Gives visual and aural indication of signal strength) Received Signal Strength Indicator (RSSI) (collect data up to one week) Gives visual and aural indication of signal strength Signal ID (up to 12 signals) Center Frequency Bandwidth Signal Type (FM, GSM, W-CDMA, CDMA, Wi-Fi) Closest Channel Number Number of Carriers Signal-to-Noise Ratio (SNR) > 10 dB Interference Mapping Save current point location and direction Save/Recall points/map Delete last saved point Delete all points Speaker on/off Volume Reset Max/Min hold
Application Options	Impedance (50 Ω, 75 Ω, Other)



### Channel Scanner (Option 0027)

Number of Channels	1 to 20 Channels (Power Levels)
Measurements	Graph/Table, Max Hold (On/5 sec/Off), Frequency/Channel, Current/Maximum, Dual Color
Scanner	Scan Channels, Scan Frequencies, Scan Customer List, Scan Script Master™
Amplitude	Reference Level, Scale
Custom Scan	Signal Standard, Channel, # of Channels, Channel Step Size, Custom Scan
Frequency Range	9 kHz to 43 GHz
Frequency Accuracy	± 10 Hz + Time base error
Measurement Range	-110 dBm to +30 dBm
Application Options	Impedance (50 Ω, 75 Ω, Other)

### Zero Span IF Output (Option 0089)

Mode	Spectrum Analyzer/Span/Zero Span
Center Frequency	140 MHz
Output Level	-40 dBm to -20 dBm typical For a signal at Reference Level: -43 dBm to +30 dBm (Preamp Off) or -60 dBm to -40 dBm (Preamp On)
IF Bandwidths	Up to 30 MHz (3 dB bandwidth)
RF Attenuation	Auto
Connector	BNC female

## Spectrum Master™ MS2726C Spectrum Analyzer Specifications



### GSM/GPRS/EDGE Signal Analyzers (Options 0040, 0041)

#### Measurements

RF (Option 0040)	Demodulation (Option 0041)	Over-the-Air (OTA)	Pass/Fail (User Editable)
Channel Spectrum	Phase Error	RF Measurements and	Measurements
Channel Power	EVM	Demodulation can be made OTA.	Channel Power
Occupied Bandwidth	Origin Offset		Occupied Bandwidth
Burst Power	C/I	There are no additional OTA	Burst Power
Average Burst Power	Modulation Type	Measurements.	Average Burst power
Frequency Error	Magnitude Error		Frequency Error
Modulation Type	BSIC (NCC, BCC)		Phase Error
BSIC (NCC, BCC)			EVM
Multi-channel Spectrum			Origin Offset
Power vs. Time (Frame/Slot)			C/I
Channel Power			Magnitude Error
Occupied Bandwidth			Script Master™
Burst Power			
Average Burst Power			
Frequency Error			
Modulation Type			
BSIC (NCC, BCC)			

#### Setup Parameters

GSM/EDGE Select	Auto, GSM, EDGE
Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
Amplitude	Power Offset, Auto Range, Adjust Range
Sweep	Single/Continuous, Trigger Sweep
Save/Recall	Setup, Measurement, Screen Shot (save only), to Internal/External Memory
Measurement Summary Screen	Overall Measurements

#### RF Measurements (Option 0040)

Frequency Error	± 10 Hz + time base error, 99% confidence level
Occupied Bandwidth	Bandwidth within which 99% of the power transmitted on a single channel lies
Burst Power Error	± 1.5 dB, ± 1 dB typical, (-50 dBm to +20 dBm)

#### Demodulation (Option 0041)

GSMK Modulation Quality (RMS Phase)	
Measurement Accuracy	± 1 deg
Residual Error (GSMK)	1 deg
8 PSK Modulation Quality (EVM)	
Measurement Accuracy	± 1.5%
Residual Error (8 PSK)	2.5%

## Spectrum Master™ MS2726C Spectrum Analyzer Specifications



### W-CDMA/HSDPA Signal Analyzers (Options 0044, 0045 or 0065, 0035)

Measurements			
RF (Option 0044)	Demodulation (Option 0045 or 0065)	Over-the-Air (OTA) (Option 0035)	Pass/Fail (User Editable)
Band Spectrum Channel Spectrum Channel Power Occupied Bandwidth Peak-to-Average Power Spectral Emission Mask Single carrier ACLR Multi-carrier ACLR RF Summary	Code Domain Power Graph P-CPICH Power Channel Power Noise Floor EVM Carrier Feed Through Peak Code Domain Error Carrier Frequency Frequency Error Control Channel Power Abs/Rel/Delta Power CPICH, P-CCPCH S-CCPCH, PICH P-SCH, S-SCH HSDPA Power vs. Time Constellation Code Domain Power Table Code, Status EVM, Modulation Type Power, Code Utilization Power Amplifier Capacity Codogram Modulation Summary	Scrambling Code Scanner (Six) Scrambling Codes CPICH $E_c/I_o$ $E_c$ Pilot Dominance OTA Total Power Multipath Scanner (Six) Six Multipaths Tau Distance RSCP Relative Power Multipath Power	Measurements Max Output Power Frequency Error EVM CPICH Occupied Bandwidth Spectral Mask ACLR PCDE P-CCPCH S-CCPCH Code Spread 3 PICH Code 128 Script Master™ Test Models 1 (16), (32), (64) 2 3 (16), (32) 4 (+CPICH), (-CPICH) 5 (2 HS), (4 HS), (8 HS)
<b>Setup Parameters</b>			
Scrambling Code, Threshold	Auto, Manual		
User Selectable	Scrambling Code, S-CCPCH Spread, S-CCPCH Code, PICH Code, Threshold, Max Amp Power, CPICH Power, Frequency Error Average		
Maximum Spreading Factor	256, 512		
Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel		
Amplitude	Scale/Division, Power Offset, Auto Range, Adjust Range, Units (dBm/Watts)		
Marker	Six Markers, Table On/Off		
Sweep	Single/Continuous, Trigger Sweep		
Save/Recall	Setup, Measurement, Screen Shot (save only), to Internal/External Memory		
Measurement Summary Screens	Overall Measurements, RF Measurements, Signal Quality Measurements		
<b>RF Measurements (Option 0044)</b>			
RF Channel Power Accuracy	$\pm 1.25$ dB, $\pm 0.7$ dB typical, (temperature range 15 °C to 35 °C)		
Occupied Bandwidth Accuracy	$\pm 100$ kHz		
Adjacent Channel Leakage Ratio (ACLR)	-54 dB/-59 dB $\pm 0.8$ dB @ 5 MHz/10 MHz offset, typical, Bands I – VI, VIII – XIV, XVII -54 dB/-57 dB $\pm 1.0$ dB @ 5 MHz/10 MHz offset, typical, Band VII		
<b>Demodulation (Option 0045 for W-CDMA only or 0065 for W-CDMA and HSDPA)</b>			
W-CDMA Modulations	QPSK, QPSK-DTX (Codecs: AMR 4.75, 5.9, 7.4, 12.2 kbps, DTX 7.4, 12,2 kbps)		
HSDPA Modulations	QPSK, 16 QAM, 64 QAM		
EVM Accuracy	$\pm 2.5\%$ , $6\% \leq \text{EVM} \leq 25\%$		
Residual EVM	2.5% typical		
Code Domain Power	$\pm 0.5$ dB for code channel power $> -25$ dB, 16, 32, 64 DCPH (test model 1), 16, 32 DCPH (test model 2, 3)		
CPICH (dBm) Accuracy	$\pm 0.8$ dB typical		
<b>Over-the-Air (OTA) Measurements (Option 0035)</b>			
Scrambling Code Scanner	Six strongest Scrambling Codes		
Multipath Scanner	Multipath power of six signals relative to strongest pilot		

## Spectrum Master™ MS2726C Spectrum Analyzer Specifications



### cdmaOne/CDMA2000 1X Signal Analyzers (Option 0042, 0043, 0033)

#### Measurements

RF (Option 0042)	Demodulation (Option 0043)	Over-the-Air (OTA) (Option 0033)	Pass/Fail (User Editable)
Channel Spectrum Channel Power Occupied Bandwidth Peak-to-Average Power Spectral Emission Mask Multi-carrier ACPR RF Summary	Code Domain Power Graph Pilot Power Channel Power Noise Floor Rho Carrier Feed Through Tau RMS Phase Error Frequency Error Abs/Rel/ Power Pilot Page Sync Q Page Code Domain Power Table Code Status Power Multiple Codes Code Utilization Modulation Summary	Pilot Scanner (Nine) PN $E_c/I_o$ Tau Pilot Power Channel Power Pilot Dominance Multipath Scanner (Six) $E_c/I_o$ Tau Channel Power Multipath Power Limit Test – 10 Tests Averaged Rho Adjusted Rho Multipath Pilot Dominance Pilot Power Pass/Fail Status	Measurements Channel Power Occupied Bandwidth Peak-to-Average Power Spectral Mask Test Frequency Error Channel Frequency Frequency error Pilot Power Noise Floor Rho Carrier Feed Through Tau RMS Phase Error Code Utilization Measured PN Pilot Dominance Multipath Power

#### Setup Parameters

PN Setup	PN Trigger (No Trigger, GPS, External), PN Search Type (Auto, Manual), PN Offset
Walsh Codes	64, 128
Measurement Speed	Fast, Normal, Slow
External Trigger Polarity	Rising, Falling
Number of Carriers	1 to 5
Carrier Bandwidth	1.23, 1.24, 1.25 MHz
Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
Amplitude	Scale/Division, Power Offset, Auto Range, Adjust Range, Units (dBm/Watts)
Sweep	Single/Continuous, Trigger Sweep
Save/Recall	Setup, Measurement, Screen Shot (save only), to Internal/External Memory
Measurement Summary Screens	Overall Measurements, RF Measurements, Signal Quality Measurements

#### RF Measurements (Option 0042)

RF Channel Power Accuracy	$\pm 1.5$ dB, $\pm 1.0$ dB typical, (RF input $-50$ dBm to $+20$ dBm)
---------------------------	---

#### Demodulation (Option 0043)

Frequency Error	$\pm 10$ Hz + time base error, 99% confidence level (in slow mode)
Rho Accuracy	$\pm 0.005$ , for Rho $> 0.9$
Residual Rho	$> 0.995$ , typical, $> 0.99$ maximum, (RF input $-50$ dBm to $+20$ dBm)
PN Offset	1 x 64 chips
Pilot Power Accuracy	$\pm 1.0$ dB typical, relative to channel power
Tau	$\pm 0.5$ $\mu$ s typical, $\pm 1.0$ $\mu$ s maximum

#### Over-the-Air (OTA) Measurements (Option 0033)

Pilot Scanner	Nine strongest pilots
Multipath Scanner	Multipath power of six signals relative to strongest pilot
Limit Test	Average of ten tests compared to limit



## Spectrum Master™ MS2726C Spectrum Analyzer Specifications



### CDMA2000 1xEV-DO Signal Analyzers (Option 0062, 0063, 0034)

Measurements			
RF (Option 0062)	Demodulation (Option 0063)	Over-the-Air (OTA) (Option 0034)	Pass/Fail (User Editable)
Channel Spectrum Channel Power Occupied Bandwidth Peak-to-Average Power Power vs. Time Pilot & MAC Power Channel Power Frequency Error Idle Activity On/Off Ratio Spectral Emission Mask Multi-carrier ACPR RF Summary	MAC Code Domain Power Graph Pilot & MAC Power Channel Power Frequency Error Rho Pilot Rho Overall Data Modulation Noise Floor MAC Code Domain Power Table Code Status Power Code Utilization Data Code Domain Power Active Data Power Data Modulation Rho Pilot Rho Overall Maximum Data CDP Minimum Data CDP Modulation Summary	Pilot Scanner (Nine) PN $E_c/I_0$ Tau Pilot Power Channel Power Pilot Dominance Multipath Scanner (Six) $E_c/I_0$ Tau Channel Power Multipath Power	Measurements Channel Power Occupied Bandwidth Peak-to-Average Power Carrier Frequency Frequency Error Spectral Mask Noise Floor Pilot Power RMS Phase Error Tau Code Utilization Measured PN Pilot Dominance Multipath Power

#### Setup Parameters

PN Setup	PN Trigger (No Trigger, GPS, External), PN Search Type (Auto, Manual), PN Offset
Walsh Codes	64, 128
Measurement Speed	Fast, Normal, Slow
External Trigger Polarity	Rising, Falling
Slot Type	Auto, Active, Idle
Number of Carriers	1 to 5
Carrier Bandwidth	1.23, 1.24, 1.25 MHz
Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
Amplitude	Scale/Division, Power Offset, Auto Range, Adjust Range, Units (dBm/Watts)
Sweep	Single/Continuous, Trigger Sweep
Save/Recall	Setup, Measurement, Screen Shot (save only), to Internal/External Memory
Measurement Summary Screens	Overall Measurements, RF Measurements, Signal Quality Measurements

#### RF Measurements (Option 0062)

RF Channel Power Accuracy	$\pm 1.5$ dB, $\pm 1.0$ dB typical, (RF input $-50$ dBm to $+20$ dBm)
---------------------------	---

#### Demodulation (Option 0063)

EV-DO Compatibility	Rev 0 and Rev A
Frequency Error	$\pm 20$ Hz + time base error, 99% confidence level
Rho Accuracy	$\pm 0.01$ , for Rho $> 0.9$
Residual Rho	$> 0.995$ typical, $> 0.99$ , maximum (RF input $-50$ dBm to $+20$ dBm)
PN Offset	Within $1 \times 64$ chips
Pilot Power Accuracy	$\pm 1.0$ dB typical, relative to channel power
Tau	$\pm 0.5$ $\mu$ s typical, $\pm 1.0$ $\mu$ s maximum

#### Over-the-Air (OTA) Measurements (Option 0034)

Pilot Scanner	Nine strongest pilots
Multipath Scanner	Multipath power of six signals relative to strongest pilot

# Spectrum Master™ MS2726C Spectrum Analyzer Specifications



## LTE Signal Analyzers (Options 0541, 0542, 0543, 0546)

### Measurements

RF (Option 0541)	Modulation (Option 0542)	Over-the-Air (OTA) (Option 0546)	Pass/Fail (User Editable)
Channel Spectrum Channel Power Occupied Bandwidth ACPR RF Summary	Constellation Reference Signal Power Sync Signal Power EVM Frequency Error Carrier Frequency Cell ID Sector ID Group ID Control Channel Power RS P-SS S-SS PBCH PCFICH Modulation Summary	Synch Signal Power (Six Strongest) Power Cell ID Sector ID Group ID Dominance	Pass Fail All Pass/Fail RF Pass Fail Demod Measurements Channel Power Occupied Bandwidth ACLR Frequency Error Carrier Frequency Dominance EVM (peak) EVM (rms) RS Power SS Power P-SS Power S-SS Power PBCH Power PCFICH Power Cell ID Group ID Sector ID

### Setup Parameters

Bandwidth	10 MHz
Span	1.4, 3, 5, 10, 15, 20, 30 MHz
Frame Length	2.5, 5.0, 10.0 msec
Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
Amplitude	Scale/Division, Power Offset, Auto Range, Adjust Range
Sweep	Single/Continuous, Trigger Sweep
Save/Recall	Setup, Measurement, Screen Shot (save only), to Internal/External Memory
Measurement Summary Screens	Overall Measurements, RF Measurements, Signal Quality Measurements

### RF Measurements (Option 0541)

RF Channel Power Accuracy	± 1.5 dB, ± 1.0 dB typical, (RF input -50 dBm to +10 dBm)
---------------------------	---

### Modulation (Option 0542)

Frequency Error	± 10 Hz + time base error, 99% confidence level
Residual EVM (rms)	2.5% typical (E-UTRA Test Model 3.1) (RF Input -50 dBm to +10 dBm)

### Bandwidth = 15 MHz, 20 MHz (Option 0543) (Requires Option 0541 or 0542)

Bandwidths	15 MHz, 20 MHz
------------	----------------

### Over-the-Air (OTA) Measurements (Option 0546)

Scanner	Six strongest Sync Signals
Auto Save	Yes
GPS Tagging and Logging	Yes

## Spectrum Master™ MS2726C Spectrum Analyzer Specifications



### Fixed and Mobile WiMAX Signal Analyzers (Options 0046, 0047, 0066, 0067, 0037)

Measurements			
RF (Option 0046 - Fixed) (Option 0066 - Mobile)	Demodulation (Option 0047 - Fixed) (Option 0067 - Mobile)	Over-the-Air (OTA) (Option 0037 - Mobile)	Pass/Fail (User Editable)
Channel Spectrum	Constellation	Channel Power Monitor	Pass Fail All
Channel Power	RCE (RMS/Peak)	Preamble Scanner (Six)	Pass/Fail RF
Occupied Bandwidth	EVM (RMS/Peak)	Preamble	Pass Fail Demod
Power vs. Time	Frequency Error	Relative Power	Measurements
Channel Power	CINR	Cell ID	Channel Power
Preamble Power	Base Station ID	Sector ID	Occupied Bandwidth
Downlink Burst Power (Mobile)	Sector ID	PCINR	Downlink Bust Power
Uplink Burst Power (Mobile)	Spectral Flatness	Dominant Preamble	Uplink Burst Power
Data Burst Power (Fixed)	Adjacent Subcarrier Flatness	Base Station ID	Preamble Power
Crest Factor (Fixed)	EVM vs. Subcarrier/Symbol		Crest Factor
ACPR	RCE (RMS/Peak)		Frequency Error
RF Summary	EVM (RMS/Peak)		Carrier Frequency
	Frequency Error		EVM
	CINR (Mobile)		RCE
	Base Station ID		Sector ID (Mobile)
	Sector ID (Mobile)		
	DL-MAP (Tree View) (Mobile)		
	Modulation Summary		

#### Setup Parameters

Fixed WiMAX Bandwidth	1.25, 1.50, 2.50, 3.50, 5.00, 5.50, 6.00, 7.00, 10.00 MHz
Fixed WiMAX Cyclic Prefix Ratio (CP)	1/4, 1/8, 1/16, 1/32
Fixed WiMAX Span	5, 10, 15, 20 MHz
Fixed WiMAX Frame Length	2.5, 5.0, 10.0 msec
Mobile WiMAX Zone Type	PUSC
Mobile WiMAX DL-MAP Auto Decoding	Convolutional Coding (CC), Convolutional Turbo Coding (CTC)
Mobile WiMAX Bandwidths	3.50, 5.00, 7.00, 8.75, 10.00 MHz
Mobile WiMAX Cyclic Prefix Ratio (CP)	1/8
Mobile WiMAX Span	5, 10, 20, 30 MHz
Mobile WiMAX Frame Lengths	5, 10 msec
Mobile WiMAX Demodulation	Auto, Manual, FCH
Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
Amplitude	Scale/Division, Power Offset, Auto Range, Adjust Range
Sweep	Single/Continuous, Trigger Sweep
Save/Recall	Setup, Measurement, Screen Shot (save only), to Internal/External Memory
Measurement Summary Screens	Overall Measurements, RF Measurements, Signal Quality Measurements

#### RF Measurements (Option 0046 – Fixed, Option 0066 - Mobile)

RF Channel Power Accuracy	± 1.5 dB, ± 1.0 dB typical, (RF input –50 dBm to +20 dBm)
---------------------------	---

#### Demodulated Signal Analyzer (Option 0047 – Fixed, Option 0067 – Mobile)

Frequency Error	± 10 Hz + time base error, 99% confidence level
Fixed WiMAX Residual EVM (rms)	3% typical, 3.5% maximum (RF Input –50 dBm to +20 dBm)
Mobile WiMAX Residual EVM (rms)	2.5% typical, 3.0% maximum, (RF Input –50 dBm to +20 dBm)

#### Over-the-Air (OTA) Measurements (Option 0037)

Channel Power Monitor	Over time (one week), measurement time interval 1 to 60 sec
Preamble Scanner	Six Strongest Preambles
Auto Save	Yes
GPS Tagging and Logging	Yes

# Spectrum Master™ MS2726C Spectrum Analyzer Specifications



## TD-SCDMA/HSDPA Signal Analyzers (Options 0060, 0061, 0038)

### Measurements

RF (Option 0060)	Demodulation (Option 0061)	Over-the-Air (OTA) (Option 0038)	Pass/Fail (User Editable)
Channel Spectrum Channel Power Occupied Bandwidth Left Channel Power Left Channel Occ B/W Right Channel Power Right Channel Occ B/W Power vs. Time Six Slot Powers Channel Power (RRC) DL-UL Delta Power UpPTS Power DwPTS Power On/Off Ratio Slot Peak-to-Average Power Spectral Emission RF Summary	Code Domain Power/Error (QPSK/8 PSK/16 QAM) Slot Power DwPTS Power Noise Floor Frequency Error Tau Scrambling Code EVM Peak EVM Peak Code Domain Error CDP Marker Modulation Summary	Code Scan (32) Scrambling Code Group Tau E <sub>c</sub> /I <sub>0</sub> Pilot Dominance Tau Scan (Six) Sync-DL# Tau E <sub>c</sub> /I <sub>0</sub> DwPTS Power Pilot Dominance Record Run/Hold	Pass Fail All Pass/Fail RF Pass Fail Demod Measurements Occupied Bandwidth Channel Power Channel Power RCC On/Off Ratio Peak-to-Average Ratio Frequency Error EVM Peak EVM Peak Code Domain Error Tau Carrier Feedthrough Noise Floor

### Setup Parameters

Slot Selection	Auto, 0-6
Trigger	Trigger Type (No Trigger/GPS/External), External Trigger (Rising/Falling), Tau Offset
SYNC-DL Code	Auto, 0-31
Scrambling/Midamble Code	Auto, 0-127
Maximum Users	Auto, 2, 4, 6, 8, 10, 12, 14, 16
Measurement Speed	Fast, Normal, Slow
User Selectable	Uplink Switch Point, Number of Carriers (1, 3), Tau Offset
Demodulation Type	Auto, QPSK, 8 PSK, 16 QAM
Frequency	Center, Signal Standard, Channel #, Closest Channel, Decrement/Increment Channel
Amplitude	Scale/Division, Power Offset, Auto Range, Adjust Range, Units (dBm/Watts)
Sweep	Hold/Run, Trigger Sweep
Save/Recall	Setup, Measurement, Screen Shot (save only), to Internal/External Memory
Measurement Summary Screens	Overall Measurements, RF Measurements, Signal Quality Measurements

### RF Measurements (Option 0060)

RF Channel Power Accuracy (RRC)	± 1.5 dB, ± 1.0 dB typical, (slot power -40 dBm to +10 dBm)
Frequency Error	± 20 Hz + time base error, in the presence of a downlink slot

### Demodulation (Option 0061)

Supported Modulation	QPSK, 8 PSK, 16 QAM, MBMS
Residual EVM (rms)	3% typical, P-CCPH slot power > -50 dBm
PN Offset	Within 1 x 64 chips
Pilot Power Accuracy	± 1.0 dB typical
Timing Error (Tau) for Dominant SYNC-DL	± 0.2 μs (external trigger)
Spreading Factor	1, 16

### Over-the-Air (OTA) Measurements (Option 0038)

Code Scanner	32 Sync Codes and associated Scrambling Code Groups
Tau Scanner	Six strongest Sync Codes
Auto Save	Yes
GPS Tagging and Logging	Yes

## Spectrum Master™ MS2726C Spectrum Analyzer Specifications

All specifications and characteristics apply under the following conditions, unless otherwise stated: 1) After 5 minutes of warm-up time, where the instrument is left in the ON state; 2) Apply when using internal reference and performance sweep mode; 3) Subject to change without notice; 4) Typical performance is the measured performance of an average unit; 5) Recommended calibration cycle is 12 months.

### General Specifications

#### Setup Parameters

System	Status (Temperature, Battery Info, S/N, Firmware Ver, IP Address, Options Installed) Self Test, Application Self Test GPS (see Option 0031)
System Options	Name, Date and Time, Ethernet Configuration, Display, Volume Display (Brightness, Default Colors, Black and White, Night Vision, High Contrast) Language (English, French, German, Spanish, Chinese, Japanese, Korean, Italian, User defined) Share Center Frequency and Power Offset between Modes Reset (Factory Defaults, Master Reset, Update Firmware)
File	Save, Recall, Delete, Directory Management
Save/Recall	Setups, Measurements, Screen Shots Jpeg (save only)
Delete	Selected File, All Measurements, All Mode Files, All Content
Directory Management	Sort Method (Name/Type/Date), Ascend/Descend, Internal/USB, Copy, Format USB
Internal Trace/Setup Memory	> 13,000 traces
External Trace/Setup Memory	Limited by size of USB Flash drive or Compact Flash module
Mode Switching	Auto-Stores/Recalls most recently used Setup Parameters in the Mode

#### Connectors

RF In	Type K, male, 50 Ω, Maximum Input +30 dBm, ± 50 VDC
GPS	SMA Female
External Power	5.5 mm barrel connector, 12 to 15 VDC, < 5.0 Amps
LAN Connection	RJ48C, 10/100 Mbps, Connect to PC or LAN for Remote Access
USB Interface (2)	Type A, Connect Flash Drive and Power Sensor
USB Interface	5-pin mini-B, Connect to PC for data transfer
Headset Jack	2.5 mm barrel connector
External Reference In	BNC, female, 50 Ω, Maximum Input +10 dBm
External Reference Out	BNC, female, 50 Ω, 10 MHz
External Trigger	BNC, female, 50 Ω, Maximum Input ± 5 VDC
IF Out	BNC, female, 50 Ω, 140 MHz

#### Display

Size	8.0 in
Resolution	800 x 600

#### Battery

Type	Li-Ion
Battery Operation	2.5 hours, typical

#### Electromagnetic Compatibility

European Union	CE Mark, EMC Directive 89/336/EEC, 92/31/EEC, 93/68/EEC and Low Voltage Directive 73/23/EEC, 93/68/EEC
Australia and New Zealand	C-tick N274
Interference	EN 61326-1
Emissions	EN 55011
Immunity	EN 61000-4-2/-3/-4/-5/-6/-11

#### Safety

Safety Class	EN 61010-1 Class 1
Product Safety	IEC 60950-1 when used with Company supplied Power Supply

#### Environmental

Operating Temperature	-10 °C to 55 °C
Maximum Humidity	85%
Shock	MIL-PRF-28800F Class 2
Storage	-51 °C to 71 °C
Altitude	4600 meters, operating and non-operating

#### Size and Weight

Size	315 mm x 211 mm x 77 mm, (12.4 in x 8.3 in x 3.0 in)
Weight	3.8 kg, (8.5 lbs)

## Spectrum Master™ MS2726C Spectrum Analyzer Specifications

### Master Software Tools (for your PC)

#### Database Management

Full Trace Retrieval	Retrieve all traces from instrument into one PC directory
Trace Catalog	Index all traces into one catalog
Trace Rename Utility	Rename measurement traces
Group Edit	Titles, subtitles, plot scaling, markers and limit lines, simultaneously on similar files
DAT File Converter	Converts HHST files to MST file format and vice-versa

#### Data Analysis

Trace Math and Smoothing	Compare multiple traces
Data Converter	Convert from/to Return Loss/ VSWR/ Cable Loss/ DTF and also into Smith Charts
Measurement Calculator	Translates into other units

#### Report Generation

Report Generator	Includes GPS, power level, and calibration status along with measurements
Edit Graph	Change scale, limit lines, and markers
Report Format	Create reports in HTML for PDF format
Export Measurements	Export measurements to *.s2p, *.jpg or *.csv format
Notes	Annotate measurements

#### Mapping (GPS Required)

Spectrum Analyzer Mode	MapInfo, MapPoint
Mobile WiMAX OTA Option	Google Earth, Google Maps, MapInfo

#### Folder Spectrogram (Spectrum Monitoring for Interference Analysis and Spectrum Clearing)

Folder Spectrogram – 2D View	Creates a composite file of multiple traces Peak Power, Total Power, Peak Frequency, Histogram, Average Power (Max/Min) File Filter (Violations over limit lines or deviations from averages) Playback
Video Folder Spectrogram – 2D View	Create AVI file to export for management review/reports
Folder Spectrogram – 3D View	Views (Set Threshold, Markers) - 3D (Rotate X, Y, Z Axis, Level Scale, Signal ID) - 2D View (Frequency or Time Domain, Signal ID) - Top Down Playback (Frequency and/or Time Domain)

#### List/Parameter Editors

Traces	Add, delete, and modify limit lines and markers
Antennas, Cables, Signal Standards	Modify instrument's Antenna, Cable, and Signal Standard List
Product Updates	Auto-checks Anritsu website for latest revision firmware
Firmware Upload	Upload new firmware into the instrument
Pass/Fail	Create, download, or edit Signal Analysis Pass/Fail Limits
VSG Pattern Converter	Import user-defined patterns (ASCII text or MATLAB file format required)
Languages	Add up to two languages or modify non-English language menus
Mobile WiMAX	DL-MAP Parameters
Display	Modify display settings

#### Script Master™















Channel Scanner Mode	Automate scan up to 1200 channels, repeat for sets of 20 channels, repeat all channels
GSM/GPRS/EDGE or W-CDMA/HSDPA Mode	Automate Signal Analysis testing requirements with annotated how-to pictures

#### Connectivity

Connections	Connect to PC using USB, LAN, or Direct Ethernet connection
Download	Download measurements and live traces to PC for storage and analysis
Upload	Upload measurements from PC to instrument
Firmware Updates	Product Update: download latest firmware version
Remote Access Tool	Remote control and monitoring of instrument (via Ethernet port) over the Internet

## Spectrum Master™ MS2726C Spectrum Analyzer Specifications

### Ordering Information

		<b>MS2726C</b>	<b>Description</b>
		9 kHz to 43 GHz	Spectrum Analyzer
<b>Options</b>			
		MS2726C-0007	Secure Data Operation
		MS2726C-0031	GPS Receiver (requires Antenna P/N 2000-1528-R)
		MS2726C-0019	High-Accuracy Power Meter
		MS2726C-0025	Interference Analyzer
		MS2726C-0027	Channel Scanner
		MS2726C-0089	Zero-Span IF Output
		MS2726C-0009	I/Q Demodulation Hardware
		MS2726C-0040	GSM/GPRS/EDGE RF Measurements*
		MS2726C-0041	GSM/GPRS/EDGE Demodulation*
		MS2726C-0044	W-CDMA/HSDPA RF Measurements*
		MS2726C-0045	W-CDMA Demodulation*
		MS2726C-0065	W-CDMA/HSDPA Demodulation*
		MS2726C-0035	W-CDMA/HSDPA Over-the-Air (OTA) Measurements**
		MS2726C-0060	TD-SCDMA/HSDPA Measurements*
		MS2726C-0061	TD-SCDMA/HSDPA Demodulation*
		MS2726C-0038	TD-SCDMA/HSDPA Over-the-Air (OTA) Measurements*
		MS2726C-0541	LTE RF Measurements*
		MS2726C-0542	LTE Modulation Measurements*
		MS2726C-0543	LTE BW = 15 MHz, 20 MHz (requires Option 0541 or 0542)
		MS2726C-0546	LTE Over-the-Air (OTA) Measurements*
		MS2726C-0042	cdmaOne/CDMA2000 1X RF Measurements*
		MS2726C-0043	cdmaOne/CDMA2000 1X Demodulation*
		MS2726C-0033	cdmaOne/CDMA2000 1X Over-the-Air (OTA) Measurements**
		MS2726C-0062	CDMA2000 1xEV-DO RF Measurements*
		MS2726C-0063	CDMA2000 1xEV-DO Demodulation*
		MS2726C-0034	CDMA2000 1xEV-DO Over-the-Air (OTA) Measurements**
		MS2726C-0046	IEEE 802.16 Fixed WIMAX RF Measurements*
		MS2726C-0047	IEEE 802.16 Fixed WIMAX Demodulation*
		MS2726C-0066	IEEE 802.16 Mobile WIMAX RF Measurements*
		MS2726C-0067	IEEE 802.16 Mobile WIMAX Demodulation*
		MS2726C-0037	IEEE 802.16 Mobile WIMAX Over-the-Air (OTA) Measurements*
		MS2726C-0098	Standard Calibration (ANSI Z540-1-1994)
		MS2726C-0099	Premium Calibration (ANSI Z540-1-1994 plus test data)

\*Requires Option 0009, \*\*Requires Option 0009, and Option 0031


### Power Sensors (For complete ordering information see the respective datasheets of each sensor)



<b>Part Number</b>	<b>Description</b>
PSN50	High Accuracy RF Power Sensor, 50 MHz to 6 GHz, +20 dBm
MA24104A	Inline High Power Sensor, 600 MHz to 4 GHz, 150 W
MA24106A	High Accuracy RF Power Sensor, 50 MHz to 6 GHz, +23 dBm
MA24108A	Microwave USB Power Sensor, 10 MHz to 8 GHz, +20 dBm
MA24118A	Microwave USB Power Sensor, 10 MHz to 18 GHz, +20 dBm
MA24126A	Microwave USB Power Sensor, 10 MHz to 26 GHz, +20 dBm


## Spectrum Master™ MS2726C Spectrum Analyzer Specifications

Manuals (soft copy available at [www.anritsu.com](http://www.anritsu.com))

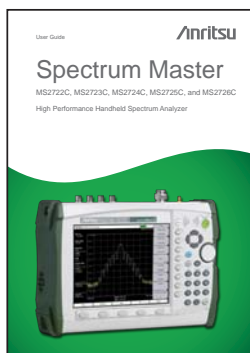

Part Number	Description
10580-00277	Spectrum Master User Guide (Hard copy included) - Bias-Tee, GPS Receiver
10580-00244	Spectrum Analyzer Measurement Guide - Interference Analyzer, Channel Scanner, IF Output
10580-00240	Power Meter Measurement Guide - High Accuracy Power Meter
10580-00234	3GPP Signal Analyzer Measurement Guide - GSM/EDGE, W-CDMA/HSDPA, TD-SCDMA/HSDPA, LTE
10580-00235	3GPP2 Signal Analyzer Measurement Guide - CDMA, EV-DO
10580-00236	WiMAX Signal Analyzer Measurement Guide - Fixed WiMAX, Mobile WiMAX
10580-00278	Programming Manual
10580-00279	Maintenance Manual

Troubleshooting Guides (soft copy included on MST CD and at [www.anritsu.com](http://www.anritsu.com))



11410-00551	Spectrum Analyzers
11410-00472	Interference
11410-00466	GSM/GPRS/EDGE Base Stations
11410-00566	LTE eNodeB Testing
11410-00463	W-CDMA/HSDPA Base Stations
11410-00465	TD-SCDMA/HSDPA Base Stations
11410-00467	cdmaOne/CDMA2000 1X Base Stations
11410-00468	CDMA2000 1xEV-DO Base Stations
11410-00470	Fixed WiMAX Base Stations
11410-00469	Mobile WiMAX Base Stations

Standard Accessories (included with instrument)



10580-00277	Spectrum Master User Guide (includes Bias-Tee and GPS Receiver)
2300-498	MST CD: Master Software Tools, User/Measurement Guides, Programming Manual, Troubleshooting Guides, Application Notes
65729	Soft Carrying Case
633-44	Rechargeable Li-Ion Battery
40-168-R	AC/DC Power Supply
806-141-R	Automotive Cigarette Lighter 12 Volt DC Adapter
2000-1371-R	Ethernet Cable, 7 feet/213 cm
3-2000-1498	USB A-mini B Cable, 10 feet/305 cm
11410-00529	MS2722C Spectrum Master Technical Data Sheet
11410-00524	MS2723C Spectrum Master Technical Data Sheet
11410-00525	MS2724C Spectrum Master Technical Data Sheet
11410-00526	MS2725C Spectrum Master Technical Data Sheet
11410-00527	MS2726C Spectrum Master Technical Data Sheet
	One Year Warranty (Including battery, firmware, and software)
	Certificate of Calibration and Conformance



## Spectrum Master™ MS2726C Spectrum Analyzer Specifications

### Optional Accessories

#### Directional Antennas



Part Number	Description
2000-1411-R	824 MHz to 896 MHz, N(f), 10 dBd, Yagi
2000-1412-R	885 MHz to 975 MHz, N(f), 10 dBd, Yagi
2000-1413-R	1710 MHz to 1880 MHz, N(f), 10 dBd, Yagi
2000-1414-R	1850 MHz to 1990 MHz, N(f), 9.3 dBd, Yagi
2000-1415-R	2400 MHz to 2500 MHz, N(f), 10 dBd, Yagi
2000-1416-R	1920 MHz to 2170 MHz, N(f), 10 dBd, Yagi
2000-1519-R	500 MHz to 3000 MHz, log periodic
2000-1617	600 MHz to 21000 MHz, N(f), 5-8 dBi to 12 GHz, 0-6 dBi to 21 GHz, log periodic

#### Portable Antennas



2000-1200-R	806 MHz to 866 MHz, SMA(m), 50 Ω
2000-1473-R	870 MHz to 960 MHz, SMA(m), 50 Ω
2000-1035-R	896 MHz to 941 MHz, SMA(m), 50 Ω (1/4 wave)
2000-1030-R	1710 MHz to 1880 MHz, SMA(m), 50 Ω (1/2 wave)
2000-1474-R	1710 MHz to 1880 MHz with knuckle elbow (1/2 wave)
2000-1031-R	1850 MHz to 1990 MHz, SMA(m), 50 Ω (1/2 wave)
2000-1475-R	1920 MHz to 1980 MHz and 2110 MHz to 2170 MHz, SMA(m), 50 Ω
2000-1032-R	2400 MHz to 2500 MHz, SMA(m), 50 Ω (1/2 wave)
2000-1361-R	2400 MHz to 2500 MHz, 5000 MHz to 6000 MHz, SMA(m), 50 Ω
2000-1616	20 MHz to 21000 MHz, N(f), 50 Ω
2000-1636-R	Antenna Kit (Consists of: 2000-1030-R, 2000-1031-R, 2000-1032-R, 2000-1200-R, 2000-1035-R, 2000-1361-R, and carrying pouch)

#### Bandpass Filters



1030-114-R	806 MHz to 869 MHz, N(m) to SMA(f), 50 Ω
1030-109-R	824 MHz to 849 MHz, N(m) to SMA(f), 50 Ω
1030-110-R	880 MHz to 915 MHz, N(m) to SMA(f), 50 Ω
1030-105-R	890 MHz to 915 MHz Band, 0.41 dB loss, N(m) to SMA(f), 50 Ω
1030-111-R	1850 MHz to 1910 MHz, N(m) to SMA(f), 50 Ω
1030-106-R	1710 MHz to 1790 MHz Band, 0.34 dB loss, N(m) to SMA(f), 50 Ω
1030-107-R	1910 MHz to 1990 MHz Band, 0.41 dB loss, N(m) to SMA(f), 50 Ω
1030-112-R	2400 MHz to 2484 MHz, N(m) to SMA(f), 50 Ω
1030-155-R	2500 MHz to 2700 MHz, N(m) to N(f), 50 Ω

#### Attenuators



3-1010-122	20 dB, 5 W, DC to 12.4 GHz, N(m) to N(f)
42N50-20	20 dB, 5 W, DC to 18 GHz, N(m) to N(f)
42N50A-30	30 dB, 5 W, DC to 18 GHz, N(m) to N(f)
3-1010-123	30 dB, 50 W, DC to 8.5 GHz, N(m) to N(f)
1010-127-R	30 dB, 150 W, DC to 3 GHz, N(m) to N(f)
3-1010-124	40 dB, 100 W, DC to 8.5 GHz, N(m) to N(f), Uni-directional
1010-121	40 dB, 100 W, DC to 18 GHz, N(m) to N(f), Uni-directional
1010-128-R	40 dB, 150 W, DC to 3 GHz, N(m) to N(f)

## Spectrum Master™ MS2726C Spectrum Analyzer Specifications

### Optional Accessories (continued)

#### Adapters



1091-26-R	SMA(m) to N(m), DC to 18 GHz, 50 Ω
1091-27-R	SMA(f) to N(m), DC to 18 GHz, 50 Ω
1091-80-R	SMA(m) to N(f), DC to 18 GHz, 50 Ω
1091-81-R	SMA(f) to N(f), DC to 18 GHz, 50 Ω
1091-172	BNC(f) to N(m), DC to 1.3 GHz, 50 Ω
1091-379-R	7/16 DIN(f) to 7/16 DIN(f), DC to 6 GHz, 50 Ω, w/ Reinforced Grip
71693-R	Ruggedized K(f) to Type N(f)
510-102-R	N(m) to N(m), DC to 11 GHz, 50 Ω, 90 degrees right angle

#### Precision Adapters



34NN50A	Precision Adapter, N(m) to N(m), DC to 18 GHz, 50 Ω
34NFN50	Precision Adapter, N(f) to N(f), DC to 18 GHz, 50 Ω

#### Miscellaneous Accessories



2000-1528-R	GPS Antenna, SMA(m)
69793	CW Signal Generator Kit
2000-1520-R	USB Flash Drive
2000-1374	External Charger for Li-Ion Batteries

#### Backpack and Transit Case



67135	Anritsu Backpack (For Handheld Instrument and PC)
760-243-R	Large Transit Case with Wheels and Handle

## Notes

---



The Master Users Group is an organization dedicated to providing training, technical support, networking opportunities and links to Master product development teams. As a member you will receive the Insite Quarterly Newsletter with user stories, measurement tips, new product news and more.

Visit us to register today: [www.anritsu.us/smiusignup](http://www.anritsu.us/smiusignup)



To receive a quote to purchase a product or order accessories visit our online ordering site: [www.ShopAnritsu.com](http://www.ShopAnritsu.com)

## Training at Anritsu

Anritsu has designed courses to help you stay up to date with technologies important to your job.

For available training courses visit: [www.anritsu.com/training](http://www.anritsu.com/training)



### Anritsu Corporation

5-1-1 Onna, Atsugi-shi, Kanagawa, 243-8555 Japan  
Phone: +81-46-223-1111  
Fax: +81-46-296-1238

#### • U.S.A.

##### Anritsu Company

1155 East Collins Boulevard, Suite 100,  
Richardson, TX, 75081 U.S.A.  
Toll Free: 1-800-ANRITSU (267-4878)  
Phone: +1-972-644-1777  
Fax: +1-972-671-1877

#### • Canada

##### Anritsu Electronics Ltd.

700 Silver Seven Road, Suite 120, Kanata,  
Ontario K2V 1C3, Canada  
Phone: +1-613-591-2003  
Fax: +1-613-591-1006

#### • Brazil

##### Anritsu Eletrônica Ltda.

Praça Amadeu Amaral, 27 - 1 Andar  
01327-010 - Bela Vista - São Paulo - SP - Brasil  
Phone: +55-11-3283-2511  
Fax: +55-11-3288-6940

#### • Mexico

##### Anritsu Company, S.A. de C.V.

Av. Ejército Nacional No. 579 Piso 9, Col. Granada  
11520 México, D.F., México  
Phone: +52-55-1101-2370  
Fax: +52-55-5254-3147

#### • U.K.

##### Anritsu EMEA Ltd.

200 Capability Green, Luton, Bedfordshire LU1 3LU, U.K.  
Phone: +44-1582-433280  
Fax: +44-1582-731303

#### • France

##### Anritsu S.A.

12 Avenue du Québec,  
Bâtiment Iris 1-Silic 638,  
91140 VILLEBON SUR YVETTE, France  
Phone: +33-1-60-92-15-50  
Fax: +33-1-64-46-10-65

#### • Germany

##### Anritsu GmbH

Nemetschek Haus, Konrad-Zuse-Platz 1  
81829 München, Germany  
Phone: +49 (0) 89 442308-0  
Fax: +49 (0) 89 442308-55

#### • Italy

##### Anritsu S.p.A.

Via Elio Vittorini, 129, 00144 Roma, Italy  
Phone: +39-06-509-9711  
Fax: +39-06-502-2425

#### • Sweden

##### Anritsu AB

Borgarfjordsgatan 13, 164 40 KISTA, Sweden  
Phone: +46-8-534-707-00  
Fax: +46-8-534-707-30

#### • Finland

##### Anritsu AB

Teknobulevardi 3-5, FI-01530 VANTAA, Finland  
Phone: +358-20-741-8100  
Fax: +358-20-741-8111

#### • Denmark

##### Anritsu A/S (for Service Assurance) Anritsu AB (for Test & Measurement)

Kirkebjerg Allé 90 DK-2605 Brøndby, Denmark  
Phone: +45-7211-2200  
Fax: +45-7211-2210

#### • Russia

##### Anritsu EMEA Ltd.

##### Representation Office in Russia

Tverskaya str. 16/2, bld. 1, 7th floor.  
Russia, 125009, Moscow  
Phone: +7-495-363-1694  
Fax: +7-495-935-8962

#### • United Arab Emirates

##### Anritsu EMEA Ltd.

##### Dubai Liaison Office

P O Box 500413 - Dubai Internet City  
Al Thuraya Building, Tower 1, Suite 701, 7th Floor  
Dubai, United Arab Emirates  
Phone: +971-4-3670352  
Fax: +971-4-3688460

#### • Singapore

##### Anritsu Pte. Ltd.

60 Alexandra Terrace, #02-08, The Comtech (Lobby A)  
Singapore 118502  
Phone: +65-6282-2400  
Fax: +65-6282-2533

#### • India

##### Anritsu Pte. Ltd.

##### India Branch Office

3rd Floor, Shri Lakshminarayan Niwas, #2726, 80 ft Road,  
HAL 3rd Stage, Bangalore - 560 075, India  
Phone: +91-80-4058-1300  
Fax: +91-80-4058-1301

#### • P. R. China (Hong Kong)

##### Anritsu Company Ltd.

Units 4 & 5, 28th Floor, Greenfield Tower, Concordia Plaza,  
No. 1 Science Museum Road, Tsim Sha Tsui East,  
Kowloon, Hong Kong, P.R. China  
Phone: +852-2301-4980  
Fax: +852-2301-3545

#### • P. R. China (Beijing)

##### Anritsu Company Ltd.

##### Beijing Representative Office

Room 2008, Beijing Fortune Building,  
No. 5, Dong-San-Huan Bei Road,  
Chao-Yang District, Beijing 100004, P.R. China  
Phone: +86-10-6590-9230  
Fax: +86-10-6590-9235

#### • Korea

##### Anritsu Corporation, Ltd.

8F Hyunjuk Bldg. 832-41, Yeoksam-Dong,  
Kangnam-ku, Seoul, 135-080, Korea  
Phone: +82-2-553-6603  
Fax: +82-2-553-6604

#### • Australia

##### Anritsu Pty Ltd.

Unit 21/270 Ferntree Gully Road, Notting Hill  
Victoria, 3168, Australia  
Phone: +61-3-9558-8177  
Fax: +61-3-9558-8255

#### • Taiwan

##### Anritsu Company Inc.

7F, No. 316, Sec. 1, Neihu Rd., Taipei 114, Taiwan  
Phone: +886-2-8751-1816  
Fax: +886-2-8751-1817

