



Arbitrary Waveform Generators

AWG4000 Series Datasheet



The unmatched performance, versatile functionality, outstanding usability, and upgradability make the AWG4000 an affordable waveform generation platform which helps stretch the specifications of your designs to the limit.

Key performance specifications

- Basic (DDS) mode
 - Two analog channels
 - 600 MHz sine waveforms
 - 2.5 GS/s, 14-bit, 16 kpts arbitrary waveforms
 - Amplitude up to 5 V_{p-p} into 50 Ω load
- Advanced (Arbitrary) mode
 - Two analog channels
 - 16/32-bit digital channels (optional)
 - 1/16/32/64 Mpts per channel arbitrary waveform memory (optional)
 - Up to 750 MHz bandwidth
 - SFDR < -60 dBc

Features & benefits

- Variable sampling rate range from 100 S/s to 2.5 GS/s, with 14-bit vertical resolution, ensures signal integrity in all aspects
- Designed for 100% user-conducted upgrades and configurations, all options activated through SW key
 - Optional and upgradable arbitrary waveform memory up to 64 Mpts for each analog channel and 32 Mbit for each digital channel for long waveforms
 - Optional 16-32 channel digital outputs. Purchasing SW option includes the shipment of digital probe accessory.

- Two operation modes – Basic (DDS AFG mode) and advanced (arbitrary AWG mode), which provide excellent balance between usability and flexibility
- Dual analog channels and up to 32-bit digital channels, ideal for mixed signal circuit designs
- Sync-in and Sync-out interfaces enables the synchronization of multiple units in a daisy chain, to extend the number of output channels
- Digital outputs provide up to 1.25 Gb/s data rate creates high speed digital pattern in parallel
- One marker output for each analog channel for triggering and synchronization
- Three software-configurable output paths fit all test cases
 - Direct DAC mode: 750 MHz bandwidth with differential output
 - AC coupled mode: 750 MHz bandwidth with single ended output for RF applications
 - Amplified mode: 5 V_{p-p} amplitude 400 MHz bandwidth with differential output
- Full functional sequence with up to 16384 user defined waveforms provides the possibility of generating complex signals with the best memory usage, in the form of loops, jumps, and conditional branches
- Channel 1 and 2 (together with the corresponding digital output channels) can work independently on different sampling clocks and sequences
- Direct communication with RFXpress® for easy waveform generation in RF applications
- Windows based platform with 10.1-in touch screen, front panel buttons, keyboard, and mouse
- Compact form factor, convenient for bench top and portability
- Removable hard disk guarantees the security of confidential data
- USB 3.0 and LAN interfaces for remote control

Applications

- Baseband and Intermediate Frequency modulation for wireless communications and defense electronics
- Component and circuit characterization and validation
- Embedded circuit design and test
- Mixed-signal circuit design and test
- Clock and system synchronization
- Replication of real world signals

- Research
- General purpose signal generation

Dual operation mode

The AWG4000 is the industry's first convergent waveform generator with full function AFG (Basic) and AWG (Advanced) modes.

Basic mode has a dedicated user interface similar to traditional AFG for generating function and arbitrary waveforms with minimum button clicks and shallow menu hierarchy. The large touch screen displays all related parameters at one glance, and enables you directly click where you want to change. The DDS based technology enables users to switch from one frequency to another by rotating knob or button clicks, without concerning the sampling rate and waveform length



In Advanced mode, users can define complex waveforms with up to 16,384 entries of analog waveforms and digital patterns in a sequence, in terms of loops, jumps, and conditional branches.



In the Multi-sequence mode, two sequences can be defined to control Channel 1 and Channel 2 (and the corresponding digital channels) separately as two units of generator.

Best in class performance in its price range

The AWG4000 gives users access to the best-in-class DAC technology at an affordable price. Up-to 2.5 GS/s sampling rate and 14-bit vertical resolution help users generate ultra wideband communication signals with 750 MHz modulation bandwidth and the < -60 dBc SFDR across each channel. The analog channels can be configured to output differential, single ended, or AC coupled, eliminating the needs of baluns or hybrids in the test path.

Mixed-signal generation

The AWG4000 has optional 16/32-bit digital outputs, synchronized with the corresponding analog channels in two 16-bit groups. Each group can be configured as 8-bit full speed (bit rate at half the sampling rate) or 16-bit low speed (bit rate at 1/4 of the sampling rate). The mixed signal generation is a great solution for digital designs and validation, system synchronization and DAC/ADC tests.

Upgradability protects ROI

The standard configuration of AWG4000 is 1 Mpts for each analog channel and no digital channels. This helps to reduce the ownership threshold of accessing to the product. However, when the test requirement increases, a customer can purchase the option keys to upgrade the memory to 16 Mpts, 32 Mpts or 64 Mpts, or to upgrade the digital channel to 16-bit or 32-bit. It eliminates the need of concerning the risk of lowering ROI in the whole life time.

System extension with multi-unit synchronization

Two or more AWG4000s can be synchronized by connecting the Sync-in and Sync-out interfaces of the master and the slaves. In this way, all units will share the same sampling clock, reference clock, and triggering events. This helps customers expand the number of output channels, which is extremely useful in the applications where multiple channels are needed, like MIMO.

Intuitive user interface

The AWG4000 is built on the Windows platform. The 10.1-in touch screen displays parameters, settings, and on-screen menus/buttons. Together with the similar-to-traditional front panel buttons and rotary knobs, the user friendly user interface provides intuitive ways to operate the instrument easily in the Basic mode. However, if a user works in the Advanced mode to create complex sequenced waveforms, an external keyboard and mouse can be connected to the instrument through the USB interface. This helps the user operate in a normal Windows application.

Easy waveform creation

In the Basic mode, a plug-in called ArbBuilder is embedded in the application. Users can create customized waveforms from standard waveforms, with the equation editor, free hand, point draw tools, or simply import the tfw files generated by ArbExpress®, and then transfer to either channels for replication.

In Advanced mode, RFXpress® can communicate with the application directly and download the waveforms generated by the software running on the instrument or an external PC. Users can also import waveforms captured by Tektronix oscilloscopes, logic analyzers, or created by 3rd party software like Matlab®, FPGA simulation tools.

Specifications

All specifications are guaranteed unless noted otherwise. All specifications apply to all models unless noted otherwise.

Definitions

| | |
|-----------------------------------|---|
| Specifications (not noted) | Product characteristics described in terms of specified performance with tolerance limits which are warranted/guaranteed to the customer. Specifications are checked in the manufacturing process and in the Performance Verification section of the product manual with a direct measurement of the parameter. |
| Typical (noted) | Product characteristics described in terms of typical performance, but not guaranteed performance. The values given are never warranted, but most units will perform to the level indicated. Typical characteristics are not tested in the manufacturing process or the Performance Verification section of the product manual. |
| Nominal (not noted) | Product characteristics described in terms of being guaranteed by design. Nominal characteristics are non-warranted, so they are not checked in the manufacturing process or the Performance Verification section of the product manual. |

Model overview

| | AWG4162 |
|------------------|----------------------|
| Analog channels | 2 |
| Digital channels | 0/16/32-bit optional |
| Markers | 2 |

Operation modes

| | |
|----------------------------|---|
| Basic | DDS mode |
| Standard waveforms | Sine, Square, Pulse, Ramp, more (Noise, DC, Sin(x)/x, Gaussian, Lorentz, Exponential Rise, Exponential Decay, Haversine) |
| Run modes | Continuous, modulation, sweep, burst |
| Arbitrary waveforms | Sampling clock: 2.5 GS/s, fixed |
| | Vertical resolution: 14-bit |
| | Waveform length: 16,384 points |
| <hr/> | |
| Advanced | AWG mode |
| Run modes | Continuous, sequencer, triggered, gated |
| Sampling clock | 100 S/s to 2.5 GS/s, variable |
| Vertical resolution | 14-bit |
| Waveform length | 64 to 64 M points (1 M = 2 ²⁰) in multiple of 64 points for length < 320 points, in multiple of 16 points for length ≥ 320 points |
| | Standard: 1 M points |
| | Optional: 16 M, 32 M, 64 M points |

Operation modes

| | |
|-----------------------------|---|
| Sequence length | 1 to 16,384 entries |
| Sequence control | Repeat Waveform, Wait for Multiple Triggers (up to 7 triggers), Wait for Multiple Events (up to 7 events), Jump if Event (up to 7 events, synchronous or asynchronous), Jump to (synchronous or asynchronous) |
| Repeat count | 1 to 2,097,151 or infinite |
| Jump timing | Synchronous or asynchronous |
| Digital waveform | Standard: 0-bit Optional: 16 or 32-bit |
| Built-in standard waveforms | DC, Sine, Cosine, Triangle, Rectangle, Sawtooth, Increase-ramp, Decrease-ramp, Pulse, Sinc, Exponential, Sweep |
| Arbitrary waveforms | Formula, file, user defined |
| Additional | Noise, filter can be applied to the waveforms above |

General characteristics - Basic mode

| | |
|------------------|---|
| Connectors | SMA's for DC AMP on front panel |
| Output types | Single-ended or differential |
| Output impedance | 50 Ω (Single-ended) or 100 Ω (differential) |

Frequency range

| | |
|---|-----------------------|
| Sine | 1 μ Hz to 600 MHz |
| Square | 1 μ Hz to 330 MHz |
| Pulse | 1 μ Hz to 330 MHz |
| Ramp, Exponential Rise, Exponential Decay | 1 μ Hz to 30 MHz |
| Sin(x)/X, Gaussian, Lorentz, Haversine | 1 μ Hz to 60 MHz |
| Arbitrary | 1 μ Hz to 400 MHz |

Frequency resolution

| | |
|---|-------------------------|
| sine, square, pulse, arbitrary | 1 μ Hz or 15 digits |
| Ramp, Sin(x)/X, Gaussian, Lorentz, Exponential Rise, Exponential Decay, Haversine | 1 μ Hz or 14 digits |

Frequency accuracy

| | |
|---------|---|
| non-ARB | $\pm 10^{-6}$ of setting |
| ARB | $\pm 10^{-6}$ of setting ± 1 μ Hz |

Sine waves

| | |
|---|---|
| Flatness (1 V_{p-p} , relative to 1 kHz) | DC to 600 MHz : ± 0.5 dB |
| Harmonic Distortion (1 V_{p-p}) | 1 μ Hz to ≤ 10 MHz: < -60 dBc > 10 MHz to ≤ 50 MHz: < -55 dBc > 50 MHz to ≤ 200 MHz: < -40 dBc > 200 MHz to ≤ 600 MHz: < -28 dBc |
| Total Harmonic Distortion (1 V_{p-p} , typical) | 10 Hz to 20 kHz: < 0.1% |

General characteristics - Basic mode

| | |
|---|---|
| Spurious (1 V _{p-p}) | 1 μHz to ≤ 10 MHz: < -65 dBc >10 MHz to ≤ 330 MHz: < -55 dBc > 330 MHz to ≤ 500 MHz: < -50 dBc > 500 MHz to ≤ 600 MHz: < -40 dBc |
| Phase Noise (1 V _{p-p} , 10 kHz offset, typical) | 1 MHz: < -115 dBc/Hz 10 MHz: < -110 dBc/Hz 100 MHz: < -105 dBc/Hz 600 MHz: < -90 dBc/Hz |
| <hr/> | |
| Square waves | |
| Rise/fall time (typical) | 1 ns |
| Overshoot (1 V _{p-p} , typical) | < 2% |
| Jitter (rms, typical) | 50 ps |
| <hr/> | |
| Pulse waves | |
| Pulse width | 1 ns to (Period - 1 ns) |
| Resolution | 10 ps or 15 digits |
| Pulse duty | 0.1% to 99.9% (limitations of pulse width apply) |
| Leading/trailing edge transition time | 800 ps to 1000 s |
| Resolution | 1 ps or 15 digits |
| Overshoot (1 V _{p-p} , typical) | < 2% |
| Jitter (rms, typical) | 50 ps |
| <hr/> | |
| Ramp waves | |
| Linearity (< 10 kHz, 1 V _{p-p} , 100% Symmetry, typical) | ≤ 0.1% |
| Symmetry | 0% to 100% |
| <hr/> | |
| Other waves | |
| Noise bandwidth (-3 dB, typical) | 400 MHz |
| Noise add | When activated, output signal amplitude is reduced to 50% |
| Level | 0.0% to 50% of amplitude (V _{p-p}) setting |
| Resolution | 0.1% |
| <hr/> | |
| Arbitrary | |
| Number of samples | 2 to 16,384 |
| Analog bandwidth (-3 dB, typical) | 400 MHz |
| Rise/fall time (typical) | ≤ 800 ps |
| Jitter (rms, typical) | 400 ps |
| <hr/> | |
| DC | |
| Range (50 Ω, single-ended) | -2.5 V to 2.5 V |
| Accuracy | ±(1% of setting + 5 mV) |

General characteristics - Basic mode

Amplitude

| | |
|---|--|
| Range (50 Ω, single-ended) | 1 μHz ~ 350 MHz: 5 mV _{p-p} to 5 V _{p-p} 350 MHz ~ 550 MHz: 5 mV _{p-p} to 3 V _{p-p} 550 MHz ~ 600 MHz: 5 mV _{p-p} to 2 V _{p-p} |
| Range (100 Ω, differential) | 1 μHz ~ 350 MHz: 10 mV _{p-p} to 10 V _{p-p} 350 MHz ~ 550 MHz: 10 mV _{p-p} to 6 V _{p-p} 550 MHz ~ 600 MHz: 10 mV _{p-p} to 4 V _{p-p} |
| Accuracy (1 kHz sine wave, 0 V offset, > 5 mV_{p-p} amplitude, 50 Ω load) | ±(1% of setting + 5 mV) |
| Resolution | 1 mV _{p-p} or 4 digits |
| Units | V _{p-p} , V _{rms} , dBm (sine wave only), Volt (high/low settings) |
| Output impedance | Single-ended: 50 Ω Differential: 100 Ω |
| Isolation | No isolation, all SMA and BNC connectors are connected to earth ground directly |

Vocm

| | |
|---|--------------------------|
| Range (50 Ω load, single-ended) | -2.5 V to +2.5 V |
| Range (High Z load, single-ended) | -5 V to +5 V |
| Accuracy (50 Ω load, single-ended) | ±(1% of setting ±5 mV) |
| Resolution | 1 mV or 4 digits |

Offset

| | |
|---|----------------------------|
| Range (50 Ω load, single-ended) | ±(2.5 Vpk - Amplitude ÷ 2) |
| Range (High Z load, single-ended) | ±(5 Vpk - Amplitude ÷ 2) |
| Accuracy (50 Ω load, single-ended) | ±(1% of setting + 5 mV) |
| Resolution | 1 mV or 4 digits |

Window

| | |
|-------------------------------------|---|
| Range (50 Ω, single-ended) | 1 μHz ~ 350 MHz: -5 V to +5 V 350 MHz ~ 550 MHz: -4 V to +4 V 550 MHz ~ 600 MHz: -3.5 V to +3.5 V |
| Range (100 Ω, differential) | 1 μHz ~ 350 MHz: -10 V to +10 V 350 MHz ~ 550 MHz: -8 V to +8 V 550 MHz ~ 600 MHz: -7 V to +7 V |
| Range (High Z, single-ended) | 1 μHz ~ 350 MHz: -10 V to +10 V 350 MHz ~ 550 MHz: -8 V to +8 V 550 MHz ~ 600 MHz: -7 V to +7 V |

Phase

| | |
|---------------------------|---------------------------|
| Range | 0° to +360° |
| Accuracy (typical) | ±(0.1% of setting ±0.01°) |

General characteristics - Basic mode

Amplitude Modulation (AM)

| | |
|--------------------------------------|--|
| Carrier waveforms | Standard waveforms (except Pulse, DC and Noise), ARB |
| Modulation source | Internal or external |
| Internal modulating waveforms | Sine, Square, Ramp, Noise, ARB |
| Modulating frequency | Internal: 500 μ Hz to 50 MHz External: 10 MHz maximum |
| Depth | 0.00% to 120.00% |

Frequency Modulation (FM)

| | |
|--------------------------------------|--|
| Carrier waveforms | Standard waveforms (except Pulse, DC and Noise), ARB |
| Modulation source | Internal or external |
| Internal modulating waveforms | Sine, Square, Ramp, Noise, ARB |
| Modulating frequency | Internal: 500 μ Hz to 50 MHz External: 10 MHz maximum |
| Peak deviation | DC to 300 MHz |

Phase Modulation (PM)

| | |
|--------------------------------------|--|
| Carrier waveforms | Standard waveforms (except Pulse, DC and Noise), ARB |
| Modulation source | Internal or external |
| Internal modulating waveforms | Sine, Square, Ramp, Noise, ARB |
| Modulating frequency | Internal: 500 μ Hz to 50 MHz External: 10 MHz maximum |
| Phase deviation range | 0° to 180° |

Frequency Shift Keying (FSK)

| | |
|--------------------------------------|--|
| Carrier waveforms | Standard waveforms (except Pulse, DC and Noise), ARB |
| Modulation source | Internal or external |
| Internal modulating waveforms | Square |
| Key rate | Internal: 500 μ Hz to 50 MHz External: 10 MHz maximum |
| Hop frequency | 1 μ Hz to 600 MHz |
| Number of keys | 2 |

Phase Shift Keying (PSK)

| | |
|--------------------------------------|--|
| Carrier waveforms | Standard waveforms (except Pulse, DC and Noise), ARB |
| Modulation source | Internal or external |
| Internal modulating waveforms | Square |
| Key rate | Internal: 500 μ Hz to 50 MHz External: 10 MHz maximum |
| Hop phase | -180° to +180° |
| Number of keys | 2 |

General characteristics - Basic mode

Pulse Width Modulation (PWM)

| | |
|-------------------------------|--|
| Carrier waveforms | Pulse |
| Modulation source | Internal or external |
| Internal modulating waveforms | Sine, Square, Ramp, Noise, ARB |
| Modulating frequency | Internal: 500 μ Hz to 50 MHz External: 10 MHz maximum |
| Deviation range | 0% to 50% of pulse period |

Sweep

| | |
|-------------------------------------|--|
| Type | Linear, Logarithmic, staircase, and user defined |
| Waveforms | Standard waveforms (except Pulse, DC and Noise), ARB |
| Sweep time | 50 μ s to 2000 s |
| Hold/return times | 0 to (2000 s - 50 μ s) |
| Sweep/hold/return time resolution | 20 ns or 12 digits |
| Total sweep time accuracy (typical) | $\leq 0.4\%$ |
| Start/stop frequency range | Sine: 1 μ Hz to 600 MHz Square: 1 μ Hz to 300 MHz |
| Trigger source | Internal/External/Manual |

Burst

| | |
|---|---|
| Waveforms | Standard waveforms (except DC and Noise), ARB |
| Type | Trigger or gated |
| Burst count | 1 to 1,000,000 cycles or Infinite |
| Internal trigger delay | 0 to 100 s |
| Internal trigger delay accuracy (typical) | $\pm(0.1\%$ setting + 5 ps) |
| Internal trigger rate | 0 to 500 s |
| Internal trigger interval range | 1 μ s to 500 s |
| Internal trigger resolution | 2 ns or 12 digits |

General characteristics - Advanced mode

Analog outputs

| | |
|--|--|
| Connector types | SMA's for AMP, DAC, and AC modes on front panel |
| Output types | AMP and DAC modes: single-ended or differential AC mode: single-ended |
| Output impedance | 50 Ω , single-ended 100 Ω , differential |
| Skew between positive and negative outputs (typical) | ≤ 20 ps |

| | |
|--------------|---------------------------|
| Skew control | (Between analog channels) |
| Range | 0 to 240,000 ps |
| Resolution | 10 ps |

General characteristics - Advanced mode

| | |
|--------------------|---|
| Accuracy (typical) | $\pm(10\% \text{ of setting} + 20 \text{ ps})$ |
| Initial skew | < 200 ps from 1.25 GS/s to 2.5 GS/s < 1 ns below 1.25 GS/s |

| | |
|--------------------|---|
| Skew control | (Between analog channel and marker, analog channel to digital channels) |
| Range | 0 to 101,790 ps |
| Resolution | 78 ps |
| Accuracy (typical) | $\pm(10\% \text{ of setting} + 140 \text{ ps})$ |
| Initial skew | < 1.4 ns from 1.25 GS/s to 2.5 GS/s < 2 ns from 100 MS/s to 1.25 GS/s < 4.5 ns below 100 MS/s |

Calculated bandwidth (0.35 / rise or fall time, typical)¹

| | |
|-----|---------|
| AMP | 400 MHz |
| DAC | 750 MHz |
| AC | 750 MHz |

| | |
|-----------|---|
| Amplitude | Range (single-ended, 50 Ω load) |
| AMP | 0 to 5 V_{p-p} (doubled in case of differential or High Z load) |
| DAC | 0 to 0.8 V_{p-p} (doubled in case of differential or High Z load) |
| AC | 0 to 2 V_{p-p} (doubled in case of High Z load) |

Accuracy

| | |
|--|---|
| AMP, DAC (1 kHz sine, offset 0 V) | $\pm(1\% \text{ of setting} + 5 \text{ mV}_{p-p})$ |
| AC (100 MHz sine, offset 0 V, typical) | $\pm(2\% \text{ of setting} + 5 \text{ mV}_{p-p}) - 0.1\% \text{ of } \text{setting} \times \text{temperature deviation}^2$ |

Resolution

| | |
|------------------|--------------------|
| AMP, DAC, and AC | 0.1 mV or 5 digits |
|------------------|--------------------|

| | |
|--------|---|
| Offset | Range (single-ended, 50 Ω load) |
| AMP | -2.5 V to +2.5 V (doubled in case of differential or High Z load) |
| DAC | -0.35 V to +0.35 V (doubled in case of differential or High Z load) |

Accuracy

| | |
|----------|--|
| AMP, DAC | $\pm(1\% \text{ of } \text{setting} + 5 \text{ mV})$ |
|----------|--|

Resolution

| | |
|----------|-------------------|
| AMP, DAC | 10 mV or 3 digits |
|----------|-------------------|

| | |
|------|---|
| Vocm | Range (single-ended, 50 Ω load) |
| AMP | -2.5 V to +2.5 V (doubled in case of differential or High Z load) |
| DAC | -0.35 V to +0.35 V (doubled in case of differential or High Z load) |

Accuracy

| | |
|-----|---|
| AMP | $\pm(1\% \text{ of setting} + 5 \text{ mV})$ |
| DAC | $\pm(6\% \text{ of Vocm range} + 5 \text{ mV})$ |

¹ Rise/fall time is 10% to 90% of transition time.


² Temperature deviation = room temperature - 23 °C, when room temperature is out of the range of 20 °C - 30 °C.

General characteristics - Advanced mode

| | |
|---|---|
| Resolution | |
| AMP, DAC | 10 mV or 3 digits |
| Voltage window | Range (single-ended, 50 Ω load) |
| AMP | 1 μHz to 300 MHz: -5 V to 5 V > 300 MHz to 550 MHz: -4 V to 4 V > 550 MHz to 600 MHz: -3.5 V to 3.5 V (doubled in case of differential or High Z load) |
| DAC | -0.4 V to 0.4 V (doubled in case of differential or High Z load) |
| AC | -1 V to 1 V (doubled in case of High Z load) |
| Harmonic distortion | (Sine wave 32 points at 2.5 GS/s, 78.125 MHz, typical) |
| AMP (1 V_{p-p} single-ended) | < -56 dBc (single-ended or differential) |
| DAC (0.5 V_{p-p} single-ended) | < -60 dBc (single-ended or differential) |
| AC (1 V_{p-p} single-ended) | < -56 dBc |
| Spurious | (Sine wave 32 points at 2.5 GS/s, 78.125 MHz, typical) |
| AMP (1 V_{p-p} single-ended) | < -62 dBc (single-ended or differential) |
| DAC (0.5 V_{p-p} single-ended) | < -62 dBc (single-ended or differential) |
| AC (1 V_{p-p} single-ended) | < -55 dBc |
| SFDR | (Sine wave 32 points at 2.5 GS/s, 78.125 MHz, typical) |
| AMP (1 V_{p-p} single-ended) | < -56 dBc (single-ended or differential) |
| DAC (0.5 V_{p-p} single-ended) | < -60 dBc (single-ended or differential) |
| AC (1 V_{p-p} single-ended) | < -55 dBc |
| Rise/fall time | (10% to 90%, typical) |
| AMP | 800 ps |
| DAC | 450 ps |
| AC | 450 ps |
| Overshoot (typical) | |
| AMP | < 2% |
| DAC | < 1% |
| AC | < 2% |

General characteristics - Advanced mode

Level flatness (typical)

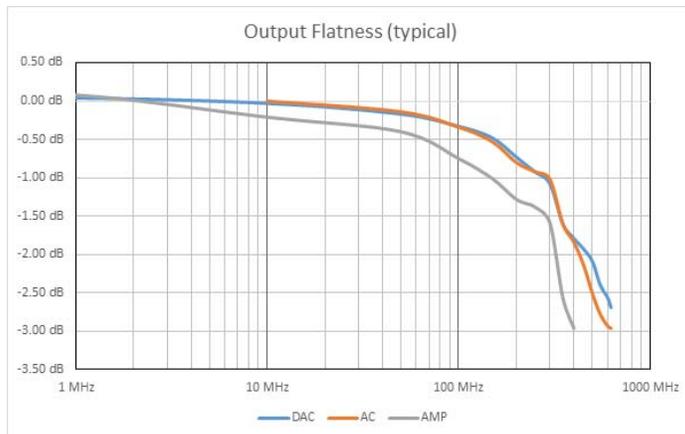

AMP (1 V_{p-p} Sine wave, relative to 1 kHz)

- 1 μHz to ≤ 10 MHz: < ±0.5 dBc
- > 10 MHz to ≤ 50 MHz: < ±1 dBc
- > 50 MHz to ≤ 150 MHz: < ±1.5 dBc
- > 150 MHz to ≤ 300 MHz: < ±2 dBc
- > 300 MHz to ≤ 350 MHz: < ±3 dBc
- > 350 MHz to ≤ 400 MHz: < ±3.5 dBc

DAC (1 V_{p-p} Sine wave, relative to 1 kHz)




- 1 μHz to ≤ 10 MHz: < ±0.5 dBc
- > 10 MHz to ≤ 100 MHz: < ±1 dBc
- > 100 MHz to ≤ 200 MHz: < ±1.5 dBc
- > 200 MHz to ≤ 300 MHz: < ±2 dBc
- > 300 MHz to ≤ 350 MHz: < ±2.5 dBc
- > 350 MHz to ≤ 450 MHz: < ±3 dBc
- > 450 MHz to ≤ 550 MHz: < ±3.5 dBc
- > 550 MHz to ≤ 650 MHz: < ±4 dBc
- > 650 MHz to ≤ 750 MHz: < ±4.5 dBc

AC (1 V_{p-p} Sine wave, relative to 10 MHz)

- 10 MHz to ≤ 50 MHz: < ±0.5 dBc
- > 50 MHz to ≤ 150 MHz: < ±1 dBc
- > 150 MHz to ≤ 200 MHz: < ±1.5 dBc
- > 200 MHz to ≤ 300 MHz: < ±2 dBc
- > 300 MHz to ≤ 450 MHz: < ±3 dBc
- > 450 MHz to ≤ 550 MHz: < ±3.5 dBc
- > 550 MHz to ≤ 650 MHz: < ±4.5 dBc
- > 650 MHz to ≤ 750 MHz: < ±5 dBc

General characteristics - Advanced mode

Phase noise (Sine wave 32 points at 2.5 GS/s, 78.125 MHz, 10 kHz offset, typical)
 AMP, DAC, AC -110 dBc/Hz

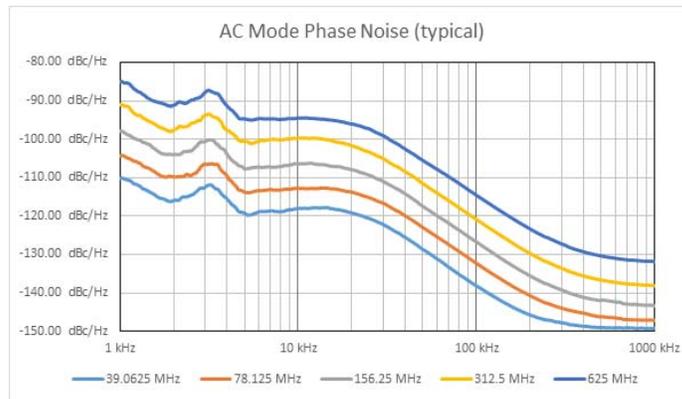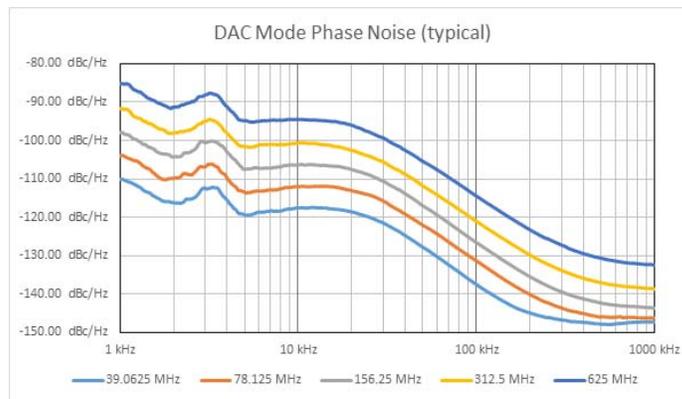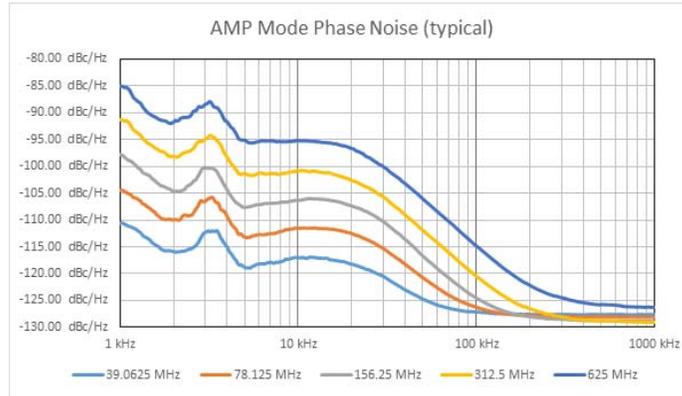

Random jitter on clock pattern (rms, typical)
 AMP, DAC < 5 ps

Total jitter on random pattern (peak-to-peak at 625 Mb/s, PRBS 15 data pattern, typical)
 AMP, DAC < 150 ps

Digital outputs (Optional)

Connector type FCI EYE® connector on front panel
 Number of connectors 2
 Number of outputs 32-bits (16-bits x 2 groups)

General characteristics - Advanced mode

| | |
|---|---|
| Output impedance | 100 Ω differential |
| Output type | LVDS |
| Rise/fall time (10% to 90%, typical) | 600 ps |
| Initial skew between digital outputs (typical) | < 500 ps between group A and B |
| Jitter (peak-to-peak, 2.5 GS/s, 1.25 Gb/s, PN15 pattern, BER = 1e-12) | 150 ps |
| Maximum update rate | 1.25 Gbps (full speed mode, maximum 16-bit) 625 Mbps (low speed mode, maximum 32-bit) |
| Memory depth (optional) | Half of analog waveform length (full speed mode) One fourth of analog waveform length (low speed mode) |

Auxiliary input and output characteristics

Marker out

| | |
|---|---|
| Connector type | SMA on front panel |
| Number of connectors | two, one for each analog output |
| Output impedance | 50 Ω |
| Output level (into 50 Ω) | 1 V to 2.5 V |
| Resolution | 10 mV |
| Accuracy (typical) | $\pm(2\% \text{ setting} + 10 \text{ mV})$ |
| Variable delay control | 0 to 60606 ps |
| Resolution | 78 ps |
| Accuracy (typical) | $\pm(10\% \text{ of setting} + 140 \text{ ps})$ |
| Rise/fall time (10% to 90%, 2.5 V, typical) | 800 ps |
| Total jitter on random pattern (peak-to-peak, 2.5 GS/s, 1.25 Gb/s, PN15 pattern, output level 2.5 V, BER = 1e-12) | 155 ps |

Trigger/Gate input

| | |
|---|---|
| Connector | SMA on the Front Panel |
| Input impedance | 1.1 k Ω |
| Slope/Polarity | Positive or negative selectable |
| Input damage level | < -15 V or > +15 V |
| Threshold control level | -10 V to 10 V |
| Resolution | 50 mv |
| Threshold control accuracy (typical) | $\pm(10\% \text{ of } \text{setting} + 0.2 \text{ V})$ |
| Input voltage swing | 0.5 V _{p-p} minimum |
| Minimum pulse width | 12 ns |
| Initial trigger/gate delay to Analog Output | Basic mode: 332.8 ns \pm 400 ps Advanced mode: 20 ns + 2288 sampling clock cycles \pm 1 sampling clock cycle |
| Trigger In to output jitter (typical) | \pm 2 sampling clock |

Auxiliary input and output characteristics

Sync in/out

| | |
|---------------------------------|---------------------------------------|
| Connector type | Infiniband 4X connector on rear panel |
| Master to Slave delay (typical) | 48.6 ns |

Reference clock input

| | |
|--------------------------------|-------------------------------------|
| Connector type | SMA on rear panel |
| Input impedance | 50 Ω , AC coupled |
| input voltage range | -5 dBm to 4 dBm sine or square wave |
| Damage level | +8 dBm or $\pm 15 V_{DC}$ Max |
| Variable Input Frequency range | 10 MHz to 80 MHz |

Reference clock output

| | |
|-----------------------|---|
| Connector type | SMA on rear panel |
| Output impedance | 50 Ω , AC coupled |
| Frequency | 10 MHz |
| Accuracy | $\pm 1.0 \times 10^{-6}$ |
| Aging | $\pm 1.0 \times 10^{-6}$ /year |
| Amplitude (typical) | 1.6 V_{p-p} into 50 Ω 3.2 V_{p-p} into High Z |
| Jitter (rms, typical) | 11.5 ps |

External Sampling Clock input

| | |
|---------------------|-------------------------------|
| Connector type | SMA on rear panel |
| Input impedance | 50 Ω , AC coupled |
| Number of inputs | Two, one for each channel |
| Frequency range | 1.25 GHz to 2.5 GHz |
| Input voltage range | -5 dBm to 4 dBm |
| Damage level | +8 dBm or $\pm 15 V_{DC}$ Max |

External Modulation input

| | |
|---------------------|---|
| Connector type | BNC on rear panel |
| Input impedance | 10 K Ω |
| Number of inputs | Two, one for each channel |
| Bandwidth (typical) | 10 MHz with 50 MS/s sampling rate |
| Input voltage range | -1 V to +1 V (except FSK, PSK) FSK, PSK: 3.3 V |
| Vertical resolution | 14-bit |

CPU Module and peripherals

| | |
|---------------------|--|
| CPU | The 4 th generation Intel® Core™ i7/i5/i3 Processor |
| Memory | 4 GB x 2, DDR3-DRAM |
| Hard disk drive | Removable hard disk drive, 500 Gbyte, 2.5-inch SATA |
| USB host ports | USB 2.0 x 2 on rear panel USB 3.0 x 2 on front panel |
| USB device port | USB 2.0 x 1 on rear panel Type B |
| LAN | 10/100/1000 BASE-T on rear panel |
| Real time clock | CR2032 lithium battery with lifetime approximately 3 years |
| Display | |
| Size | 10.4 in. LCD, 210.4 mm (8.3 in.) x 157.8 mm (6.2 in.) |
| Resolution | 1024 x 768 |
| Luminance (typical) | 400 cd/m ² |
| Touch screen | Built-in, resistive |

Power supply

| | |
|------------------------------|--|
| Source voltage and frequency | 100 to 240 V _{rms} @ 50 - 60 Hz 115 V _{rms} @ 400 Hz |
| Power consumption | 150 W maximum |
| Surge current | 30 A peak (25 °C) for ≤ 5 line cycles, after product has been turned off for at least 30 s |

Physical characteristics

| | |
|--|---|
| Weight (typical) | |
| Net weight | 6.5 kg (14.2 lbs) |
| Net weight with packaging | 11.5 kg (25.2 lbs) |
| Dimensions | |
| Height | 233 mm (9.17 in.) |
| Width | 439 mm (17.28 in.) |
| Depth | 199 mm (7.82 in.) |
| Dimensions with packaging (typical) | |
| Height | 498 mm (19.61 in.) |
| Width | 457 mm (17.99 in.) |
| Depth | 574 mm (22.60 in.) |
| Clearance | ≥50.8 mm (2.0 in.) on left and rear sides of the instrument |

EMC, environmental, and safety characteristics

Temperature

| | |
|---------------|------------------------------------|
| Operating | +5 °C to +50 °C (+41 °F to 122 °F) |
| Non-operating | -20 °C to +60 °C (-4 °F to 140 °F) |

Humidity

| | |
|---------------|---|
| Operating | 8% to 90% relative humidity with a maximum wet bulb temperature of 29 °C at or below +50 °C, non-condensing |
| Non-operating | 5% to 98% relative humidity with a maximum wet bulb temperature of 40 °C at or below +60 °C, non-condensing |

Altitude

| | |
|---------------|------------------------|
| Operating | 3,000 m (9,843 feet) |
| Non-operating | 12,000 m (39,370 feet) |

Regulatory

| | |
|-----------|--|
| Safety | UL61010-1, CAN/CSA C22.2 No.61010-1, EN61010-1, IEC61010-1 |
| Emissions | CISPR 11, Class A, EN61000-3-2:2006, EN 61000-3-3:1995 |
| Immunity | EN 61326-1:2006, IEC 61000-4-2:2001, IEC 61000-4-3:2002, IEC 61000-4-4:2004, IEC 61000-4-5:2001, IEC 61000-4-6:2003, IEC 61000-4-11:2004 |

Regional certifications

| | |
|-----------------------|---------------|
| European union | EN61326-1 |
| Australia/New Zealand | CISPR 11:2003 |

Ordering information

Models

| | |
|---------|--|
| AWG4162 | Arbitrary Waveform Generator, 2 analog channels, 2.5 GS/s sampling rate, 14-bit resolution, 1 MSa arbitrary memory depth |
|---------|--|

Options

| | |
|--------|--------------------------|
| -MEM16 | 16 Mpts arbitrary memory |
| -MEM32 | 32 Mpts arbitrary memory |
| -MEM64 | 64 Mpts arbitrary memory |
| -DO16 | 16-bit digital outputs |
| -DO32 | 32-bit digital outputs |

Instrument options

Power plug options

| | |
|----------|--|
| Opt. A0 | North America power plug (115 V, 60 Hz) |
| Opt. A1 | Universal Euro power plug (220 V, 50 Hz) |
| Opt. A2 | United Kingdom power plug (240 V, 50 Hz) |
| Opt. A3 | Australia power plug (240 V, 50 Hz) |
| Opt. A5 | Switzerland power plug (220 V, 50 Hz) |
| Opt. A6 | Japan power plug (100 V, 50/60 Hz) |
| Opt. A10 | China power plug (50 Hz) |
| Opt. A11 | India power plug (50 Hz) |
| Opt. A12 | Brazil power plug (60 Hz) |
| Opt. A99 | No power cord |

Language options

| | |
|----------|-----------------------------|
| Opt. L0 | English overlay (default) |
| Opt. L1 | French overlay |
| Opt. L3 | German overlay |
| Opt. L5 | Japanese overlay |
| Opt. L7 | Simplified Chinese overlay |
| Opt. L8 | Traditional Chinese overlay |
| Opt. L9 | Korean overlay |
| Opt. L10 | Russian overlay |
| Opt. L99 | No overlay |

Service options

| | |
|-----------|---|
| Opt. C3 | Calibration Service 3 Years |
| Opt. C5 | Calibration Service 5 Years |
| Opt. D1 | Calibration Data Report |
| Opt. D3 | Calibration Data Report 3 Years (with Opt. C3) |
| Opt. D5 | Calibration Data Report 5 Years (with Opt. C5) |
| Opt. G3 | Complete Care 3 Years (includes loaner, scheduled calibration, and more) |
| Opt. G5 | Complete Care 5 Years (includes loaner, scheduled calibration, and more) |
| Opt. R5 | Repair Service 5 Years (including warranty) |
| Opt. R5DW | Repair Service Coverage 5 Years (includes product warranty period). 5-year period starts at time of instrument purchase |

Accessories

Standard accessories

| | |
|-------------------------|--|
| Power cord | Country specific |
| Quick start user manual | |
| Software CD | CD containing all relevant software (ArbExpress, TekVISA, .Net, and system recovery) |
| Documentation CD | CD containing all relevant documentation |
| Calibration certificate | Certificate of traceable calibration |
| Accessory pouch | Captive bag to store accessories |
| 200-5130-xx | Front cover |
| 174-4401-00 | USB type A to type B cable – three feet |
| 119-6107-xx | Touch-screen stylus |

Optional accessories

| | |
|---------------|--|
| RFX100 | RFXpress software |
| AWG4SYNC | Synchronization cable |
| AWG4DIG16LVDS | Digital output cable (16-bit) |
| AWG4DIGSCKT | Connector mounted on DUT connects to LVDS cable (manufacture part number: U65-B12-40E0C, Amphenol) |
| AWG4HDDE | Hard Disk Drive |

Recommended accessories

| | |
|-------------|---|
| 012-1690-xx | SMA cable |
| 174-4401-00 | USB type A to type B cable – three feet |
| 174-5194-00 | USB type A to type B cable – six feet |
| TEK-USB-488 | GPIO-to-USB adapter |
| HCTEK54 | Hard transit case |
| RMD5000 | Rackmount kit |
| 119-7083-xx | Mini keyboard (USB interface) |
| 119-6297-xx | Full-size keyboard with 4-port USB hub |
| - | USB Mouse |

Warranty

Three-year warranty on parts and labor

Instrument upgrades

Instrument upgrades

| Item | Before upgrade | After upgrade | Order product |
|---------------------------|----------------|---------------|---------------|
| Arbitrary waveform memory | 1 Mpts | 16 Mpts | AWG4M01T16 |
| | 1 Mpts | 32 Mpts | AWG4M01T32 |
| | 1 Mpts | 64 Mpts | AWG4M01T64 |
| | 16 Mpts | 32 Mpts | AWG4M16T32 |
| | 16 Mpts | 64 Mpts | AWG4M16T64 |
| | 32 Mpts | 64 Mpts | AWG4M32T64 |
| Digital output channel | None | 16 bit | AWG4D00T16 |
| | None | 32 bit | AWG4D00T32 |
| | 16 bit | 32 bit | AWG4D16T32 |



Tektronix is registered to ISO 9001 and ISO 14001 by SRI Quality System Registrar.



Product Area Assessed: The planning, design/development and manufacture of electronic Test and Measurement instruments.

Datasheet

ASEAN / Australasia (65) 6356 3900
Belgium 00800 2255 4835*
Central East Europe and the Baltics +41 52 675 3777
Finland +41 52 675 3777
Hong Kong 400 820 5835
Japan 81 (3) 6714 3086
Middle East, Asia, and North Africa +41 52 675 3777
People's Republic of China 400 820 5835
Republic of Korea +822 6917 5084, 822 6917 5080
Spain 00800 2255 4835*
Taiwan 886 (2) 2656 6688

Austria 00800 2255 4835*
Brazil +55 (11) 3759 7627
Central Europe & Greece +41 52 675 3777
France 00800 2255 4835*
India 000 800 650 1835
Luxembourg +41 52 675 3777
The Netherlands 00800 2255 4835*
Poland +41 52 675 3777
Russia & CIS +7 (495) 6647564
Sweden 00800 2255 4835*
United Kingdom & Ireland 00800 2255 4835*

Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777
Canada 1 800 833 9200
Denmark +45 80 88 1401
Germany 00800 2255 4835*
Italy 00800 2255 4835*
Mexico, Central/South America & Caribbean 52 (55) 56 04 50 90
Norway 800 16098
Portugal 80 08 12370
South Africa +41 52 675 3777
Switzerland 00800 2255 4835*
USA 1 800 833 9200

* European toll-free number. If not accessible, call: +41 52 675 3777

For Further Information. Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit www.tek.com.

Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.



01 Jun 2016 76W-60255-0

www.tek.com

Tektronix[®]

